



FEMALE END VIEW





- 1 = BARE (SHIELD)
2 = RED (+ VOLTAGE)
3 = BLACK (- VOLTAGE)
4 = WHITE (CAN_H)
5 = BLUE (CAN_L)




SPECIFICATIONS

HOUSING MATERIAL/COLOR	GLASS FILLED NYLON/BLACK
CONTACT MATERIAL/PLATING	BRASS/GOLD
COUPLING NUT MATERIAL/PLATING	DIECAST ZINC/NICKEL
RATED CURRENT [A]	9.0 A
RATED VOLTAGE [V]	250 V
MAXIMUM WIRE SIZE	16 AWG
TERMINATION METHOD	SCREW TERMINAL
TEMPERATURE RATING	-40°C to +85°C (-40°F to +185°F)
PROTECTION CLASS	IP 67
CABLE GRIP RANGE	PG 9 = 6-8mm

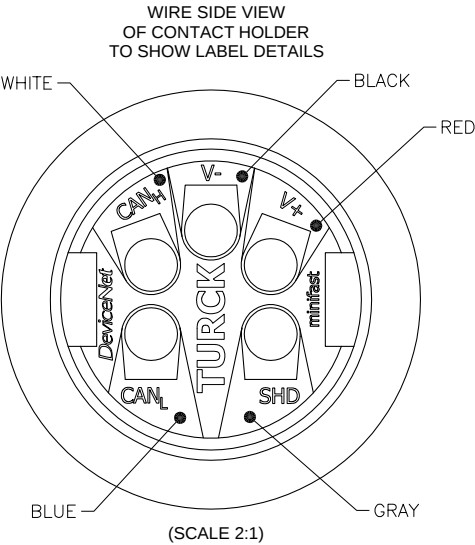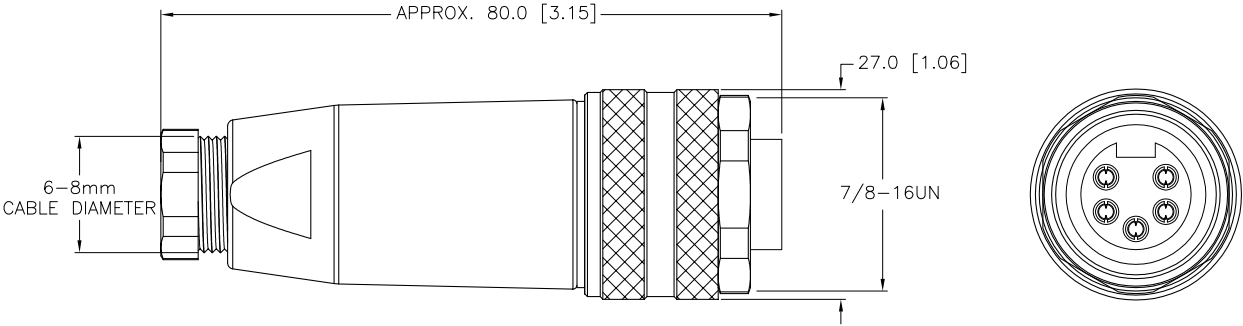

SOURCE DRAWING - FOR REFERENCE ONLY

RELATED DOCUMENTS		3RD ANGLE PROJECTION		THIS DRAWING IS PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED. TURCK inc <i>High Technology Sensors and Automation Controls</i>		3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax turck.com							
1.													
2.													
3.													
4.													
MATERIAL		ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY CONTACT TURCK FOR MORE INFORMATION		DRFT		RDS		DATE 07/19/07		DESCRIPTION B 4151-0/9/DNET			
SEE SPECIFICATIONS				DSGN				SCALE 1=1.0					
				UNIT OF MEASUREMENT MILLIMETER [INCH] DO NOT SCALE THIS DRAWING						IDENTIFICATION NO. U3-01268		REV B	
FINISH													
SEE SPECIFCATIONS										FILE: U3-01268		SHEET 1 OF 1	

B	UPDATE GRAPHICS FOR COUPLING, SEE ECO	RWC	05/10/10	30247
REV	DESCRIPTION	BY	DATE	ECO NO.