


REV	DOCUMENT	CHANGED BY	CHECK
1	204327	WJC 07NOV01	SAV

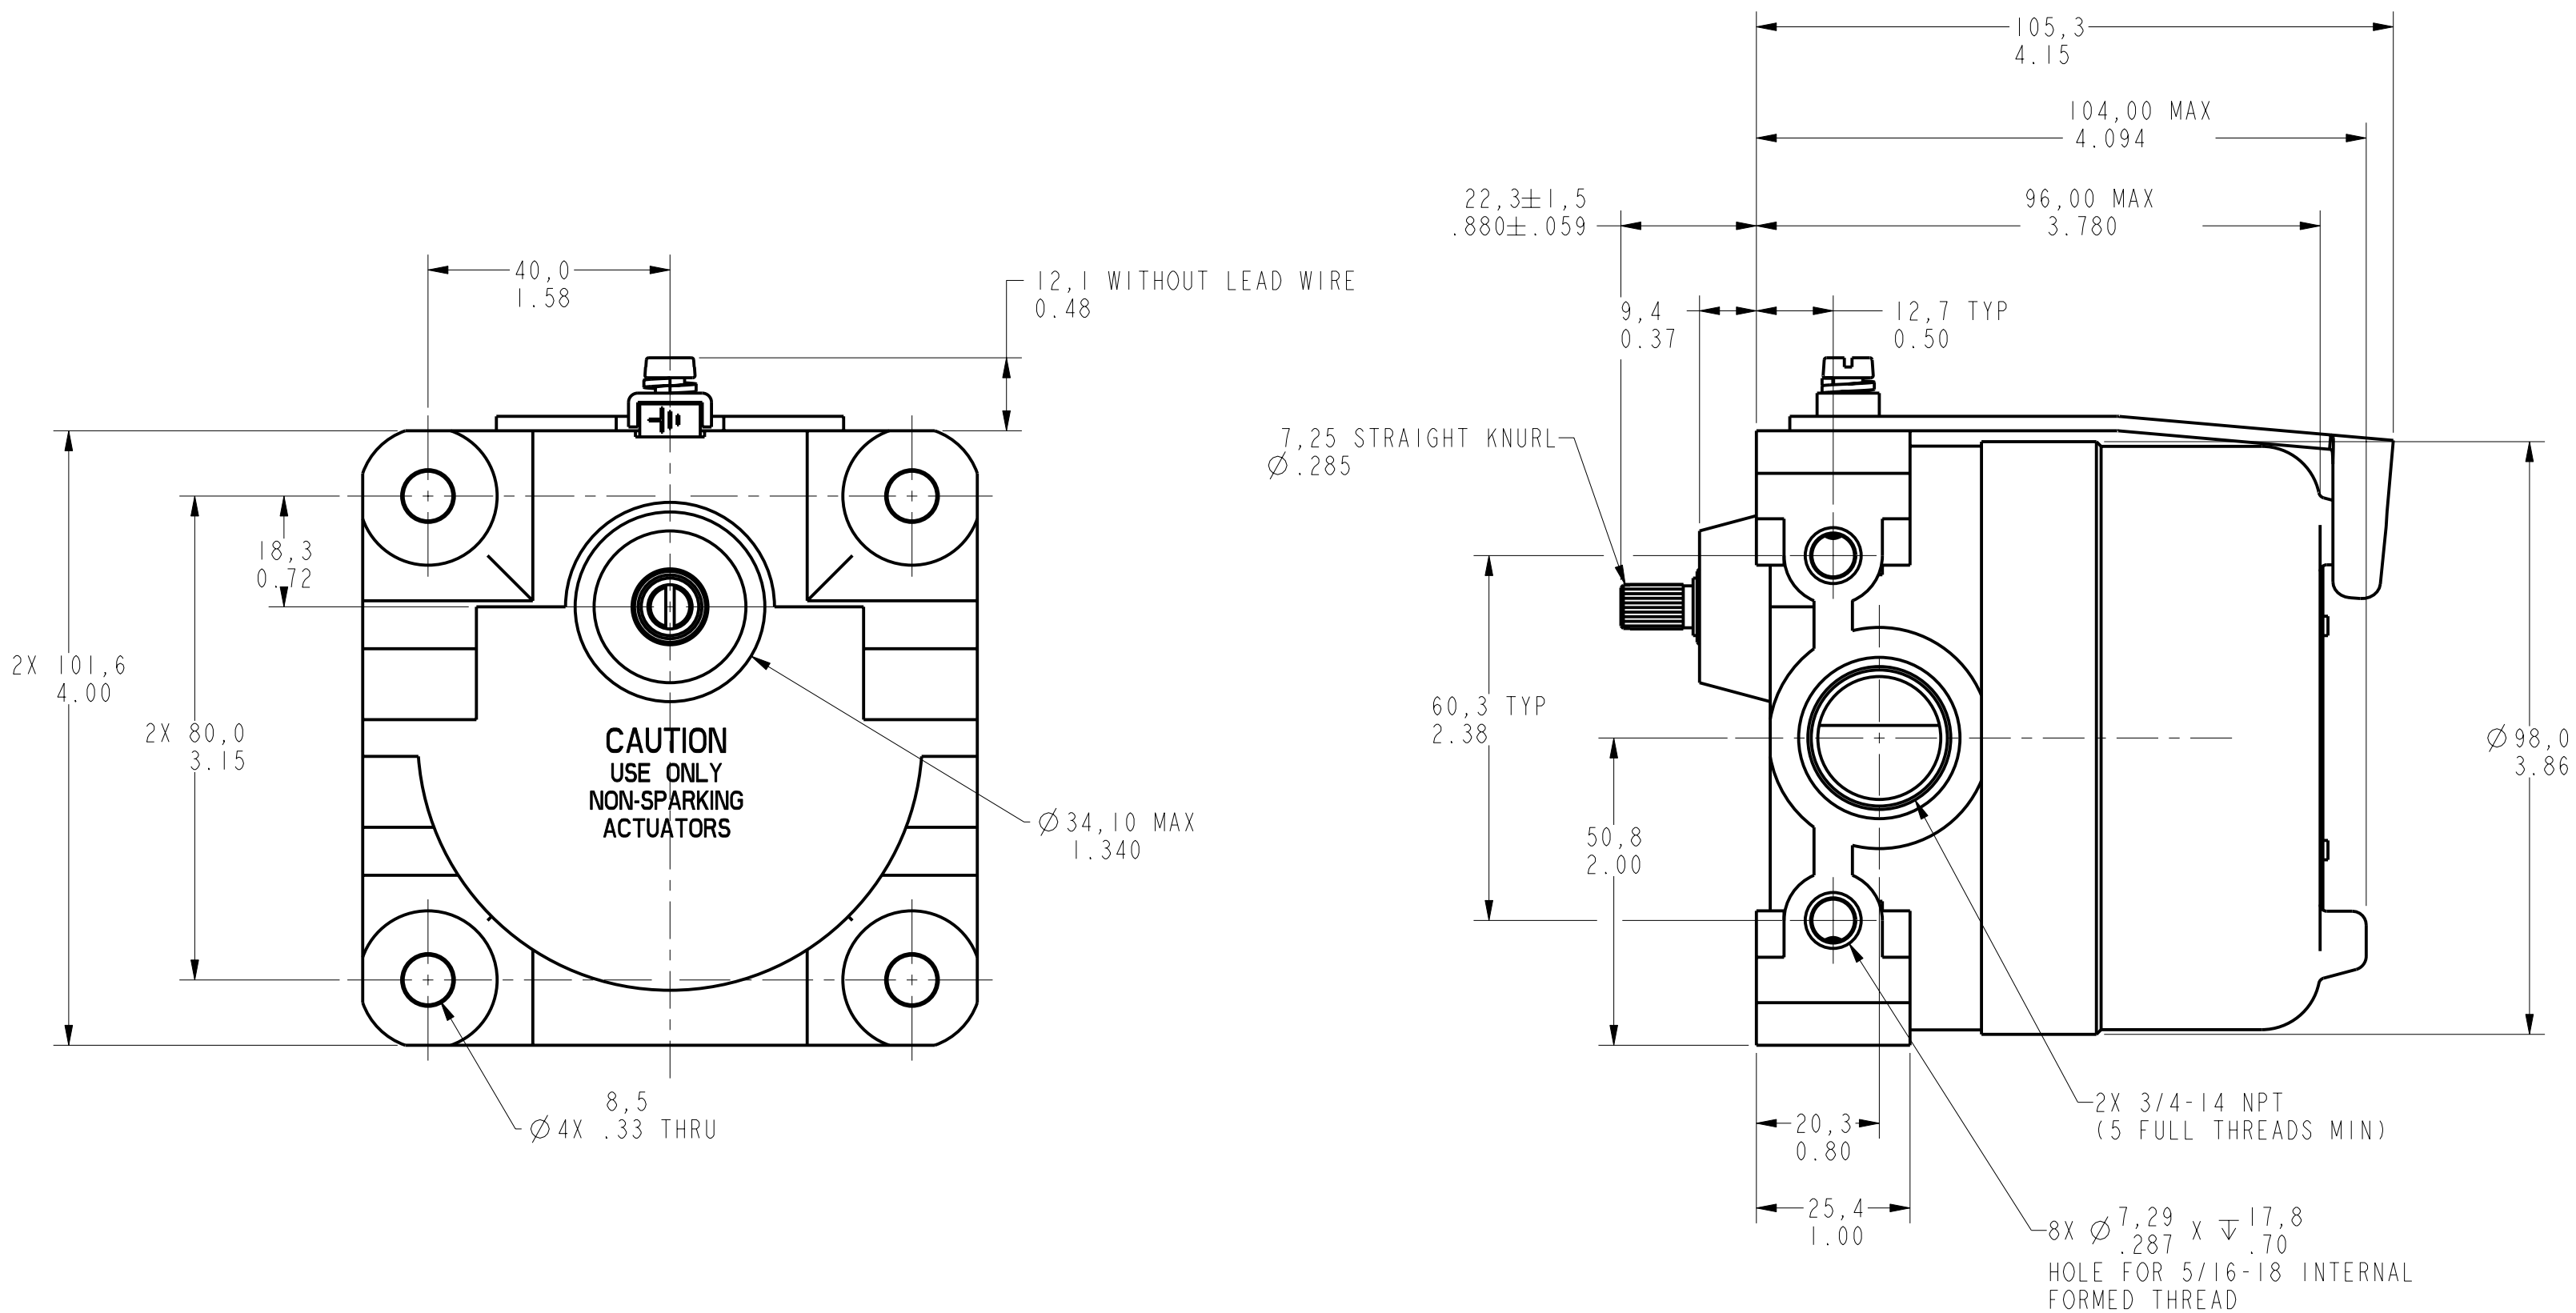

NOTES

- 1 - EXPLOSION PROOF - UNDERWRITERS LAB INC LISTING FOR HAZARDOUS LOCATIONS CLASS I, GROUPS B, C AND D; CLASS II GROUPS E, F AND G
 - 2 - EUROPEAN HAZARDOUS LOCATIONS DESIGNATION: EExd IIC T6 CATEGORY II 2 GD
 - 3 - ALUMINUM ENCLOSURE FINISHED WITH BLUE AND BLACK EPOXY PAINT
 - 4 - 4-20 ma ANALOG OUTPUT, ADJUSTABLE CW OR CCW FOR 15° TO 90° SPANS
 - 5 - FOR USE IN TEMPERATURES UP TO 85°C
 - 6 - SEE 7CX CHARTS 1 AND 2 (1 DRAWING) FOR LEVER ACTUATORS
 - 7 - UNIT PROVIDES NO SHAFT RESTORING FORCE, THE ACTUATION DEVICE MUST CONTROL MOVEMENT OF SHAFT
- WEIGHT: 2.49 LB(1.13 Kg) APPROX

CHARACTERISTICS		ELECTRICAL DATA		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE:		DRAWN		Honeywell Sensing and Control			
OPERATING TORQUE--- 0.50 nM / .369 LB FT MAX		CONTACT ARRANGEMENT S P D T		NO PLACE X ±.040 ±1 ONE PLACE .X ±.030 ±0.4 TWO PLACE .XX ±.015 ±0.15 THREE PLACE .XXX ±.005 ± ANGLES ± RAW MATERIAL-COMMERCIAL STANDARD		CHECK SAV 07NOV01					
OVERTRAVEL-----90° MAX		UL LISTED-FILE E 68247 ANALOG OUTPUT: 4-20 ma VOLTAGE RANGE: 12.5 TO 40 VDC USE CLASS 2 POWER SUPPLY		THIRD ANGLE PROJECTION		THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF HONEYWELL SENSING AND CONTROL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE PERMISSION OF HONEYWELL.		TITLE			
		   				DIMENSIONS ARE TO BE MET BEFORE PROTECTIVE COATINGS ARE APPLIED		SIZE	DWG TYPE	DRAWING NAME	REV
						3D PTC ASME Y14.5M-1994		C	I	18CX10E	1
								SCALE	FULL	WEIGHT	1 OF 1