


REV	DOCUMENT	CHANGED BY	CHECK
A	0005401	DVM 17MAY04	AK

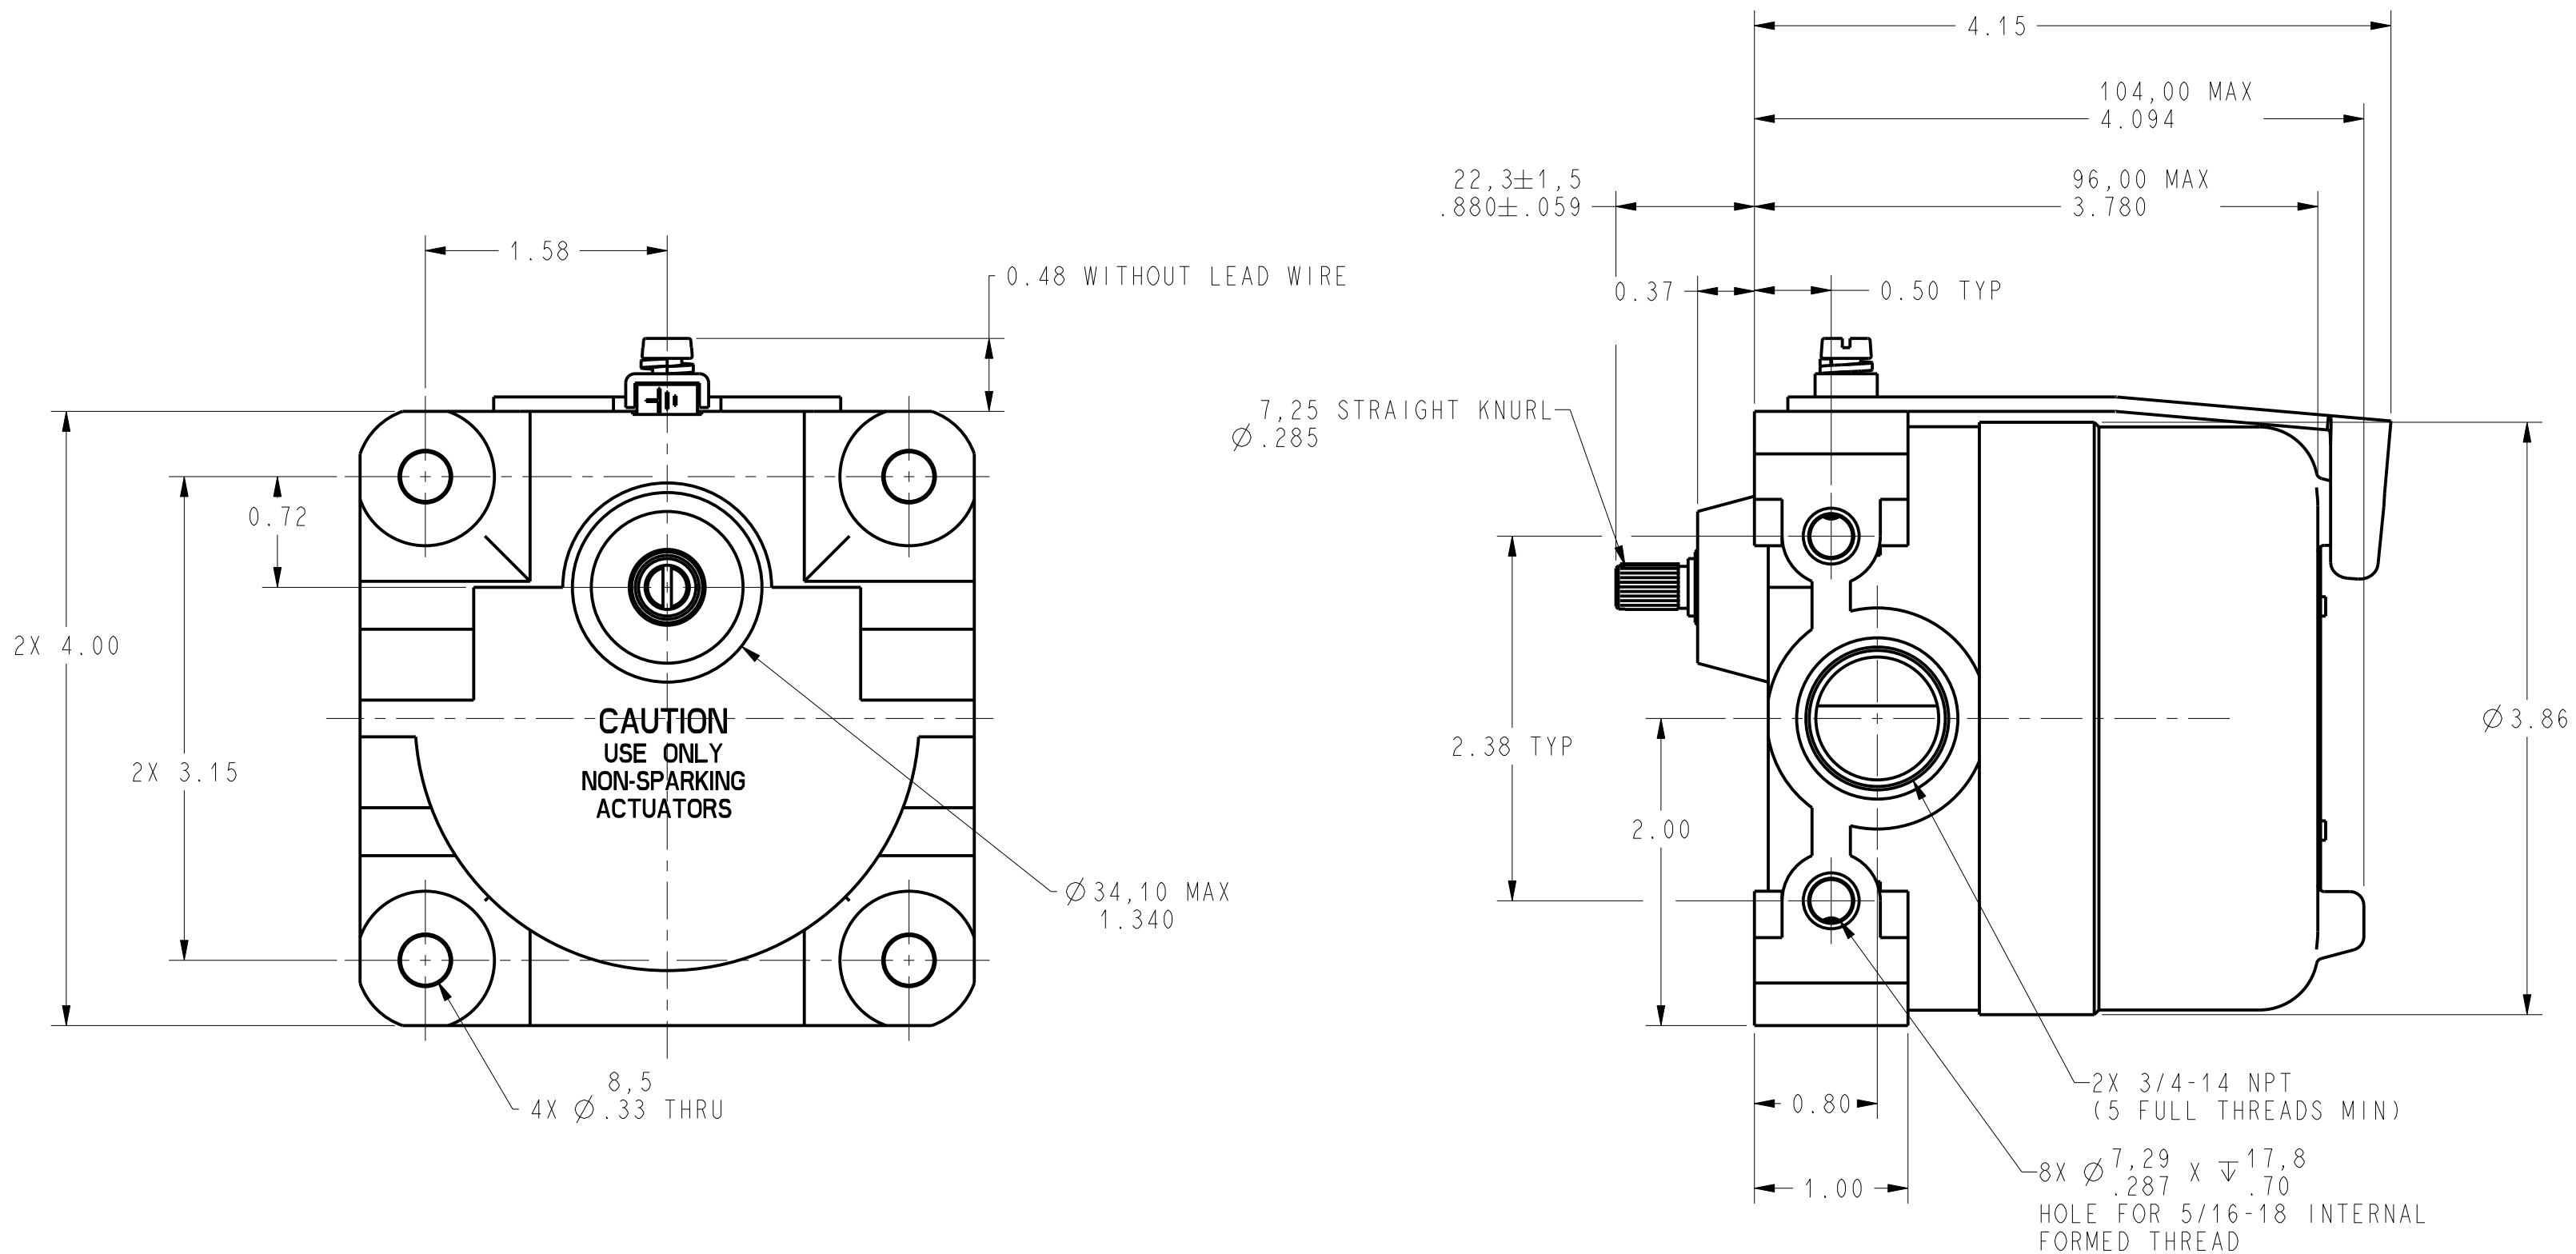

- NOTES
- 1 - EXPLOSION PROOF - UNDERWRITERS LAB INC LISTING FOR HAZARDOUS LOCATIONS CLASS 1, GROUPS B,C AND D; CLASS 2 GROUPS E, F AND G
 - 2 - EUROPEAN HAZARDOUS LOCATIONS DESIGNATION: EExd IIC T6 CATEGORY II 2 GD
 - 3 - ALUMINUM ENCLOSURE FINISHED WITH BLUE AND BLACK EPOXY PAINT
 - 4 - 6-32 UNC X (4.75) (.188) PAN HEAD TERMINAL SCREW (6 PER BASIC) (SEMS TERMI-LOX) (3 PER BASIC)
 - 5 - CAMS MAY BE REPOSITIONED IN 7°20' INCREMENTS
 - 6 - 1 BASIC; OPERATES CLOCKWISE AND COUNTER CLOCKWISE
 - 7 - FOR USE IN TEMPERATURES UP TO 85°C
 - 8 - SEE 7CX CHARTS 1 AND 2 (1 DRAWING) FOR LEVER ACTUATORS
 - 9 - WEIGHT: 2.49 LB (1.13 Kg) APPROX

CHARACTERISTICS		ELECTRICAL DATA		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE: ☒ US (inch) CUSTOMARY ☐ SI (mm) METRIC		DRAWN		DVM		17MAY04		Honeywell					
		CONTACT ARRANGEMENT D P D T				CHECK		AK		17MAY04							
OPERATING TORQUE----- .922 LB FT (1.25 Nm) MAX		L159 10A-125 OR 250 VAC 0.3A-125 VDC; 0.15A-250 VDC		NO PLACE X ±.040 ±1		THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE PERMISSION OF HONEYWELL.		DIMENSIONS ARE TO BE MET BEFORE PROTECTIVE COATINGS ARE APPLIED		3D PTC		ASME Y14.5M-1994		TITLE SWITCH, ENCLOSED		SIZE DWG TYPE DRAWING NAME REV	
ONE PLACE .X ±.030 ±0.4																	
TWO PLACE .XX ±.015 ±0.15																	
THREE PLACE .XXX ±.005 ±																	
ANGLES ± ±																	
DIFFERENTIAL TRAVEL----- 25° MAX				RAW MATERIAL-COMMERCIAL STANDARD													
OVERTRAVEL-----75° MIN				THIRD ANGLE PROJECTION													
		Ex CE UL CS															