

CATALOG LISTING

1EN577-RB

PAGE 1 OF 1

RELEASE NO. PR-22700

REPLACES

ISSUE

2

CHECK

REVISIONS

A PR22700

JAK

3 APR 97

CHECK





CHECK


DDM/CAD

DRAWN

J A K

3 APR 97

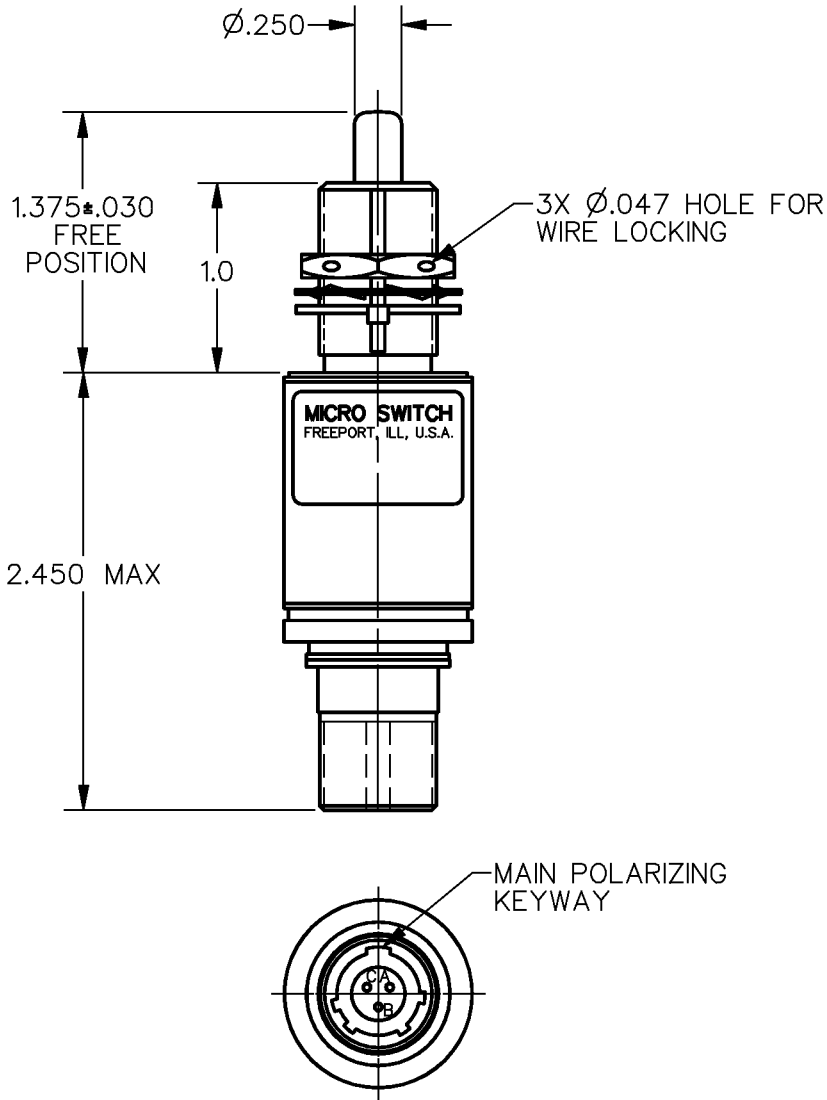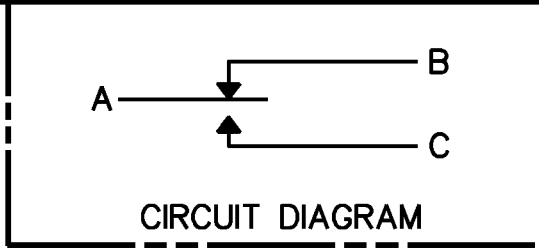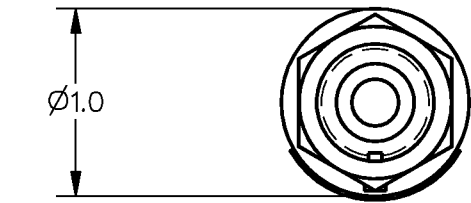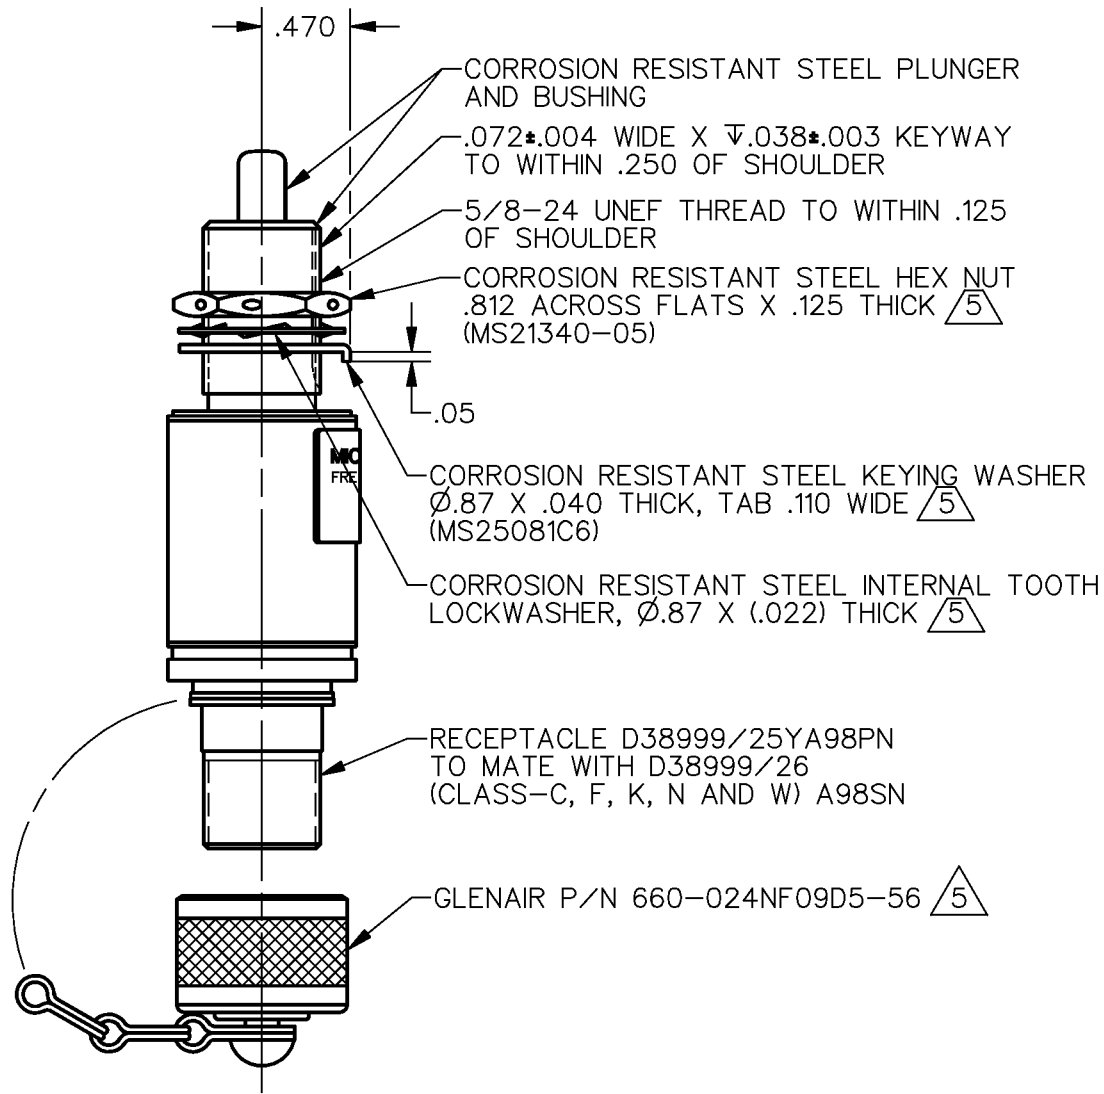

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH. A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH				THIRD ANGLE PROJECTION 		
CHARACTERISTICS		ELECTRICAL DATA			SCALE FULL	
OPERATING FORCE — — — — — 3-6 LB		CONTACT ARRANGEMENT S P D T			DO NOT SCALE PRINT	
FULL OVERTRAVEL FORCE— — — 17 LB MAX		LOAD	28 VDC		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE	
RELEASE FORCE— — — — — 2 LB MIN			SEA LEVEL	50,000 FT.		
PRETRAVEL— — — — — .040 MAX						
DIFFERENTIAL TRAVEL— — — .020 MAX			RES	4		ONE PLACE (.0) ±.030
OVERTRAVEL— — — — — .250 MIN			IND	2		TWO PLACE (.00) ±.015
				THREE PLACE (.000) ±.005		
				ANGLES ±		
				WEIGHT		

- NOTES
- 1 - CORROSION RESISTANT STEEL ENCLOSURE
 - 2 - SWITCH SEALED PER MIL-S-8805 SYMBOL 4
 - 3 - CIRCUIT DIAGRAM AND CATALOG LISTING ARE SHOWN ON NAMEPLATE
 - 4 - SASH CHAIN HAS SPLIT-RING END TO ATTACH ONTO SWITCH
 - ∇ 5 HARDWARE MAY BE PACKAGED UNASSEMBLED PER MIL-S-8805
 - 6 - SWITCH HAS A SILICONE O-RING PLUNGER SEAL

ANSI Y14.5M-1982 APPLIES