

IPB 73-T2

M

DRAWING
NUMBER

10

1980E

REPLACES

RELEASE NO. ETS SR 9055

89

000

F

У	СХ
---	----

60/

MA

$$\frac{2}{3}$$

21

CH	Δ
----	---

WIFE

41

44

0 | CHEC


MAY

26

MO

DRAWN

FO-50378

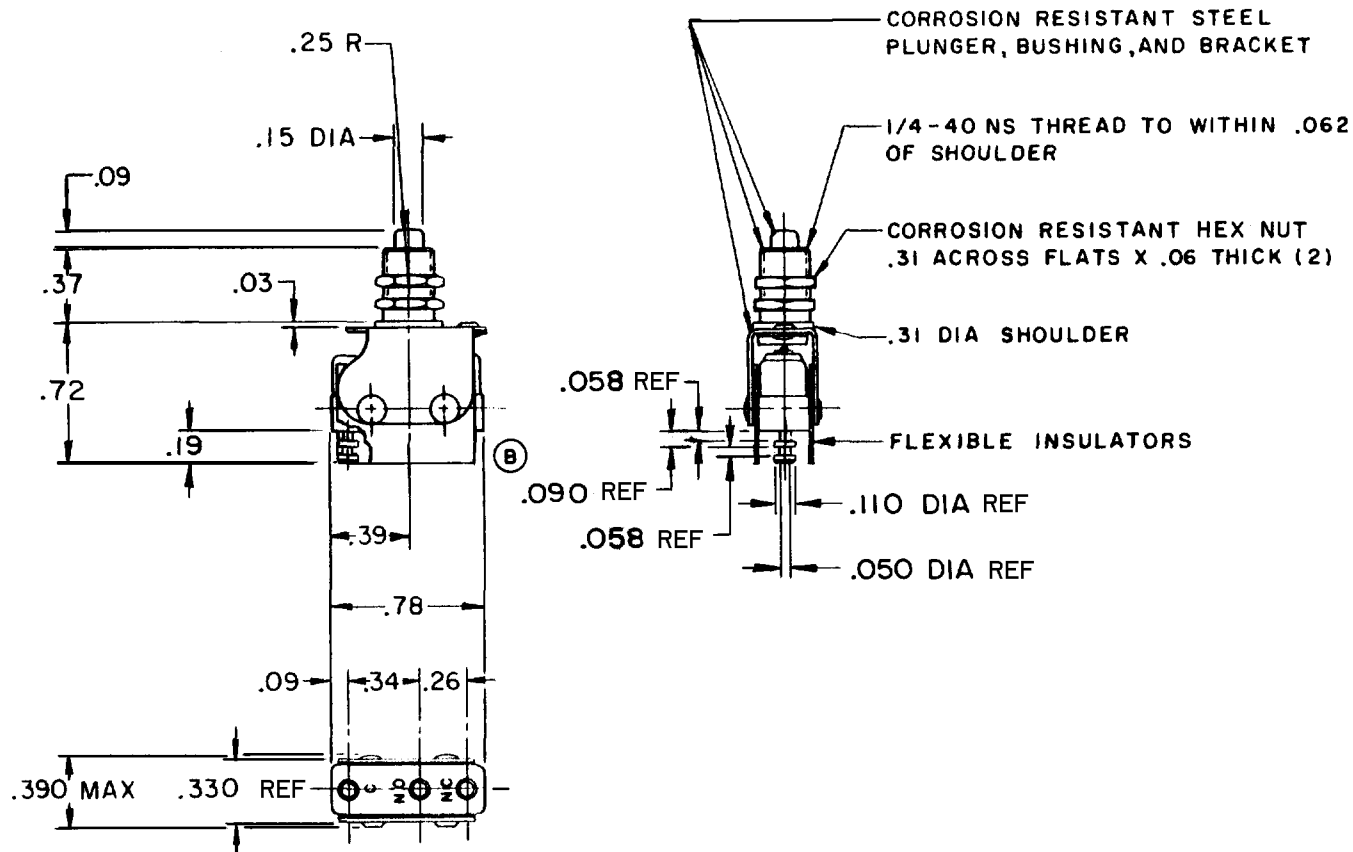

NOTES

- ③ 1-UNIT INCLUDES CAT. LIST."ISM" TYPE BASIC SWITCH
2-TERMINALS ARE PLATED FOR SOLDERING
3-RECOMMENDED FOR MANUAL OPERATION ONLY
4-CONTACT MATERIAL-24 K SOLID GOLD

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF MINNEAPOLIS-HONEYWELL REGULATOR CO. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

CHARACTERISTICS	ELECTRICAL DATA		SCALE FULL
OPERATING FORCE— — — — 1 LB APPROX	CONTACT ARRANGEMENT S P D T	BREAK DISTANCE .010 MIN	DO NOT SCALE PRINT
	30 VOLTS DC RATING		UNLESS OTHERWISE SPECIFIED
	INDUCTIVE — — — — SEA LEVEL — — 1/2 AMP 50,000 FT. — — — — 1/2 AMP RESISTIVE — — — — SEA LEVEL — — — — 1 AMP 50,000 FT. — — — — 1 AMP MAXIMUM INRUSH — — — — — — — — — — 2 AMP		DIMENSIONS ARE IN INCHES TOLERANCES ARE: ONE PLACE (.0) ±.030 TWO PLACE (.00) ±.015 THREE PLACE (.000) ±.005 ANGLES ±
			WEIGHT

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Honeywell:](#)

[1PB73-T2](#)