

MICRO SWITCH

FREEPORT ILLINOIS, U.S.A.
A DIVISION OF HONEYWELL


FED. MFG. CODE 91929

ASSEMBLY - SWITCH

CATALOG LISTING

17AC18-T

PUSH TO OPERATE-RETURNS AUTOMATICALLY
TO POSITION SHOWN. PULL TO OPERATE-
REMAINS IN OPERATED POSITION UNTIL NEXT
FULL STROKE OF PLUNGER

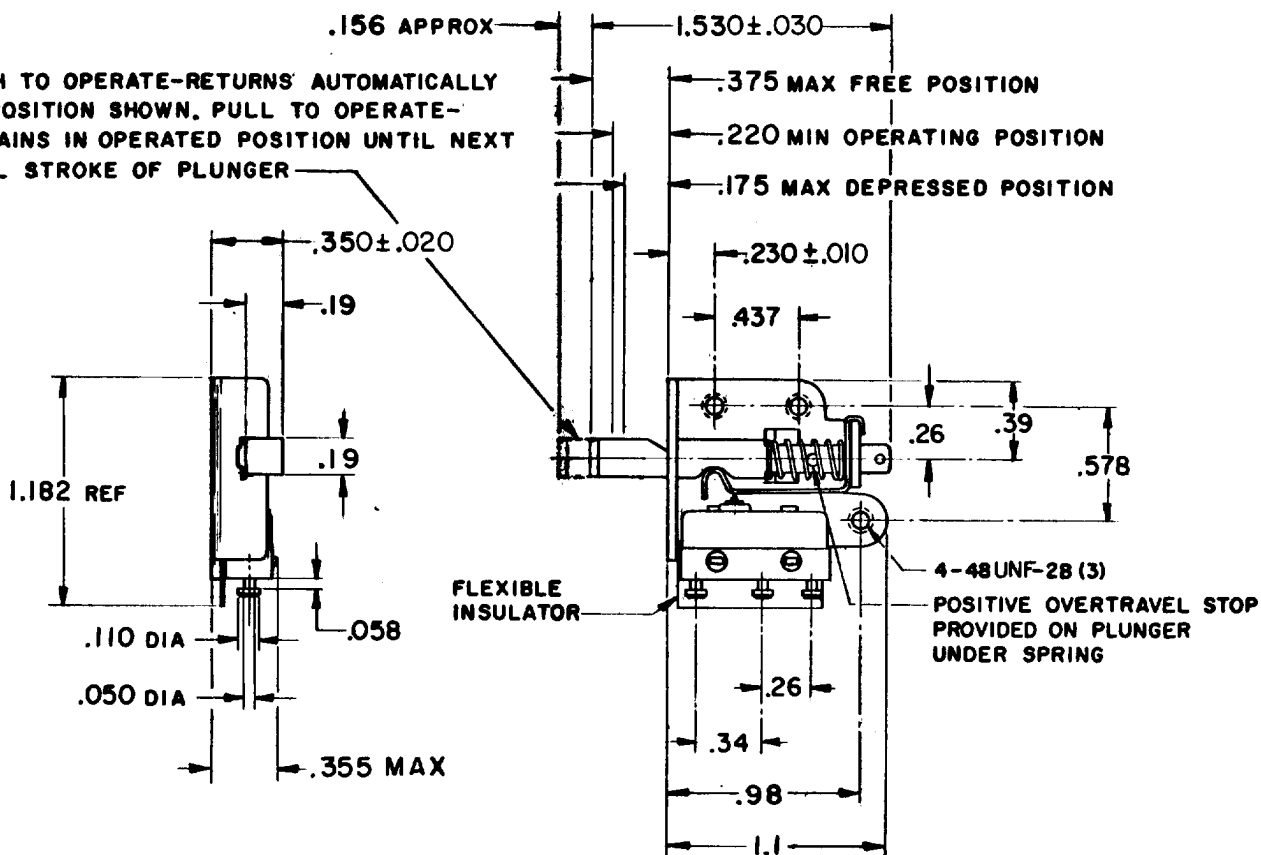

NOTE -

- 1-UNIT INCLUDES CAT. LIST. 11SM357-T BASIC SWITCH (1)
- 2-NOTCH IN ACTUATOR PLUNGER WILL PERMIT .045 MAX DISPLACEMENT BETWEEN END OF PLUNGER AND HOLE IN BRACKET

RASTER

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

CHARACTERISTICS

TOTAL TRAVEL
.156 APPROX PUSH DIRECTION
.156 APPROX PULL DIRECTION
FULL OVERTRAVEL --- 2 LB APPROX

ELECTRICAL DATA

CONTACT ARRANGEMENT
S P D T

250 VAC --- 5 AMP
30 VOLTS DC RATING
INDUCTIVE --- SEA LEVEL --- 3 AMP
50,000 FT --- 2.5 AMP
RESISTIVE --- SEA LEVEL --- 5 AMP
50,000 FT --- 5 AMP
MAXIMUM INRUSH --- 24 AMP

SCALE

DO NOT SCALE PRINT

UNLESS OTHERWISE
NOTED

DIMENSIONS ARE IN INCHES

TOLERANCES ARE:

ONE PLACE (.0) ± .030
TWO PLACE (.00) ± .015
THREE PLACE (.000) ± .005
ANGLES ±

WEIGHT .02 LB APPROX

17AC18-T

REPLACES

RELEASE NO. PR-152

07NOV08

RS

CHECK

07NOV08

MBH

07NOV08

JMG

CHECK

11JUN68

LSD

CHECK

27 MAY 68

OMW

27 MAY 68

OMW

27 MAY 68

OMW

FO-50378-1A

DRAWN