
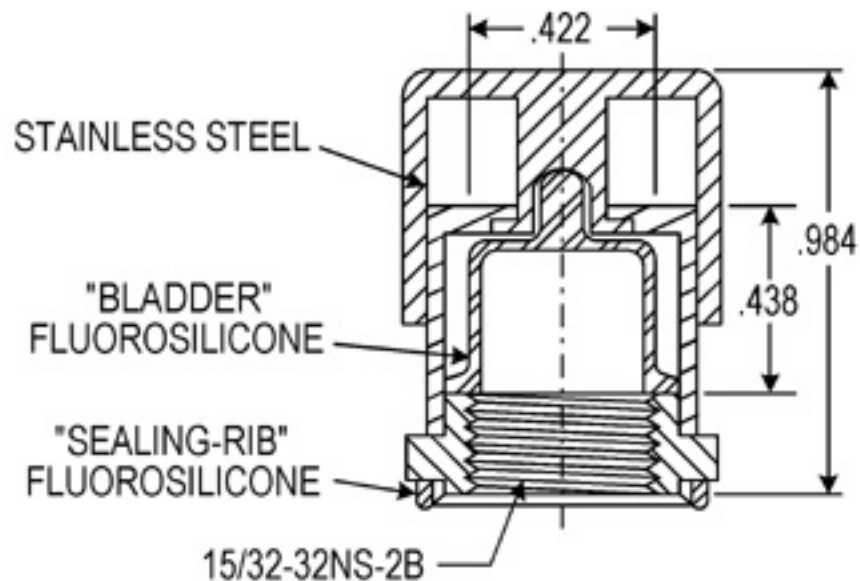


SPECIFICATIONS

Material: Casing - Stainless Steel
 Seal - Fluorosilicone Rubber GR 60
Mounting Nut: Stainless Steel
Temperature Range: HEXSEALS: -94°F to +400°F
Pressure Range: Exceeds 15 psi internal and 1500 psi external.
Operational Life: 50,000 actuations (minimum).
Shelf Life: Excess of 25 years.
Resistant to: Salt spray, sunlight, ozone, weather, fungus, and most acids and lubricating oils
Military Approvals: Most HEXSEALS are QPL-approved to MIL-B-5423.
Agency Recognition: E-SEELS and HEXSEALS are UL-listed to UL Std. 50 types 1-13, and meet CSA standards.
Installation: If a reducing adaptor is required - see page 14 of HEXSEAL catalog HEX200 for part numbers and drawing.

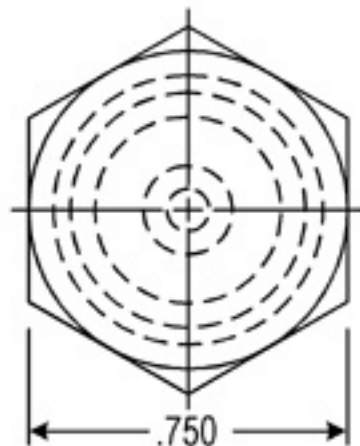

A	CAD COMPUTER GENERATED		10/23/02
REV.	DESCRIPTION		DATE
MAXIMUM AND MINIMUM MEASUREMENTS ARE STATED DIRECTLY ON EACH DIMENSION.	TITLE: ARMORED SEAL FOR PUSHBUTTON SWITCHES (1238/1 SS)	ENG. DWN. K.S.	10-14-81
MAT'L: STAINLESS STEEL & FLUROSILICONE RUBBER GR 60	APM-HEXSEAL CORPORATION	SCALE 2:1	(1238/1 SS) HEXSEAL®
FINISH: BRUSH		DWG. NO.	

THIS DRAWING COVERS PROPRIETARY ITEM AND IS THE PROPERTY OF THE APM-HEXSEAL CORPORATION. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE WRITTEN APPROVAL OF AN OFFICER OF THE APM-HEXSEAL CORPORATION.