


HONEYWELL
PART NUMBER
-

REV	DOCUMENT	CHANGED BY	CHECK
A	0005808	KSR 09JUN04	AK

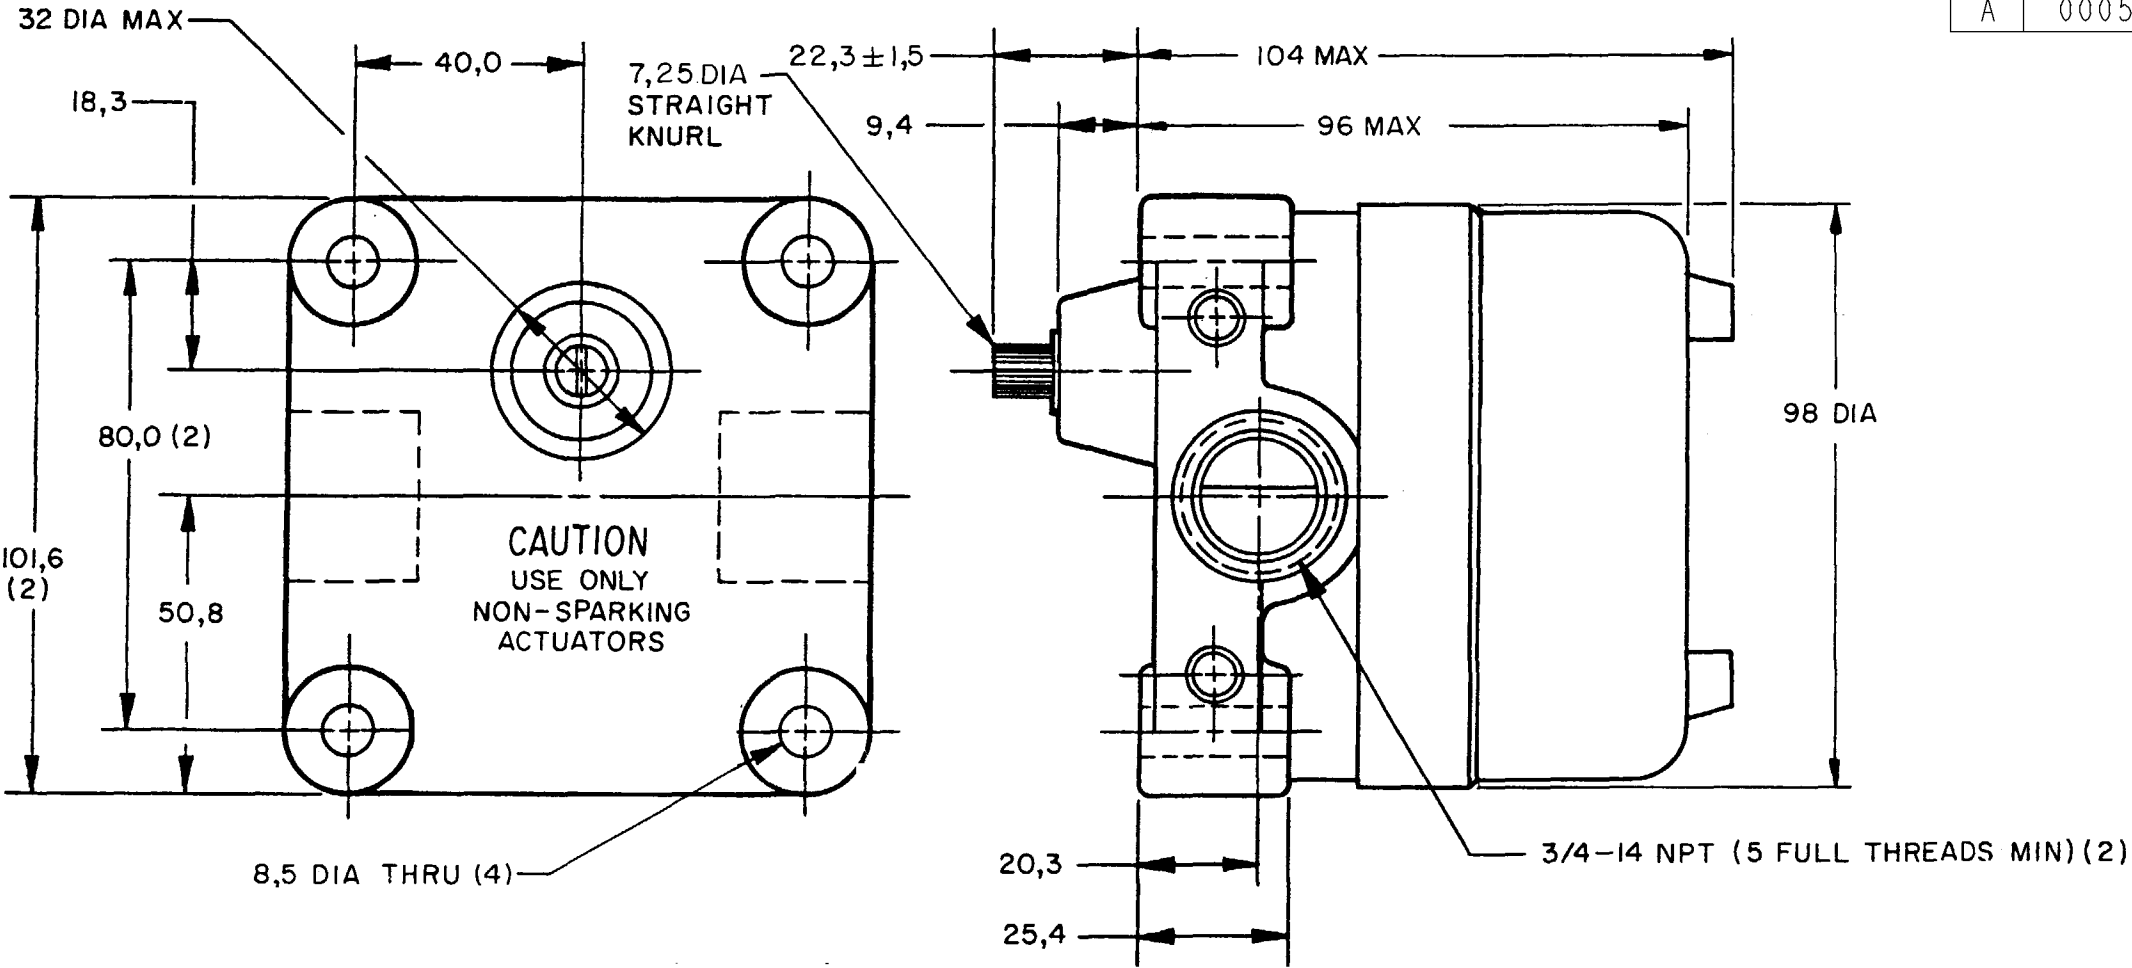

- NOTES
- 1 - EXPLOSION PROOF-UNDERWRITERS LAB INC LISTING FOR HAZARDOUS LOCATIONS CLASS I, GROUPS B, C AND D; CLASS II, GROUPS E, F AND G
 - 2 - ALUMINUM ENCLOSURE FINISHED WITH GRAY EPOXY PAINT
 - 3 - 4-20 ma ANALOG OUTPUT, ADJUSTABLE CW OR CCW FOR 15° TO 90° SPANS
 - 4 - FOR USE IN TEMPERATURES UP TO 85°C
 - 5 - SEE (M) 7CX CHARTS 1 & 2 FOR LEVER ACTUATORS
 - 6 - UNIT PROVIDES NO SHAFT RESTORING FORCE, THE ACTUATING DEVICE MUST CONTROL MOVEMENT OF SHAFT
 - 7 - ANALOG OUTPUT ONLY

CONVERSION CHART	
7,25	.285
7,92	.312
8,5	.33
9,4	.37
18,3	.72
20,3	.80
22,3±1,5	.880±.059
25,4	1.00
32,0	1.26
40,0	1.57
50,8	2.00
80,0	3.15
96,0	3.78
98,0	3.86
101,6	4.00
104,0	4.09
1,25 Nm	.922 PF

WEIGHT 1.13 Kg APPROX

CHARACTERISTICS		15CX	CONTACT ARRANGEMENT
OPERATING FORCE — — —	0,50 Nm MAX		
FULL OVERTRAVEL — — — —	90° MAX		

DESIGN UNITS: INCH	
TOLERANCES UNLESS NOTED:	
NO PLACE	X ± 0.040
ONE PLACE	.X ± 0.030
TWO PLACE	.XX ± 0.015
THREE PLACE	.XXX ± 0.005
FOUR PLACE	.XXXX ± 0.0005
ANGLES	X ± 2
THIRD ANGLE PROJECTION	

DRAWN	KSR	09 JUN 04
CHECK	AK	09 JUN 04
THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE PERMISSION OF HONEYWELL.		
INTERPRET PER ASME Y14.5M-1994 OTHER HONEYWELL ENGINEERING STANDARDS MAY APPLY		
RASTER		

Honeywell			
TITLE SWITCH - ENCLOSED			
SIZE	TYPE	DRAWING NAME	REV
B	I	18CX106	A
SCALE	3/4:1	SHEET	1 OF 1