




- For wire 0.5 to 6 mm
- Wire diameter presetting.
- Long stripping length.
- Integral wire-cutter.
- Hinge adjusting screw.
- 3 options
  - CPE Chrome finish, ergonomic grips, return spring;
  - TE Varnished finish, ergonomic grips, return spring;
  - VE Varnished finish, return spring, 1000V insulated grips for electrical safety to EN 60900 and , for working on or near live components.

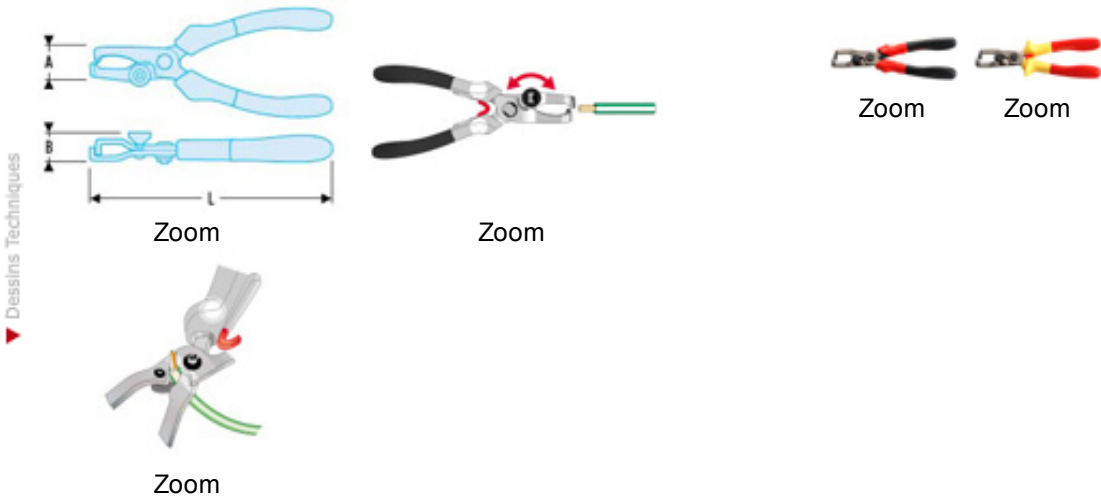

|  | <br>mm <sup>2</sup> | L<br>mm | A<br>mm | B<br>mm | <br>g |
|-------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------|---------|---------|---------|------------------------------------------------------------------------------------------|
| 194.17CPE                                                                           | 0,5 - 6                                                                                                | 195     | 17      | 16      | 160                                                                                      |
| 194.17TE                                                                            | 0,5 - 6                                                                                                | 195     | 17      | 16      | 160                                                                                      |
| 194.17VE                                                                            | 0,5 - 6                                                                                                | 195     | 17      | 16      | 165                                                                                      |