

VS-08-T-H-S-RJ45/IP67

Order No.: 1652855

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1652855>

RJ45 sleeve housing, IP67, irradiated for welding applications, for pin inserts VS-08-ST-H11-RJ45 and VS-08-ST-H21-RJ45, with push-pull interlocking for panel mounting frames, cable cross section 5.0 mm ... 8.5 mm

Ethernet


Product notes

WEEE/RoHS-compliant since:
01/01/2003



<http://www.download.phoenixcontact.com>
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

Commercial data

GTIN (EAN)	 4 017918 969875
Note	Made-to-order
sales group	D510
Pack	5 pcs.
Customs tariff	85472000
Catalog page information	Page 30 (PC-2005)

Technical data**Mechanical characteristics**

Insertion/withdrawal cycles	≥ 1000
External cable diameter	5 mm ... 8.5 mm
Cable exit	Straight

Color	black
Ambient temperature (operation)	-40 °C ... 80 °C

Material data


Inflammability class acc. to UL 94	HB
Housing material	PA
Material, O-ring	FPM
Cable seal material	NBR
Degree of protection	IP67

Accessories

Item	Designation	Description
General		
1652716	VS-08-ST-H11-RJ45	RJ45 pin insert, CAT5e, 8-pos., shielded, IDC connection method, for litz wires AWG 27 ... 26, with strain relief
1652729	VS-08-ST-H21-RJ45	RJ45 male insert, CAT6, 8-pos., shielded, IDC displacement connection, for litz wire AWG 25 ... 24 and solid wires AWG 24, with strain relief

Diagrams/Drawings

Dimensioned drawing

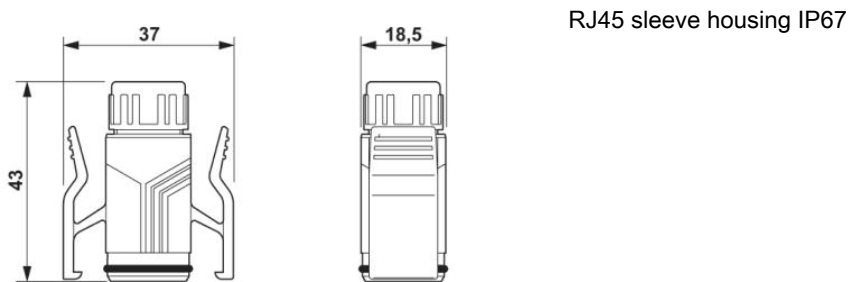

Address

PHOENIX CONTACT Inc., USA
586 Fulling Mill Road
Middletown, PA 17057, USA
Phone (800) 888-7388
Fax (717) 944-1625
<http://www.phoenixcon.com>



© 2011 Phoenix Contact
Technical modifications reserved;