

**PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION**

**Part Number:** [1700714011](#)  
**Status:** **Active**  
**Overview:** High-Speed Pluggable I/O Solutions  
**Description:** zSFP+ Stacked Ganged Assembly with Elastomeric Gasket, 2-by-4 with 4 Light Pipes, 160 Circuits

**Documents:**

<a href="#">3D Model</a>	<a href="#">Application Specification AS-170071-0002-001 (PDF)</a>
<a href="#">3D Model (PDF)</a>	<a href="#">Test Summary TS-170071-0001-001 (PDF)</a>
<a href="#">Drawing (PDF)</a>	<a href="#">RoHS Certificate of Compliance (PDF)</a>
<a href="#">Product Specification PS-170071-0001 (PDF)</a>	

**Agency Certification**

UL E29179


**General**

Product Family	I/O Connectors
Series	<a href="#">170071</a>
Application	Module-to-Board
Component Type	Receptacle
Electrical Model	Yes
Overview	<a href="#">High-Speed Pluggable I/O Solutions</a>
Product Name	zSFP Plus, zSFP+
Type	N/A
UPC	884982402195

**Physical**

Circuits (Loaded)	160
Color - Resin	Black
Durability (mating cycles max)	100
Flammability	94V-0
Gender	Female
Lock to Mating Part	Yes
Material - Metal	High Performance Alloy (HPA)
Material - Plating Mating	Gold
Material - Plating Termination	Matte Tin
Material - Resin	High Temperature Thermoplastic
Net Weight	98.604/g
Number of Rows	2
Orientation	Right Angle
PCB Locator	Yes
PCB Retention	Yes
PCB Thickness - Recommended	2.36mm
Packaging Type	Tray
Panel Mount	No
Pitch - Mating Interface	0.80mm
Pitch - Termination Interface	0.80mm
Plating min - Mating	0.762µm
Plating min - Termination	0.762µm
Polarized to Mating Part	Yes
Polarized to PCB	Yes
Ports	8
Surface Mount Compatible (SMC)	No
Temperature Range - Operating	-40° to +85°C
Termination Interface: Style	Through Hole - Compliant Pin

**Electrical**

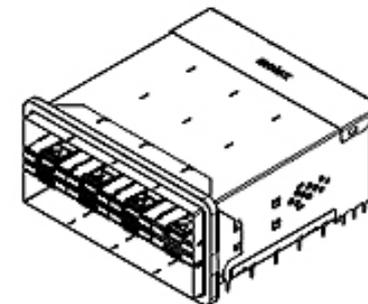

Series image - Reference only

**EU ELV**

**Not Relevant**

**EU RoHS**

**Compliant**

**REACH SVHC**

Not Contained Per - ED/71/2019 (16 July 2019)

**Halogen-Free**

**Status**

**Not Low-Halogen**

For more information, please visit [Contact US](#)

China ROHS

ELV

RoHS Phthalates

**China RoHS**

Green Image

Not Relevant

Not Contained

**Search Parts in this Series**

[170071 Series](#)

**Application Tooling | FAQ**

*Tooling specifications and manuals are found by selecting the products below. Crimp Height Specifications are then contained in the Application Tooling Specification document.*

**Global**

Description	Product #
Stacked Multi-Port Extraction Tool, 2-by-4	<a href="#">622029940</a>
2-by-4 SFP Stacked Multi-Port Insertion Tool	<a href="#">622030150</a>

Current - Maximum per Contact	0.5A
Shield Type	N/A
Shielded	Yes
Voltage - Maximum	30V AC

**Solder Process Data**

Lead-freeProcess Capability	N/A
-----------------------------	-----

**Material Info****Reference - Drawing Numbers**

Application Specification	AS-170071-0002-001
Electrical Model Document	EE-170071-0001
Product Specification	PS-170071-0001
S-Parameter Model	SP-170426-1000
Sales Drawing	1700710002-000
Symbol/Footprint Data	SYM-170071-0001
Test Summary	TS-170071-0001-001

This document was generated on 02/19/2020

**PLEASE CHECK [WWW.MOLEX.COM](http://WWW.MOLEX.COM) FOR LATEST PART INFORMATION**