


ZEC 1,5/ 3-LPV-7,5 C2

Order No.: 1898389

The figure shows a 10-position version of the product

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1898389>

Printed circuit board connector, Nominal current: 10 A, Rated voltage (III/2): 630 V, Number of positions: 3, Pitch: 7.5 mm, Color: Green, Assembly: PCB connector

Commercial data	
GTIN (EAN)	 4 017918 167097
sales group	E116
Pack	50 pcs.
Customs tariff	85366990
Catalog page information	Page 339 (CC-2011)

Product notesWEEE/RoHS-compliant since:
01/01/2003

<http://www.download.phoenixcontact.com>
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

Technical data	
Dimensions / positions	
Pitch	7.5 mm
Dimension a	22.5 mm
Number of positions	3

Technical data

Range of articles	ZEC 1,5/..-LPV
Insulating material group	I
Rated surge voltage (III/3)	6 kV
Rated surge voltage (III/2)	6 kV
Rated surge voltage (II/2)	6 kV
Rated voltage (III/2)	630 V
Rated voltage (II/2)	1000 V
Connection in acc. with standard	EN-VDE
Nominal current I_N	10 A
Nominal voltage U_N	400 V
Nominal cross section	1.5 mm ²
Maximum load current	10 A
Insulating material	PA
Inflammability class acc. to UL 94	V0

Certificates / Approvals




Certification

CB, CUL, UL, VDE-PZI


Diagrams/Drawings

Drilling plan/solder pad geometry

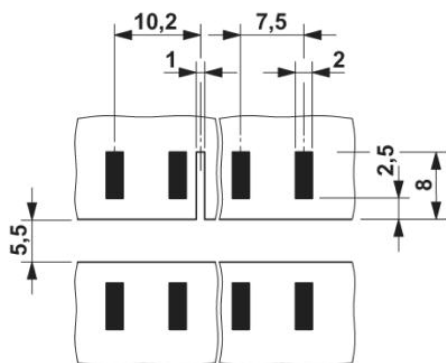

Size of the PCB: 1.6 ± 0.2 mm

Dimensioned drawing

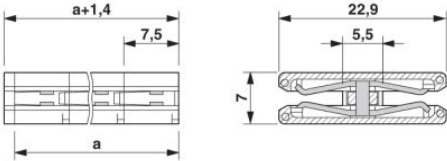

Address

PHOENIX CONTACT Inc., USA
586 Fulling Mill Road
Middletown, PA 17057, USA
Phone (800) 888-7388
Fax (717) 944-1625
<http://www.phoenixcon.com>



© 2011 Phoenix Contact
Technical modifications reserved;