



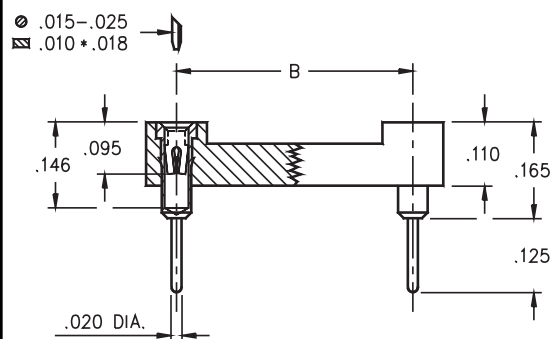

- All DIP sockets accept .015" - .025" diameter & standard IC leads.
- Hi-Rel, 4-finger BeCu #30 contact is rated at 3 amps. See page 208 for details.
- Series 110 sockets use MM #1001 pins. See page 134 for details.
- Insulators are high temp. thermoplastic.

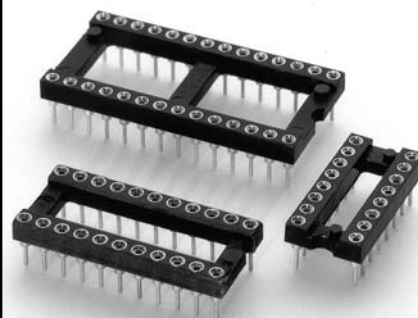

| Total number of pins |     |     |     | Quantity per tube | Ordering Information                  |  |                                                       |
|----------------------|-----|-----|-----|-------------------|---------------------------------------|--|-------------------------------------------------------|
|                      | A   | B   | C   |                   |                                       |  |                                                       |
| 10                   | 0.5 | 0.2 | 0.3 | 40                | 110-XX-210-41-001000                  |  |                                                       |
| 4                    | 0.2 | 0.3 | 0.4 | 102               | 110-XX-304-41-001000                  |  |                                                       |
| 6                    | 0.3 | 0.3 | 0.4 | 67                | 110-XX-306-41-001000                  |  |                                                       |
| 8                    | 0.4 | 0.3 | 0.4 | 50                | 110-XX-308-41-001000                  |  |                                                       |
| 10                   | 0.5 | 0.3 | 0.4 | 40                | 110-XX-310-41-001000                  |  |                                                       |
| 14                   | 0.7 | 0.3 | 0.4 | 28                | 110-XX-314-41-001000                  |  |                                                       |
| 16                   | 0.8 | 0.3 | 0.4 | 25                | 110-XX-316-41-001000                  |  |                                                       |
| 18                   | 0.9 | 0.3 | 0.4 | 22                | 110-XX-318-41-001000                  |  |                                                       |
| 20                   | 1.0 | 0.3 | 0.4 | 20                | 110-XX-320-41-001000                  |  |                                                       |
| 22                   | 1.1 | 0.3 | 0.4 | 18                | 110-XX-322-41-001000                  |  |                                                       |
| 24                   | 1.2 | 0.3 | 0.4 | 16                | 110-XX-324-41-001000                  |  |                                                       |
| 28                   | 1.4 | 0.3 | 0.4 | 14                | 110-XX-328-41-001000                  |  |                                                       |
| 20                   | 1.0 | 0.4 | 0.5 | 20                | 110-XX-420-41-001000                  |  |                                                       |
| 22                   | 1.1 | 0.4 | 0.5 | 18                | 110-XX-422-41-001000                  |  |                                                       |
| 24                   | 1.2 | 0.4 | 0.5 | 16                | 110-XX-424-41-001000                  |  |                                                       |
| 28                   | 1.4 | 0.4 | 0.5 | 14                | 110-XX-428-41-001000                  |  |                                                       |
| 32                   | 1.6 | 0.4 | 0.5 | 12                | 110-XX-432-41-001000                  |  |                                                       |
| 24                   | 1.2 | 0.6 | 0.7 | 16                | 110-XX-624-41-001000                  |  |                                                       |
| 28                   | 1.4 | 0.6 | 0.7 | 14                | 110-XX-628-41-001000                  |  |                                                       |
| 32                   | 1.6 | 0.6 | 0.7 | 12                | 110-XX-632-41-001000                  |  |                                                       |
| 36                   | 1.8 | 0.6 | 0.7 | 11                | 110-XX-636-41-001000                  |  |                                                       |
| 40                   | 2.0 | 0.6 | 0.7 | 10                | 110-XX-640-41-001000                  |  |                                                       |
| 42                   | 2.1 | 0.6 | 0.7 | 9                 | 110-XX-642-41-001000                  |  |                                                       |
| 48                   | 2.4 | 0.6 | 0.7 | 8                 | 110-XX-648-41-001000                  |  |                                                       |
| 50                   | 2.5 | 0.6 | 0.7 | 8                 | 110-XX-650-41-001000                  |  |                                                       |
| 52                   | 2.6 | 0.6 | 0.7 | 7                 | 110-XX-652-41-001000                  |  |                                                       |
| 50                   | 2.5 | 0.9 | 1.0 | 8                 | 110-XX-950-41-001000                  |  |                                                       |
| 52                   | 2.6 | 0.9 | 1.0 | 7                 | 110-XX-952-41-001000                  |  |                                                       |
| 64                   | 3.2 | 0.9 | 1.0 | 6                 | 110-XX-964-41-001000                  |  |                                                       |
|                      |     |     |     |                   | <div>XX= Plating Code See Below</div> |  | <div>For RoHS compliance select ◇ plating code.</div> |

| SPECIFY PLATING CODE XX= | 13 ◇    | 91          | 93          | 99          | 41 ◇     | 43 ◇     | 44 ◇     |
|--------------------------|---------|-------------|-------------|-------------|----------|----------|----------|
| Sleeve (Pin)             | 10μ" Au | 200μ" Sn/Pb | 200μ" Sn/Pb | 200μ" Sn/Pb | 200μ" Sn | 200μ" Sn | 200μ" Sn |
| Contact (Clip)           | 30μ" Au | 10μ" Au     | 30μ" Au     | 200μ" Sn/Pb | 10μ" Au  | 30μ" Au  | 200μ" Sn |