


LOC	DIST	REVISIONS					
—	—	P	LTR	DESCRIPTION	DATE	DWN	APVD
		E		CONTACT PIN MATERIAL & PLATING CHANGE	27JUN2014	PS	JK

POLZ. PRO REIHE	L±0.4	BESTELL-NR.	
—	—	—	—
2	5.08	—	2/3
3	7.62	—	3/3
4	10.16	—	4/2
5	12.70	—	5/2
6	15.24	—	6/2
7	17.78	829 315	7/2
8	20.32	—	—8
9	22.86	—	9/2
10	25.40	1-	-0
11	27.94	1-	-1
12	30.48	-1	2/2
13	33.02	1-	-3
14	35.56	-1	4/2
15	38.10	-1	5/2
16	40.64	-1	6/3
17	43.18	1-	-7
18	45.72	-1	8/2
19	48.26	-1	9/2
20	50.80	2-	-0
21	53.34	-2	1/2
22	55.88	-2	2/2
23	58.42	-2	3/2
24	60.96	-2	4/2
25	63.50	-2	5/2
26	66.04	-2	6/2
27	68.58	-2	7/2
28	71.12	-2	8/2
29	73.66	-2	9/2
30	76.20	-3	0/2
31	78.74	-3	1/2
32	81.28	-3	2/2
33	83.82	3-	-3
34	86.36	-3	4/2
35	88.90	-3	5/2
36	91.44	-3	6/2
37	93.98	-3	7/2
38	96.52	-3	8/2
39	99.06	-3	9/2
40	101.60	-4	0/2
41	104.14	-4	1/2
42	106.68	-4	2/2
43	109.22	-4	3/2
44	111.76	-4	4/2
45	114.30	-4	5/2
46	116.84	-4	6/2
47	119.38	-4	7/2
48	121.92	-4	8/2
49	124.46	-4	-9
50	127.00	-5	829 315 0/3

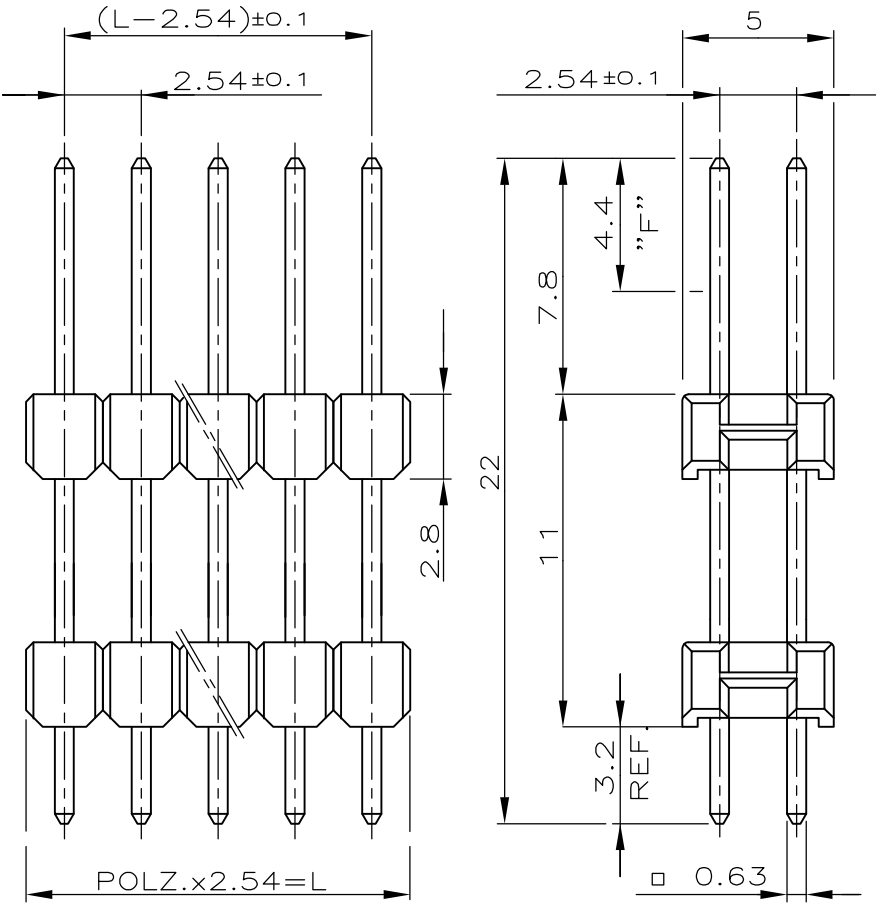

- 1 MATING SIDE: MIN 0.7µm PdNi+ MIN 0.1µm GOLD FLASH IN ZONE "F" OVER 1.27µm NICKEL
SOLDER SIDE: 3.0 TO 5.0µm TIN OVER 1.27µm NICKEL.
- 2 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI
- 3 OBSOLETE

KONTAKTSTIFT	CuZn	1
STIFTGEHÄUSE	PBT	GRÜN
BENENNUNG	WERKSTOFF	OBERFLÄCHE FARBE

THIS DRAWING IS UNPUBLISHED. ALL RIGHTS RESERVED.

DIMENSIONS: mm	DWN	28.09.88	MATERIAL	FINISH
	CHK	A.HO		
TOLERANCES UNLESS OTHERWISE SPECIFIED:	APVD	M.Schaarschmidt	TE Connectivity	
	PRODUCT SPEC			
0 PLC ±0.2 mm	NAME	108-18012	SPEZ. AMPMODU II STIFTLISTE	
1 PLC ± -	APPLICATION SPEC		ZWEIREIHIG	
2 PLC ± -	WEIGHT		SIZE	CAGE CODE
3 PLC ± -			A4	00779
4 PLC ± -			DRAWING NO	
ANGLES ± -			C-829315	
			RESTRICTED TO	
			SCALE	SHEET
			4:1	1 OF 1
				REV
				E

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[1-829315-0](#)