

11 Series


RoHS
Compliant

NYLON 6.6

GENERAL PURPOSE

APPLICATION OPERATING TEMPERATURE: -40°C to +85°C

APPROVALS¹: 

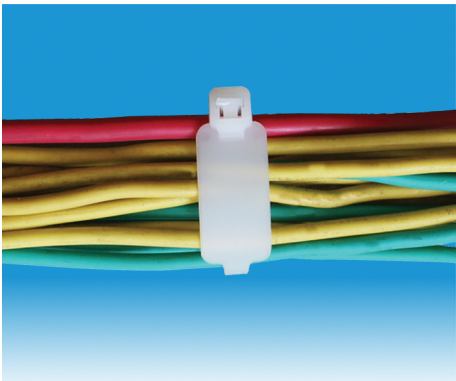


Part Number	Width mm [Inch]	Length mm [Inch]	Max Bundle Diameter mm [Inch]	Min Loop Tensile Kg [lb]	Write Area mm [Inch]
M - 18lb TYPE A					
11-M100	2.5 [.098]	100 [4.0]	22.0 [0.86]	8 [18]	7.75x24.5 [0.30x0.95]
11-M200	2.5 [.098]	200 [8.0]	53.9 [2.12]	8 [18]	7.75x24.5 [0.30x0.95]
M - 18lb TYPE C					
11-M110	2.5 [.098]	110 [4.3]	22.6 [0.89]	8 [18]	9.0x20 [0.35x0.78]
S - 50lb TYPE B					
11-S190	4.8 [.189]	190 [7.0]	50.9 [2.00]	22 [50]	12.9x27 [0.50x1.05]

Notes:
1. 11-M110 and 11-M200 are not UL approved

TYPE A

TYPE B

TYPE C

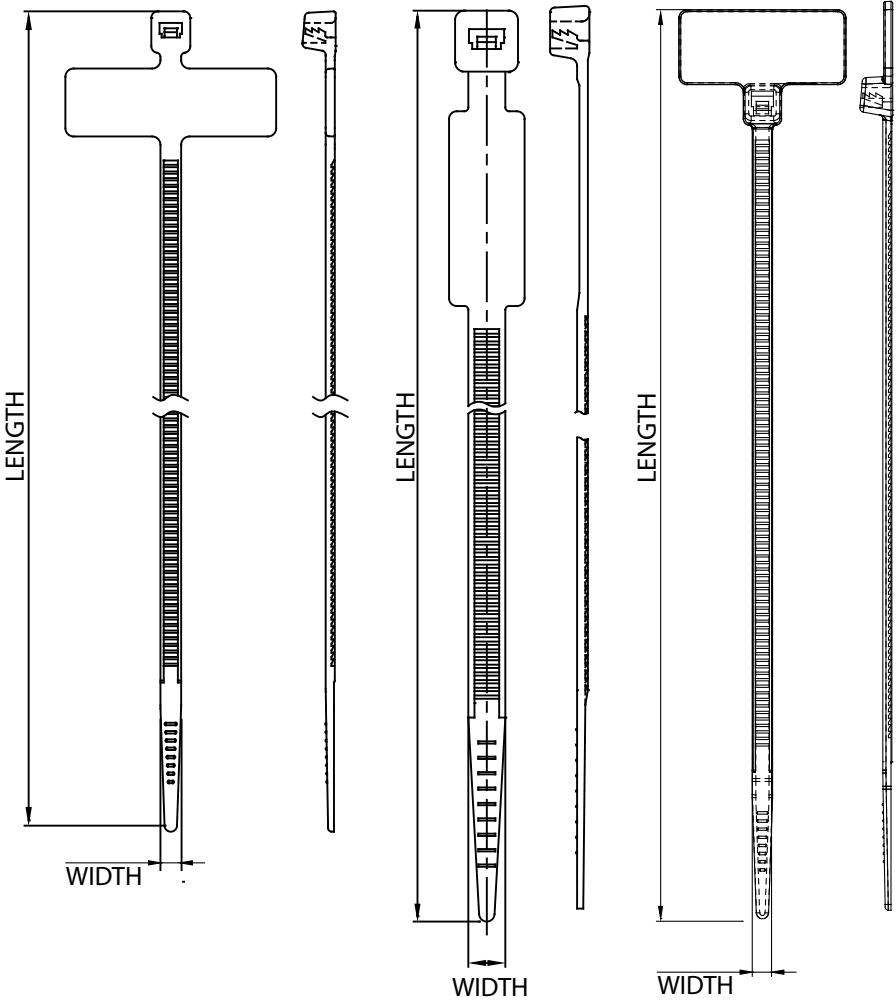

PART NUMBER SYSTEM

11 - M 200 B - C

SERIES
CROSS SECTION
LENGTH
MATERIAL/COLOR

N: Natural
B: Normal UV Black

PACKAGE SIZE

C: 100PCS
Number: Other Quantity

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Qualtek:](#)

[11-S190B-C](#) [11-S190N-C](#) [11-M100N-C](#) [11-M100B-C](#) [11-M110N-C](#) [11-M110B-C](#) [11-M200N-C](#) [11-M200B-C](#)