


- Combines one through three level wrapost with pluggable solder tails.
- Suitable for use as an interconnect socket with intermediate wire wrapped connections.
- Hi-Rel, 4-finger BeCu #30 contact is rated at 3 amps. See page 218 for details.
- Series 126 use MM #2601, #2602 & #2603 pins. See page 167 for details.
- Insulators are high temperature thermoplastic.

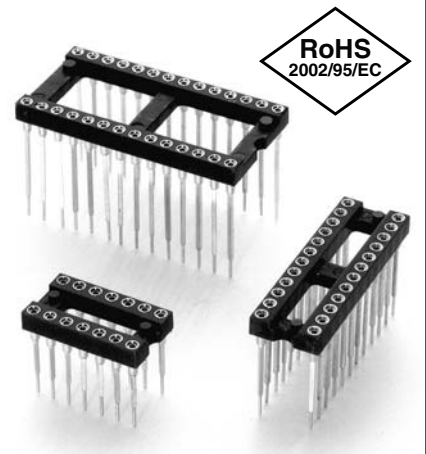

RoHS
2002/95/EC

Total number of pins				Quantity per tube	Ordering Information		
	A	B	C		<i>For Electrical, Mechanical & Environmental Data, See pg. 4</i>		
					L = 10,8 (1 level = 5,89)	L = 13,79 (2 level = 8,89)	L = 16,79 (3 level = 11,9)
10	12,6	5,08	7,6	40	126-XX-210-41-001000	126-XX-210-41-002000	126-XX-210-41-003000
4	5,0	7,62	10,1	102	126-XX-304-41-001000	126-XX-304-41-002000	126-XX-304-41-003000
6	7,6	7,62	10,1	67	126-XX-306-41-001000	126-XX-306-41-002000	126-XX-306-41-003000
8	10,1	7,62	10,1	50	126-XX-308-41-001000	126-XX-308-41-002000	126-XX-308-41-003000
10	12,6	7,62	10,1	40	126-XX-310-41-001000	126-XX-310-41-002000	126-XX-310-41-003000
14	17,7	7,62	10,1	28	126-XX-314-41-001000	126-XX-314-41-002000	126-XX-314-41-003000
16	20,3	7,62	10,1	25	126-XX-316-41-001000	126-XX-316-41-002000	126-XX-316-41-003000
18	22,8	7,62	10,1	22	126-XX-318-41-001000	126-XX-318-41-002000	126-XX-318-41-003000
20	25,3	7,62	10,1	20	126-XX-320-41-001000	126-XX-320-41-002000	126-XX-320-41-003000
22	27,8	7,62	10,1	18	126-XX-322-41-001000	126-XX-322-41-002000	126-XX-322-41-003000
24	30,4	7,62	10,1	16	126-XX-324-41-001000	126-XX-324-41-002000	126-XX-324-41-003000
28	35,5	7,62	10,1	14	126-XX-328-41-001000	126-XX-328-41-002000	126-XX-328-41-003000
20	25,4	10,16	12,7	20	126-XX-420-41-001000	126-XX-420-41-002000	126-XX-420-41-003000
22	27,8	10,16	12,7	18	126-XX-422-41-001000	126-XX-422-41-002000	126-XX-422-41-003000
24	30,4	10,16	12,7	16	126-XX-424-41-001000	126-XX-424-41-002000	126-XX-424-41-003000
28	35,5	10,16	12,7	14	126-XX-428-41-001000	126-XX-428-41-002000	126-XX-428-41-003000
32	40,6	10,16	12,7	12	126-XX-432-41-001000	126-XX-432-41-002000	126-XX-432-41-003000
24	30,4	15,24	17,7	16	126-XX-624-41-001000	126-XX-624-41-002000	126-XX-624-41-003000
28	35,5	15,24	17,7	14	126-XX-628-41-001000	126-XX-628-41-002000	126-XX-628-41-003000
32	40,6	15,24	17,7	12	126-XX-632-41-001000	126-XX-632-41-002000	126-XX-632-41-003000
36	45,7	15,24	17,7	11	126-XX-636-41-001000	126-XX-636-41-002000	126-XX-636-41-003000
40	50,8	15,24	17,7	10	126-XX-640-41-001000	126-XX-640-41-002000	126-XX-640-41-003000
42	53,3	15,24	17,7	9	126-XX-642-41-001000	126-XX-642-41-002000	126-XX-642-41-003000
48	60,9	15,24	17,7	8	126-XX-648-41-001000	126-XX-648-41-002000	126-XX-648-41-003000
50	63,5	15,24	17,7	8	126-XX-650-41-001000	126-XX-650-41-002000	126-XX-650-41-003000
52	66,0	15,24	17,7	7	126-XX-652-41-001000	126-XX-652-41-002000	126-XX-652-41-003000
50	63,5	22,86	25,3	8	126-XX-950-41-001000	126-XX-950-41-002000	126-XX-950-41-003000
52	66,0	22,86	25,3	7	126-XX-952-41-001000	126-XX-952-41-002000	126-XX-952-41-003000
64	81,2	22,86	25,3	6	126-XX-964-41-001000	126-XX-964-41-002000	126-XX-964-41-003000
SPECIFY PLATING CODE XX=					93	43◇	
Sleeve (Pin)					5,08µm Sn/Pb	5,08µm Sn	<div style="border: 1px solid green; padding: 5px; display: inline-block;"> For RoHS compliance select ◇ plating code. </div>
Contact (Clip)					0,76µm Au	0,76µm Au	