
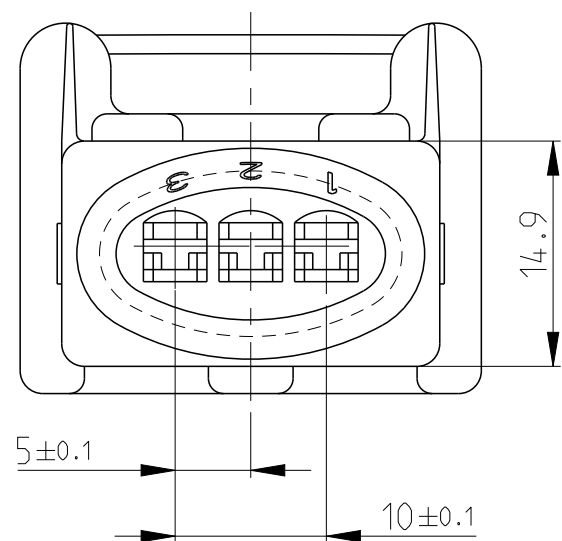
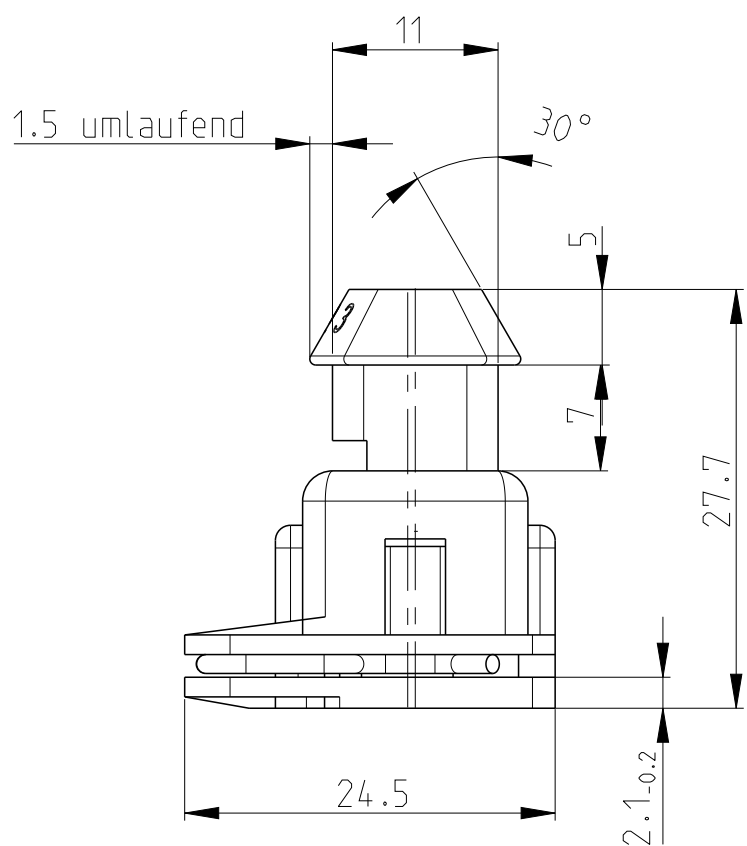
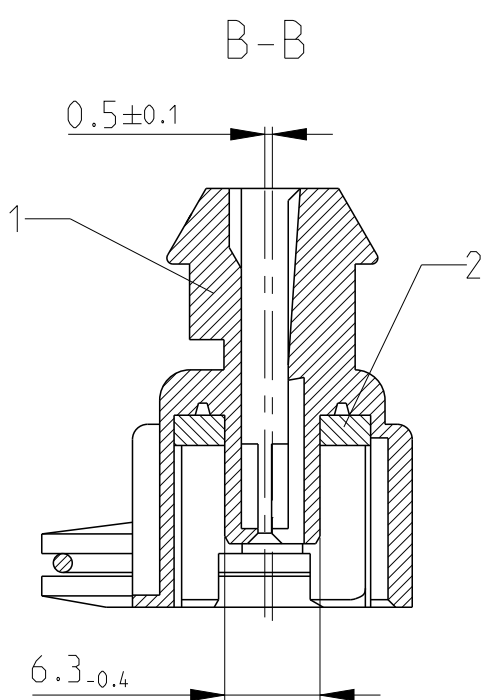


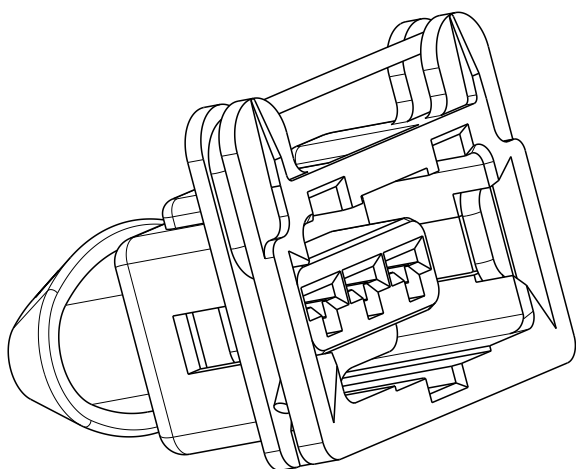

K1	1 x	1 x	1 x	1 x	1 x	1 x	3	Feder	Draht Ø 1.25 A DIN 2076 X12CrNi177 K+A	blank
	1 x	1 x	1 x	1 x	1 x	1 x	2	Dichtung	NEOPRENE (CR) Shore A 45±5 °	schwarz
	1 x						1	3 pol. Gehaeuse	PA 6.6 GFV30	gruen
		1 x					1	3 pol. Gehaeuse	PA 6.6 GFV30	weiß
			1 x		1 x		1	3 pol. Gehaeuse	PA 6.6 GFV30	grau
				1 x		1 x	1	3 pol. Gehaeuse	PA 6.6 GFV30	schwarz
	1-827578-4	1-827578-3	1-827578-2	1-827578-1	827578-2	827578-1	Lfd. Nr.	Benennung	Werkstoff	Oberflaeche Farbe

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN H. John		10MAY84		 TE Connectivity	
DIESES ZEICHNUNGSDOKUMENT WIRD DURCH AM INCORPORATED KONTROLLIERT. ANÄNDERUNGEN, DIE DEN TECHNISCHEN FORTSCHRITT DIENTEN, SIND VORBEHALTEN. DEN JEWEILS LETZTLIEGENDEN ANÄNDERUNGSSTAND ERFAHREN SIE AUF ANFRAGE.		CHK -		-			
DIMENSIONS: MASSENEHREITEN: (mm)		TOLERANCES UNLESS OTHERWISE SPECIFIED: ALLGEMEINTOLERANZEN		NAME		ASSY OF 3pos. HSG FOR JUNIOR-TIMER CONTACT -	
		0 PLC ±-		PRODUCT SPEC			
		1 PLC ±-		PRODUKTSPEZ.			
		2 PLC ±0.2		-			
		4 PLC ±-		APPLICATION SPEC			
		ANGLES/WINKEL ±1.5°		VERARBEITUNGSSPEZ.			
		-		-			
MATERIAL		FINISH/OBERFLÄCHE/FARBE		WEIGHT GEWICHT		RESTRICTED TO NUR FÜR	
SEE TABLE		-		-		-	
-		-		-		-	
				A2 00779		DRAWING NO ZEICHNUNGS-NR. C=827578	
				Customer Drawing		KUNDENZEICHNUNG	
				SCALE MASSSTAB		2:1	
				SHEET BLATT		1 OF 1	
				REV		K1	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[1-827578-2](#)