



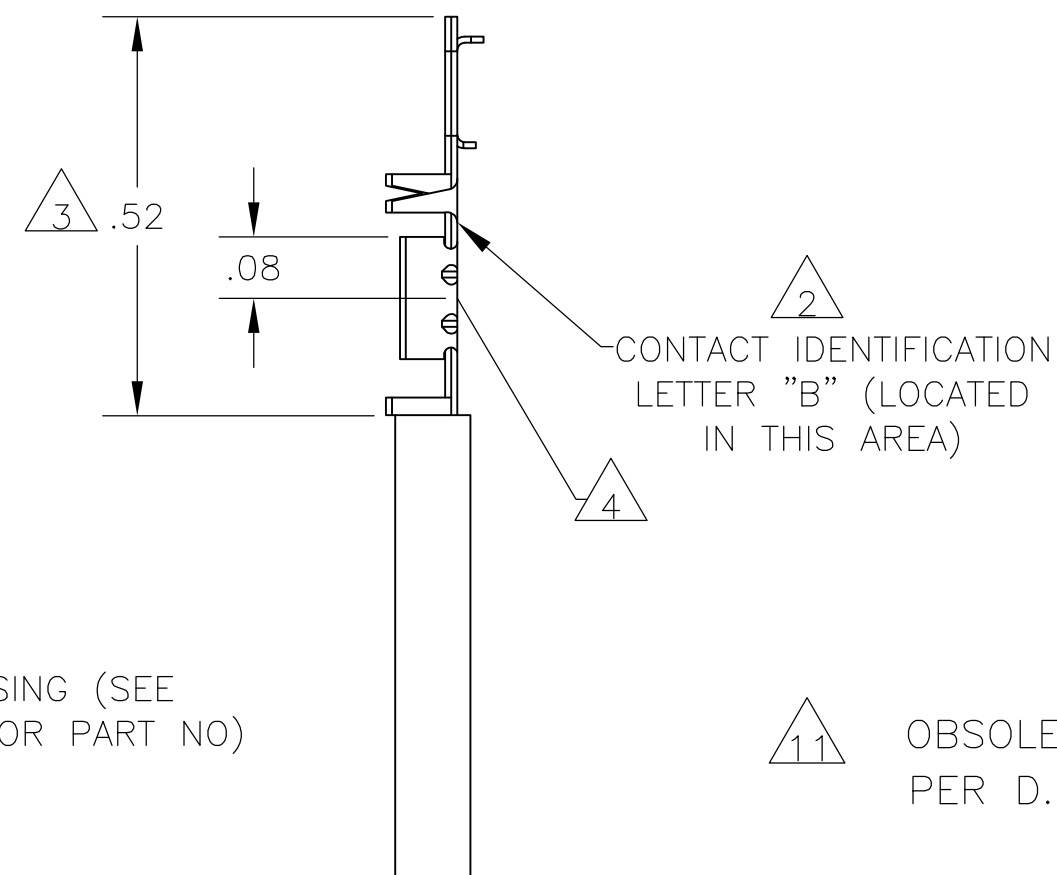


11 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING
PER D.RENAUD/D.SINISI

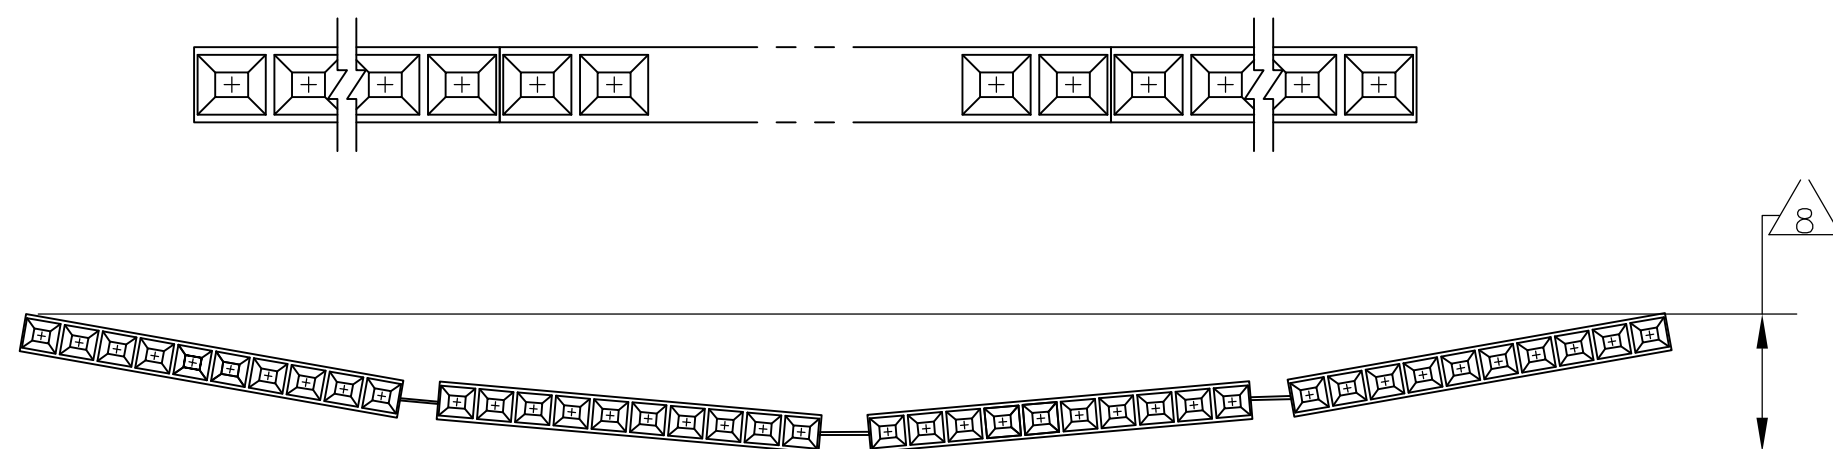

EXAMPLE: STRIP ASSEMBLY
SCALE 2:1

- 1 CONTACTS ARE LATCHED INTO THE PRELOAD WINDOWS
- 2 USE WITH #22-#26 AWG WIRE SIZE, .054/.030 INSULATION DIAMETER, .015 MAXIMUM INSULATION THICKNESS
- 3 THE DIMENSION APPLIES WITH THE FORWARD PRELOAD STOP IN CONTACT WITH THE HOUSING SURFACE
- 4 POINT OF MEASUREMENT FOR PLATING THICKNESS
- 5 FOR INDIVIDUAL ASSEMBLIES SEE PART NUMBER 103687
- 6 ASSEMBLIES ARE JOINED BY THE CARRIER STRIP.
ORDER QUANTITY REFLECTS TOTAL NUMBER OF
INDIVIDUAL ASSEMBLIES REQUIRED. SEE TABLE
FOR NUMBER OF ASSEMBLIES PER STRIP.
- 7 POINT OF MEASUREMENT FOR PLATING THICKNESS (INSIDE BEAMS)
- 8 MAXIMUM ALLOWABLE BOW OF ASSEMBLY NOT TO EXCEED .055.
- 9 CONTACTS: .000100-.000200 BRIGHT TIN-LEAD
OVER .000050 NICKEL.
- 10 CONTACTS: .000100-.000200 MATTE TIN
OVER .000050 NICKEL.

 OBSOLETE		2	2.40	1.198	1-103688-1	12	6-103974-1
 OBSOLETE		2	2.20	1.098	1-103688-0	1 1	6-103974-0
 OBSOLETE		2	2.00	.998	103688-9	10	5-103974-9
 OBSOLETE		2	1.80	.898	103688-8	9	5-103974-8
		2	1.60	.798	103688-7	8	5-103974-7
		2	1.40	.698	103688-6	7	5-103974-6
		4	2.39	.598	103688-5	6	5-103974-5
		4	1.99	.498	103688-4	5	5-103974-4
		5	1.99	.398	103688-3	4	5-103974-3
		8	2.40	.298	103688-2	3	5-103974-2
		10	2.00	.198	103688-1	2	5-103974-1
		2	2.40	1.198	1-103688-1	12	1-103974-1
 OBSOLETE		2	2.20	1.098	1-103688-0	1 1	1-103974-0
 OBSOLETE		2	2.00	.998	103688-9	10	103974-9
		2	1.80	.898	103688-8	9	103974-8
		2	1.60	.798	103688-7	8	103974-7
		2	1.40	.698	103688-6	7	103974-6
		4	2.39	.598	103688-5	6	103974-5
		4	1.99	.498	103688-4	5	103974-4
		5	1.99	.398	103688-3	4	103974-3
		8	2.40	.298	103688-2	3	103974-2
		10	2.00	.198	103688-1	2	103974-1
	PLATING		B	A	HOUSING PART NUMBER	NO OF POSN	ASSEMBLY PART NUMBER ON STRIP

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN L. MAYER	05 NOV 1986				TE Connectivity			
DIMENSIONS: INCHES		CHK P.C.DEJONG	11-12-86		NAME RCPT ASSY, AMPMODU MTE, SINGLE ROW, .100 CL, FOR NO 22-NO 26 AWG WIRE SIZE, STRIP FORM					
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD P.C.DEJONG	11-13-86							
		PRODUCT SPEC		SIZE			CAGE CODE	DRAWING NO	RESTRICTED TO	
		APPLICATION SPEC		A2			00779	C-103974	-	
0 PLC ± - 1 PLC ± - 2 PLC ± .02 3 PLC ± .005 4 PLC ± - ANGLES ± -		108-25034		WEIGHT		-				
MATERIAL HOUSING: FLAME RETARDANT THERMOPLASTIC, COLOR:BLACK		FINISH		SEE TABLE		CUSTOMER DRAWING		SCALE 4:1	SHEET 1 OF 1	REV K2

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[103974-4](#)