


SAC-4P-MINMS FF-TR VA

Order No.: 1430023

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1430023>FOUNDATION Fieldbus termination resistor, 4-pos., 7/8"-UNF
connector**Commercial data**

GTIN (EAN)	
sales group	D151
Pack	1 pcs.
Customs tariff	85444290
Catalog page information	Page 407 (PC-2011)

Product notesWEEE/RoHS-compliant since:
09/21/2007

<http://www.download.phoenixcontact.com>
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

Technical data**General data**

Rated voltage	50 V
Number of positions	4
Volume resistance	≤ 5 mΩ


Insulation resistance	≥ 10 MΩ
Ambient temperature (operation)	-40 °C ... 80 °C (Male connector / female connector)

General characteristics

Surge voltage category	II
Pollution degree	2
Degree of protection	IP67
Contact material	CuZn
Contact surface material	AU
Contact carrier material	PA 66
Material of grip body	TPU
Material, knurls	High-grade steel
Status display	No


Diagrams/Drawings

Dimensioned drawing

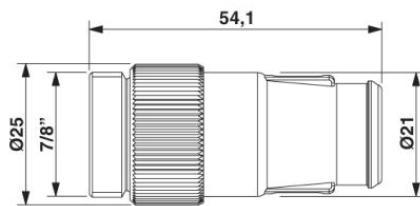


7/8" termination resistor

Circuit diagram

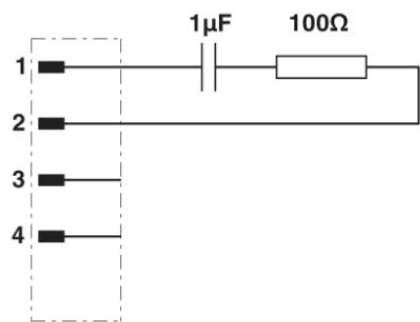

Contact assignment and wiring of the 7/8" termination resistor

Schematic diagram

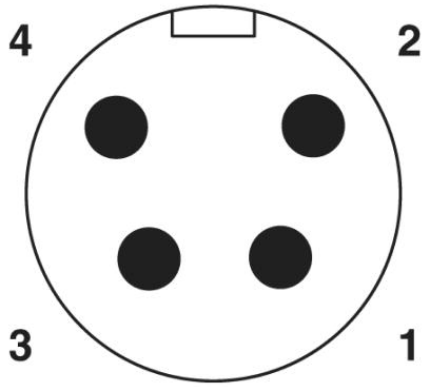

Pin assignment, plug, 7/8"-16UNF, 4-pos., view of male side

Address

PHOENIX CONTACT Inc., USA
586 Fulling Mill Road
Middletown, PA 17057, USA
Phone (800) 888-7388
Fax (717) 944-1625
<http://www.phoenixcon.com>



© 2011 Phoenix Contact
Technical modifications reserved;