

ACT20M
ACT20M-2CI-2CO-OLP-S**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 16

D-32758 Detmold

Germany

Fon: +49 5231 14-0

Fax: +49 5231 14-292083

www.weidmueller.com

**ACT20M: The slim solution**

- Safe and space-saving (6 mm) isolation and conversion
- Quick installation of the power supply unit using the CH20M mounting rail bus
- Easy configuration via DIP switch or FDT/DTM software
- Extensive approvals such as ATEX, IECEx, GL, DNV
- High interference resistance

General ordering data

Type	ACT20M-2CI-2CO-OLP-S
Order No.	1176050000
Version	Signal converter/insulator, Output current loop powered, 2-channel, Input : 4-20 mA, Output : 4-20 mA
GTIN (EAN)	4032248969999
Qty.	1 pc(s).

ACT20M

ACT20M-2CI-2CO-OLP-S

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 16
 D-32758 Detmold
 Germany
 Fon: +49 5231 14-0
 Fax: +49 5231 14-292083
 www.weidmueller.com

Technical data

Dimensions and weights

Width	6.1 mm	Width (inches)	0.24 inch
Height	112.5 mm	Height (inches)	4.429 inch
Depth	114.3 mm	Depth (inches)	4.5 inch
Net weight	96 g		

Temperatures

Humidity	40 °C / 93 % rel. humidity, no condensation	Operating temperature, max.	70 °C
Operating temperature, min.	-25 °C	Storage temperature, max.	85 °C
Storage temperature, min.	-40 °C	Operating temperature	-25 °C...70 °C
Ambient temperature	-25 °C...+70 °C	Storage temperature	-40 °C...85 °C

Input

Number of inputs	2	Sensor	2-wire transmitter (without own power supply)
Sensor supply	6...35 V (@ 20 mA)	Input current	4...20 mA
Voltage drop, current input	Typical 2.5 V		

Output

Number of outputs	2	Output current	4...20 mA
Cut-off frequency (-3 dB)	100 Hz	load impedance current	≤ 600 Ω (channel 1 + 2), @ max 23mA
Supply voltage	6...35 V		

General data

Accuracy	< 0.05 % of measuring range	Configuration	none
Galvanic isolation	2-way isolator	Mounting rail	TS 35
Power consumption, max.	50 mW per channel	Step response time	≤ 5 ms
Supply voltage		Temperature coefficient	≤ ± 0.07 µA x (Δ °C x V supply) @ Tamb < 25 °C , ≤ ± 0.02 µA x (Δ °C x V supply) @ Tamb > 25 °C
	Output loop powered		

Insulation coordination

EMC standards	IEC 61326-1, NE 21	Galvanic isolation	2-way isolator
Insulation voltage	2.5 kV _{eff} / 1 min.	Pollution severity	2
Rated voltage	300 V _{eff}	Standards	IEC 61010-1
Surge voltage category	II		

Data for Ex applications (ATEX)

Marking	II 3 G Ex nA IIC T4 Gc
---------	------------------------

ACT20M
ACT20M-2CI-2CO-OLP-S**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 16

D-32758 Detmold

Germany

Fon: +49 5231 14-0

Fax: +49 5231 14-292083

www.weidmueller.com

Technical data**Connection data**

Type of connection	Screw connection	Tightening torque, min.	0.4 Nm
Tightening torque, max.	0.6 Nm	Clamping range, rated connection	2.5 mm ²
Clamping range, min.	0.5 mm ²	Clamping range, max.	2.5 mm ²
Wire connection cross section AWG, min.	AWG 30	Wire connection cross section AWG, max.	AWG 14

Rated data UL

UL certificate	E337701.pdf
----------------	-------------

Ratings IECEx/ATEX/cUL

Certificate No. (ATEX)	KEMA10ATEX0183X	Certificate No. (IECEX)	IECEXKEM10.0090X
------------------------	-----------------	-------------------------	------------------

Classifications

ETIM 3.0	EC002479	ETIM 4.0	EC002653
ETIM 5.0	EC002653	ETIM 6.0	EC002653
eClass 6.2	27-21-01-20	eClass 7.1	27-21-01-20
eClass 8.1	27-21-01-20	eClass 9.0	27-21-01-20
eClass 9.1	27-21-01-20		

Product information

Product information	The passive isolator ACT20M-CI-CO-OLP-S isolates standard analogue current signals. An analogue input current signal is linearly converted into an analogue output current signal and galvanically isolated. Power is supplied through the output measurement circuit (output loop-powered). The passive isolator ACT20M-2CI-2CO-OLP-S offers the same functionality, but has two galvanically isolated channels..
---------------------	---

Descriptive text technical data	Power supply optionally over the DIN mounting rail CH20M
---------------------------------	--

Descriptive text accessories	DIN mounting rail, see Accessories
------------------------------	------------------------------------

Approvals

Approvals



ROHS	Conform
------	---------

Downloads

Approval/Certificate/Document of Conformity	Declaration of Conformity
Brochure/Catalogue	CAT 4.1 ELECTR 16/17 EN
Engineering Data	EPLAN, WSCAD, Zuken E3.S
Engineering Data	STEP
User Documentation	Instruction sheet

Creation date April 8, 2018 10:58:48 PM CEST




Catalogue status 03.04.2018 / We reserve the right to make technical changes.

ACT20M ACT20M-2CI-2CO-OLP-S

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 16
D-32758 Detmold
Germany
Fon: +49 5231 14-0
Fax: +49 5231 14-292083
www.weidmueller.com

Drawings

Electric symbol

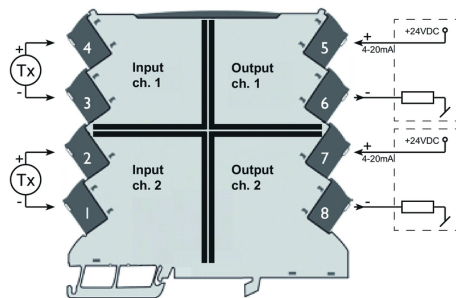

ACT20M
ACT20M-2CI-2CO-OLP-S

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 16
D-32758 Detmold
Germany
Fon: +49 5231 14-0
Fax: +49 5231 14-292083
www.weidmueller.com

Accessories**Accessories for ACT20M****ACT20M: The slim solution**

- Safe and space-saving (6 mm) isolation and conversion
- Quick installation of the power supply unit using the CH20M mounting rail bus
- Easy configuration via DIP switch or FDT/DTM software
- Extensive approvals such as ATEX, IECEX, GL, DNV
- High interference resistance

General ordering data

Type	Order No.	Version	GTIN (EAN)	Qty.
MF 5/7.5 MC	1877680000	MultiFit, Terminal marker, 5	4032248468270	320 pc(s).
NE WS		x 7.5 mm, Pitch in mm (P):		
		7.50 Adels RKW, Phoenix,		
		White		