

## Cable - SAC-3P-M12MS/1,5-PUR/A-1L-Z VW - 1439560

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Cable, 3-position, PUR halogen-free, Irradiated, orange RAL 2003, Plug straight M12, A-coded, on Valve connector A, with 1 LED, connected with Z diode, Cable length: 1.5 m, Customer-specific version



### Key Commercial Data

Packing unit	1 pc
Weight per Piece (excluding packing)	113.9 g
Custom tariff number	85444290
Country of origin	Poland

### Technical data

#### Dimensions

Length of cable	1.5 m
-----------------	-------

#### Ambient conditions

Ambient temperature (operation)	-25 °C ... 90 °C (Plug / socket)
	-20 °C ... 85 °C (valve plug)
Degree of protection	IP65
	IP67

#### General

Rated current at 40°C	4 A
Rated voltage	24 V
Number of positions	3
Insulation resistance	≥ 100 MΩ
Coding	A - standard
Status display	1 LED
Protective circuit/component	Z diode
Overvoltage category	III

# Cable - SAC-3P-M12MS/1,5-PUR/A-1L-Z VW - 1439560

## Technical data

### General

Degree of pollution	3
Insertion/withdrawal cycles	≥ 100

### Material

Flammability rating according to UL 94	HB
Contact material	CuSn
Contact surface material	Ni/Au
Contact carrier material	TPU GF
Material of grip body	TPU
Valve plug contact material	CuSn
Valve plug contact surface material	Sn
Valve plug contact insert material	PA 66
Material housing valve plug	TPU
Material, knurls	Zinc die-cast, nickel-plated
Sealing material	TPU (Seal molded)

### Standards and Regulations

Flammability rating according to UL 94	HB
--	----

### Cable

Cable type	PUR irradiated halogen-free orange
Cable type (abbreviation)	150
Cable abbreviation	Li12Y11X
Conductor cross section	3x 0.5 mm <sup>2</sup> (Signal line)
AWG signal line	20
Conductor structure signal line	28x 0.15 mm
Core diameter including insulation	1.46 mm ±0.02 mm (Signal line)
Thickness, insulation	≥ 0.21 mm (Core insulation)
	approx. 0.6 mm (Outer cable sheath)
Wire colors	black 1, black 2, green/yellow
Overall twist	3 wires, twisted
External sheath, color	orange RAL 2003
External cable diameter D	4.5 mm ±0.15 mm
Number of bending cycles	5000000
Bending radius	45 mm
Traversing path	10 m
Traversing rate	3 m/s
Cable weight	31 kg/km
Outer sheath, material	PUR

## Cable - SAC-3P-M12MS/1,5-PUR/A-1L-Z VW - 1439560

### Technical data

#### Cable

Material conductor insulation	TPE-E
Conductor material	Bare Cu litz wires
Insulation resistance	$\geq 100 \text{ M}\Omega \cdot \text{km}$ (at 20 °C)
Conductor resistance	max. 39 $\Omega/\text{km}$ (at 20 °C)
Nominal voltage, cable	$\leq 300 \text{ V}$
Test voltage, cable	$\geq 3000 \text{ V}$
Flame resistance	in accordance with DIN UL-Style 20549
Halogen-free	in accordance with DIN VDE 0472 part 815
Ambient temperature (operation)	-25 °C ... 80 °C (cable, fixed installation)
	-5 °C ... 80 °C (cable, flexible installation)

### Classifications

#### eCl@ss

eCl@ss 4.0	27060306
eCl@ss 4.1	27060306
eCl@ss 5.0	27061801
eCl@ss 5.1	27061801
eCl@ss 6.0	27061801
eCl@ss 7.0	27061801
eCl@ss 8.0	27279218
eCl@ss 9.0	27060311

#### ETIM

ETIM 3.0	EC001855
ETIM 4.0	EC001855
ETIM 5.0	EC001855

#### UNSPSC

UNSPSC 6.01	31251501
UNSPSC 7.0901	31251501
UNSPSC 11	31251501
UNSPSC 12.01	31251501
UNSPSC 13.2	31251501

### Approvals

#### Approvals

# Cable - SAC-3P-M12MS/1,5-PUR/A-1L-Z VW - 1439560

## Approvals

Approvals

CSAus

---

Ex Approvals

---

Approvals submitted


---

## Approval details

CSAus	
Nominal current I <sub>N</sub>	4 A
Nominal voltage U <sub>N</sub>	24 V


## Drawings

Schematic diagram




Pin assignment M12 plug, 3-pos., valve connector

Schematic diagram




Valve connector pin assignment, type A

Cable cross section



PUR irradiated halogen-free orange [150]


Dimensional drawing




Valve connector, type A

# Cable - SAC-3P-M12MS/1,5-PUR/A-1L-Z VW - 1439560

Dimensional drawing

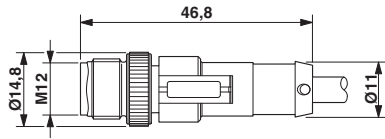


Dimensional drawing



Valve connector, type A, side view

M12 x 1 plug, straight

Circuit diagram

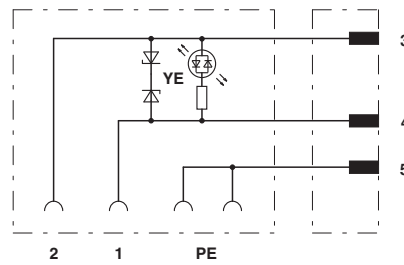

Contact assignment of M12 plug and valve connector

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Phoenix Contact:](#)

[1439560](#)