



DIMENSIONS:	
A	2.375" ± 0.063
B	1.350" ± 0.125
C	1.433" ± 0.063
D	2.000" ± 0.063
E	0.576" ± 0.063
F	1.701" ± 0.063
G	0.187" ± 0.015

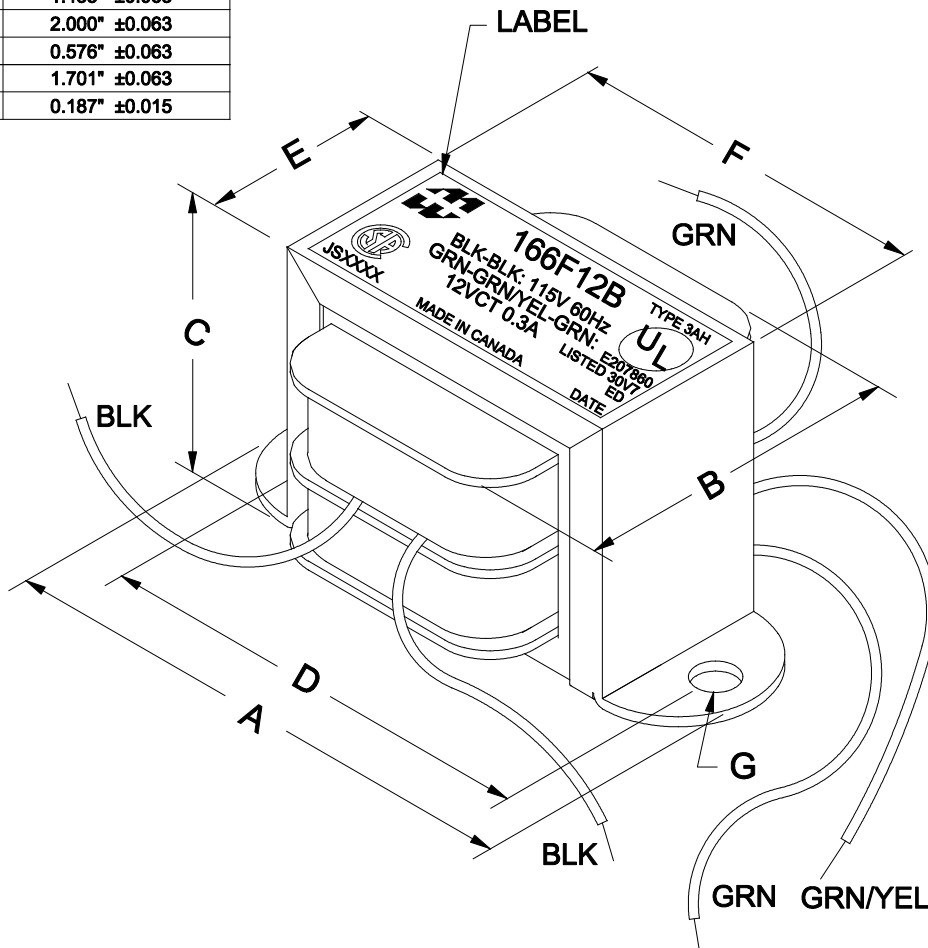

NOTE: ALL LEADS 6" OUT MIN. STRIPPED 0.5"



ELECTRICAL DATA:		
TESTS	CONDITIONS	ACCEPTANCE CRITERIA
I _{ex}	@ 115V, 60Hz, BLK - BLK	34.8mA Max.
Sec. N.L.V	@ 115V, 60Hz, BLK - BLK	
	GRN - GRN =	13.66V $\pm 2\%$
	GRN - GRN/YEL = GRN/YEL - GRN =	6.832V $\pm 2\%$
DCR	@ 20°C, BLK - BLK =	155.1 Ω $\pm 20\%$
	@ 20°C, GRN - GRN =	2.736 Ω $\pm 20\%$
HIPOT	PRIMARY - SECONDARY	2000V, 60Hz, 1 SEC

REV.#	REVISION	DATE	HAMMOND MANUFACTURING™			
0	RELEASED.	C.I. 02/11/15	ELECTRONIC DIVISION 52 RANKIN PLACE, WATERLOO, ONTARIO, N2J 3Z5			
			DWG. BY: C. ILIE	CHK'D BY:	TITLE: POWER TRANSFORMER	DWG. NO. 166F12B
			DATE: 02/11/15	APP'D. BY:		
				DIMENSIONS: IN(X) MM()		

PH # (519) 886-6181
FAX # (519) 886-9540