
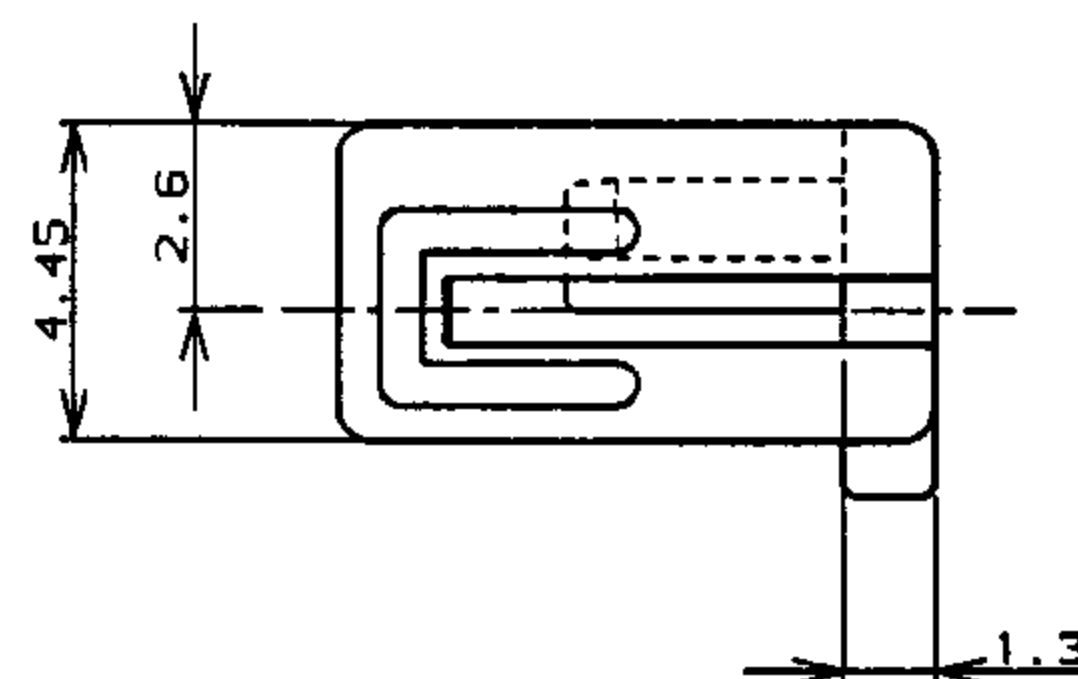
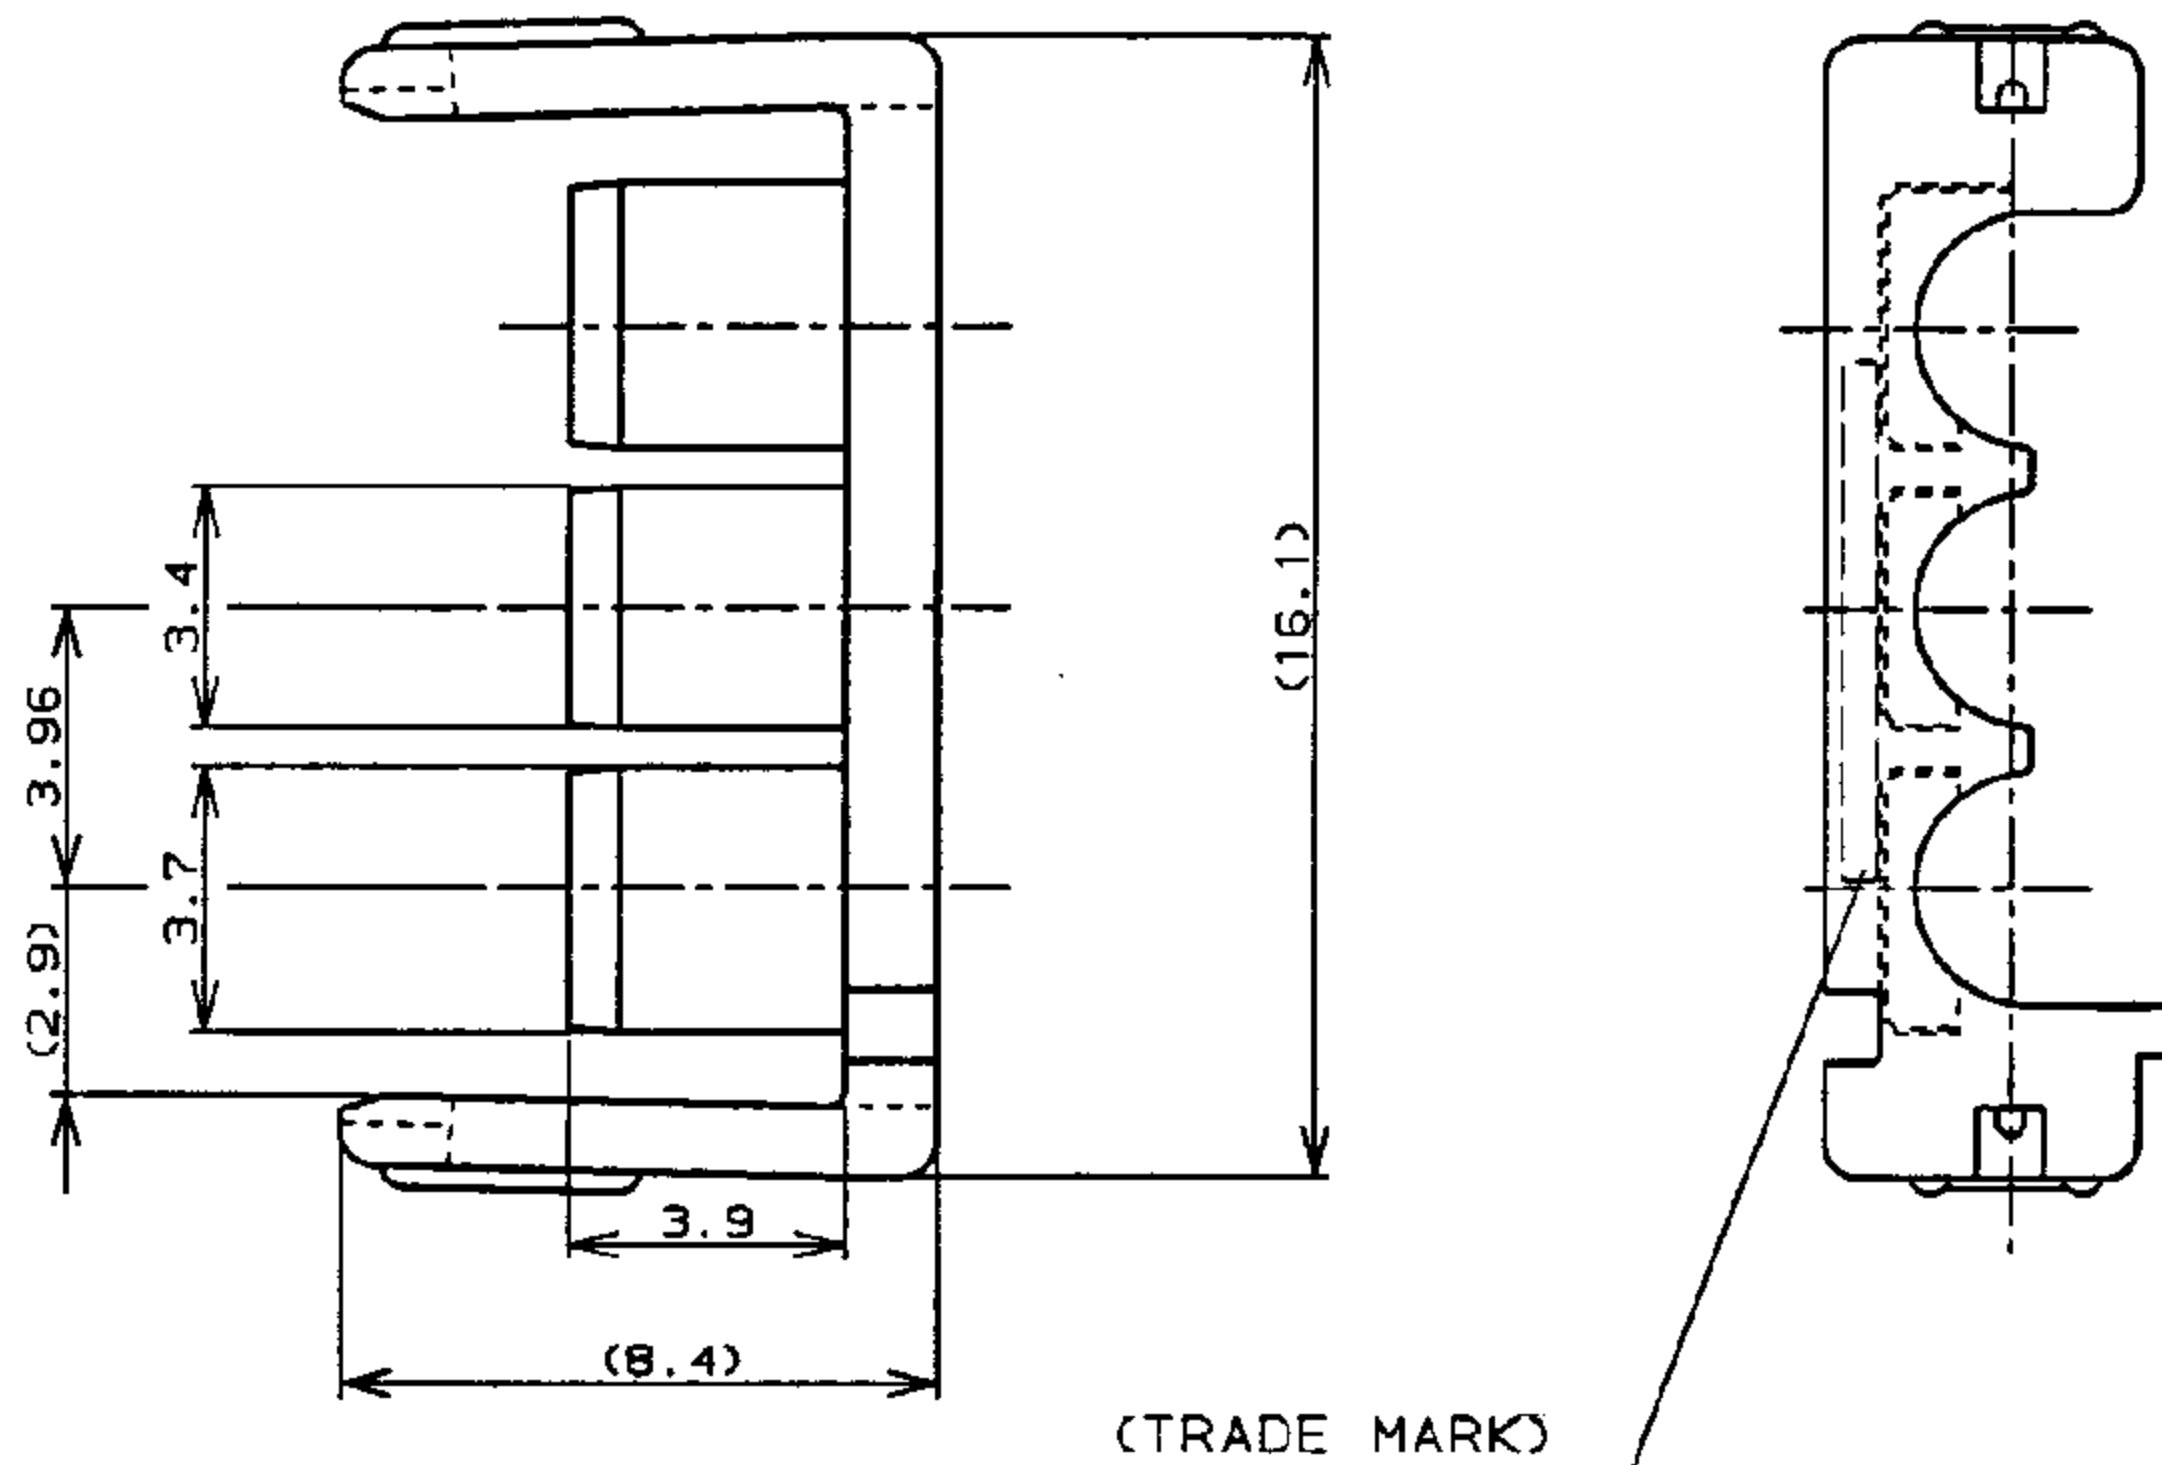


TABLE 1

PLUG HOUSING		3	177899-□, 368571-□
		6	177901-□, 368576-□
		9	177903-□, 2005254-□
CAP HOUSING	P/M	3	177907-□, 2005250-□
		6	177909-□, 368588-□
		9	177911-□
	F/H	3	179464-□, 368572-□
		6	179466-□, 2005253-□
APPLICABLE PRODUCT		(Pos.)	(P/N) (P/N)

NOTES,

1. APPLICABLE CONN. P/N: SEE TABLE 1
2. GENERAL TOLERANCES: ± 0.3
3. ACCORDING TO IEC 60335-1 4.2 EDITION
 - PART MEETS GWT 750°C & 850°C
 - PART MEETS BALL PRESSURE TESTING AT 125°C
 - MATERIAL HAS CTI VALUE OF 250V
4. PRODUCT SPEC: 108-61106
5. INSTRUCTION SHEET: 411-5638
6. MIN. THICKNESS OF INSULATION WALL

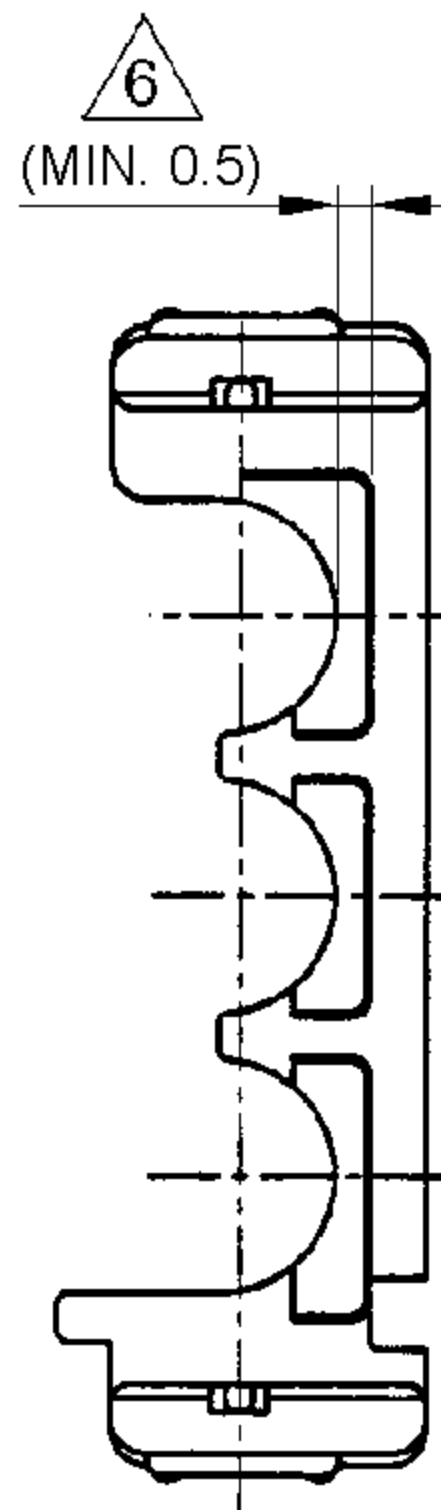

(NATURAL)	3	1-2005322-1
(PLATE COLOR)	(Pos.)	(P/N)

										 AMP KOREA Kyungsan, Korea					
					配線電線断面積 (WIRE RANGE)  mm² (AWG -)		被覆外径 (INSULATION DIA.) 1.3 ~ 2.8 mmφ		名称 (NAME) PDL 3P DBL PLATE 3.96mm (GWT)						
					材料 (MATERIAL)  PA66, UL 94 V-0		仕上 (FINISH) 		一般公差 (GENERAL TOLERANCE) 10mm以下 ±0.2 10mm以上 30mm以下 ±0.25 30mm以上 100mm以下 ±0.3 角 度 ±3°		B	LOC DS	番 号 (No.) 2005322		
A	RELEASED			SC	BW	29.OCT 09	DR.	SC KIM		DE.	JK SONG				
LTR	変更 (REVISION RECORD)			DR	CHK	DATE	CHK.	BW KNAG		APP.			尺 度 (SCALE) 	REV. A	SHEET 1 OF 1