



LOC	DIST	REVISIONS				
		P	LTR	DESCRIPTION	DATE	DWN APVD
AD	00		J2	REVISED PER ECO-12-001427	27JAN12	KH MM

D

C


B

A

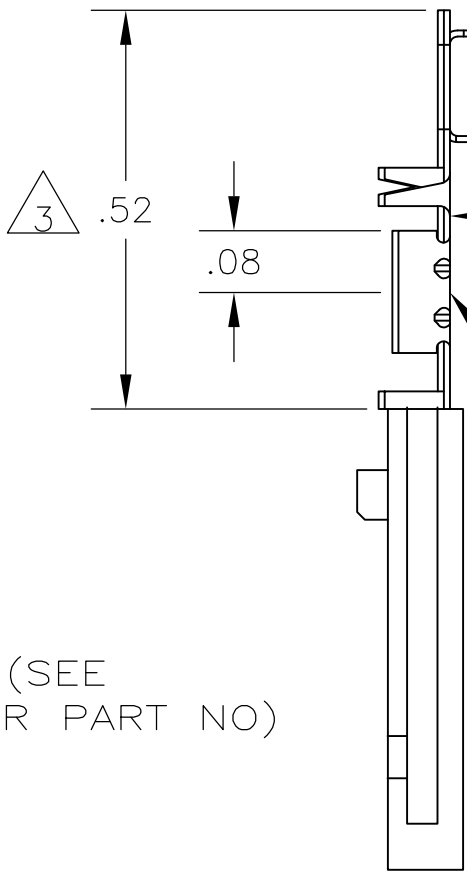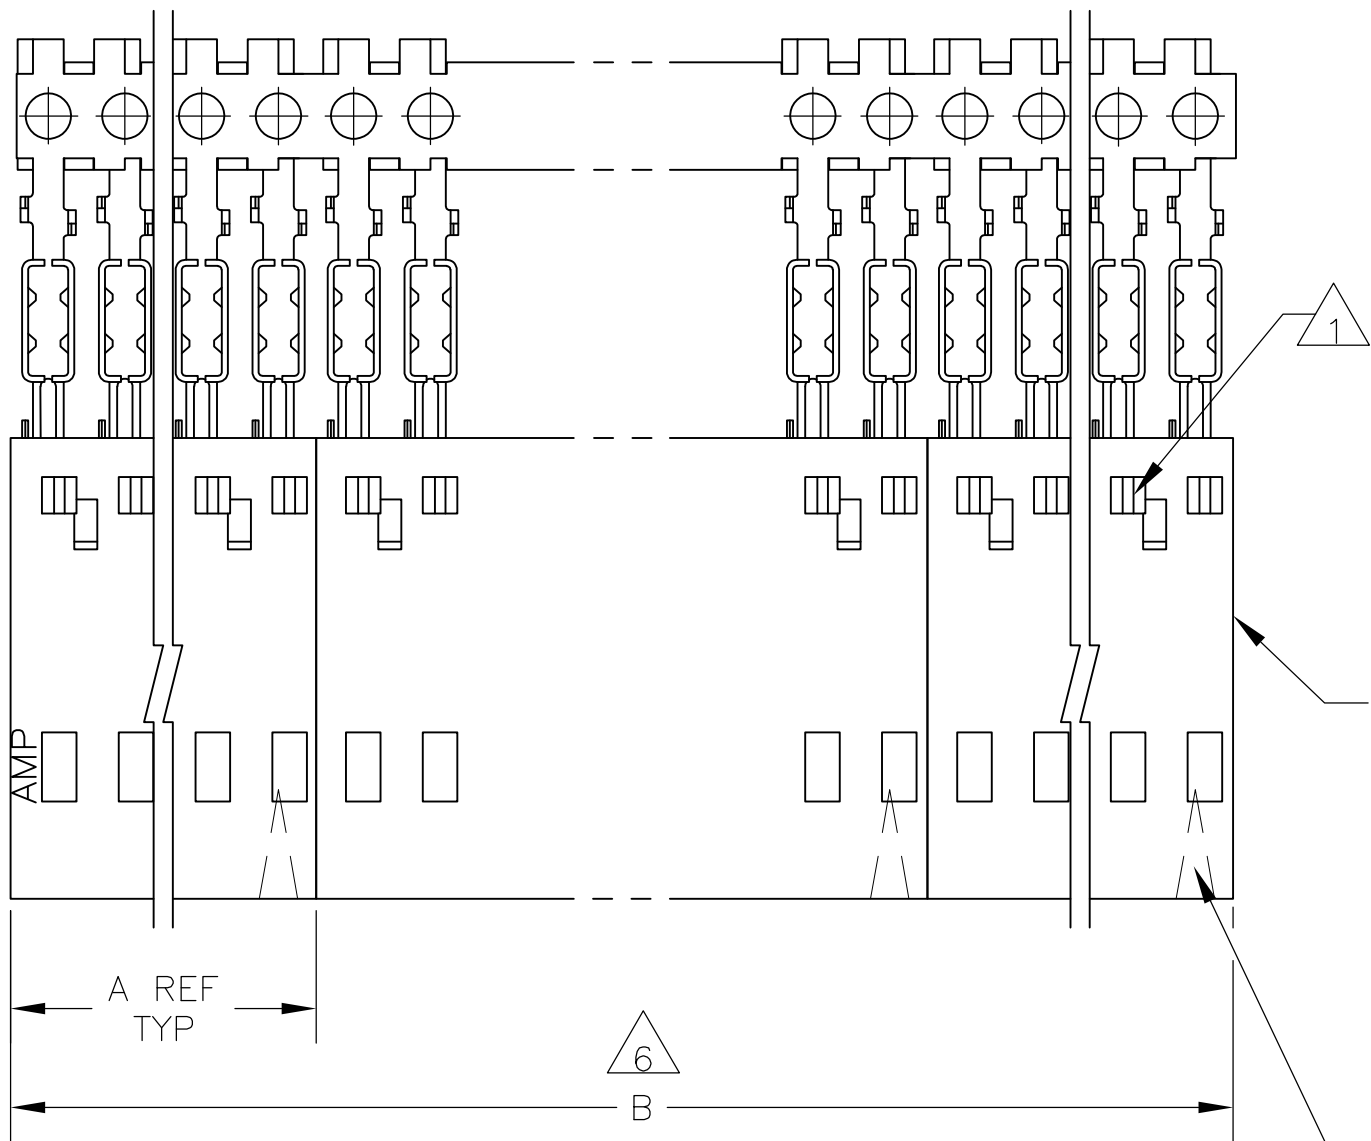

HOUSING (SEE
TABLE FOR PART NO)

POSITION #1 INDICATOR
(FAR SIDE)

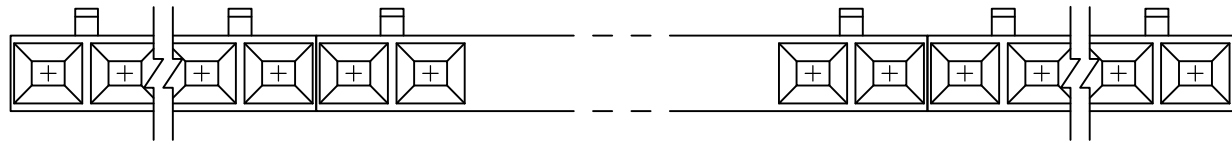

- 1

CONTACTS ARE LATCHED INTO THE PRELOAD WINDOWS
- 2

USE WITH #22-#26 AWG WIRE SIZE, .054/.030 INSULATION DIAMETER, .015 MAXIMUM INSULATION THICKNESS
- 3

THE DIMENSION APPLIES WITH THE FORWARD PRELOAD STOP IN CONTACT WITH THE HOUSING SURFACE
- 4

POINT OF MEASUREMENT FOR PLATING THICKNESS
- 5

FOR INDIVIDUAL ASSEMBLIES SEE PART NUMBER 103654
- 6

ASSEMBLIES ARE JOINED BY THE CARRIER STRIP. ORDER QUANTITY REFLECTS TOTAL NUMBER OF INDIVIDUAL ASSEMBLIES REQUIRED. SEE TABLE FOR NUMBER OF ASSEMBLIES PER STRIP.
- 7

.000100-.000200 BRIGHT TIN-LEAD OVER .000050 NICKEL
- 8

.000100-.000200 MATTE TIN OVER .000050 NICKEL
- 9

OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

9	OBSOLETE	8	2	2.40	1.198	1-104503-1	12	6-103950-1
9	OBSOLETE	8	2	2.20	1.098	1-104503-0	1 1	6-103950-0
9	OBSOLETE	8	2	2.00	.998	104503-9	10	5-103950-9
9	OBSOLETE	8	2	1.80	.898	104503-8	9	5-103950-8
		8	2	1.60	.798	104503-7	8	5-103950-7
9	OBSOLETE	8	2	1.40	.698	104503-6	7	5-103950-6
		8	4	2.39	.598	104503-5	6	5-103950-5
9	OBSOLETE	8	4	1.99	.498	104503-4	5	5-103950-4
9	OBSOLETE	8	5	1.99	.398	104503-3	4	5-103950-3
9	OBSOLETE	8	5	1.49	.298	104503-2	3	5-103950-2
		8	10	1.98	.198	104503-1	2	5-103950-1
		7	2	2.40	1.198	1-104503-1	12	1-103950-1
9	OBSOLETE	7	2	2.20	1.098	1-104503-0	1 1	1-103950-0
9	OBSOLETE	7	2	2.00	.998	104503-9	10	103950-9
9	OBSOLETE	7	2	1.80	.898	104503-8	9	103950-8
9	OBSOLETE	7	2	1.60	.798	104503-7	8	103950-7
9	OBSOLETE	7	2	1.40	.698	104503-6	7	103950-6
9	OBSOLETE	7	4	2.39	.598	104503-5	6	103950-5
9	OBSOLETE	7	4	1.99	.498	104503-4	5	103950-4
9	OBSOLETE	7	5	1.99	.398	104503-3	4	103950-3
9	OBSOLETE	7	5	1.49	.298	104503-2	3	103950-2
9	SUPERSEDED	7	10	1.98	.198	104503-1	2	103950-1
	PLATING	6	B	A	HOUSING PART NUMBER	NO OF POST	ASSEMBLY PART NUMBER ON STRIP	

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN L. MAYER 11-5-86	TE Connectivity			
DIMENSIONS: INCHES		CHK P.C.deYONG 11-12-86				
		APVD JEFF SCHEIFFER 11-13-86	NAME			
		PRODUCT SPEC 108-25034	PIN ASSEMBLY, AMPMODU MTE, SINGLE ROW, .100 C/L WITH GUIDE RIBS, FOR #22-#26 AWG WIRE SIZE, STRIP FORM			
MATERIAL HOUSING: FLAME RETARDANT THERMOPLASTIC, COLOR:BLACK PINS: PHOS BRONZE		APPLICATION SPEC 114-25026	SIZE A2	CAGE CODE 00779	DRAWING NO C-103950	RESTRICTED TO -
FINISH SEE TABLE		WEIGHT -	CUSTOMER DRAWING		SCALE 4:1	SHEET 1 of 1
					REV J2	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[103950-1](#) [103950-2](#) [103950-4](#) [103950-7](#)