


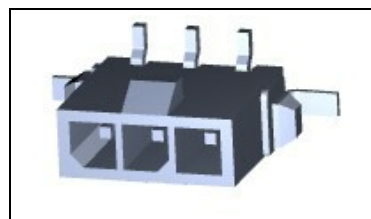

# 1445053-3 Product Details

[Share](#) [Print](#) [Email](#)


**1445053-3**

## 3mm Centerline, 250V, 5 A max.

Not EU RoHS or ELV Compliant ([Find RoHS Compliant Alternates](#))

### Product Highlights:


- Wire-to-Board
- Applies To Printed Circuit Board
- Connector
- Header
- Connector Style = Plug

[View all Features](#)

### Quick Links

- ▶ [Pricing & Availability](#)
- ▶ [Search for Tooling](#)
- ▶ [View Mating Products \(1\)](#)
- ▶ [Product Feature Selector](#)
- ▶ [Contact Us About This Product](#)

TE Internal Number: 1445053-3



Active

[View 3D PDF](#)

[Add to My Part List](#)
[Request Sample](#)
[Find Similar Products](#)
[Buy Product](#)

## Documentation & Additional Information

### Product Drawings:

- [VERTICAL SURFACE MOUNT HEADER ASSY, TIN CONTACTS,SUR...](#) (PDF, English)

### Catalog Pages/Data Sheets:

- [1773458-4\\_MICRO\\_MATE\\_N\\_LOK\\_CONNECTOR\\_SYSTEM\\_QRG](#) (PDF, English)
- [SOFT\\_SHELL\\_PIN\\_AND\\_SOCKET\\_CONNECTORS\\_CATALOG](#) (PDF, English)

### Product Specifications:

- None Available

### Application Specifications:

- [Micro MATE-N-LOK Connectors](#) (PDF, English)

### Instruction Sheets:

- None Available

### CAD Files: (CAD Format & Compression Information)

- [2D Drawing](#) (DXF, Version D)
- [3D Model](#) (IGES, Version D)
- [3D Model](#) (STEP, Version D)

[List all Documents](#)

### Additional Information:

- [Product Line Information](#)

### Related Products:

- [Tooling](#)
- [Mating Products \(1\)](#)

## Product Features (Please use the Product Drawing for all design activity)

### Product Type Features:

- Product Type = Connector
- Connector Type = Header
- PCB Mounting Orientation = Vertical
- PCB Mount Retention Type = SMT Hold Down
- PCB Mount Retention = With
- Sealed = No
- CSA File Number = LR 7189

### Mechanical Attachment:

- Contact Retention = Without
- Panel Mount Retention = Without
- Mating Retention Type = Locking Tab

### Electrical Characteristics:

- Contact - Rated Current (A) = 5
- Operating Voltage Reference = AC/DC
- Operating Voltage (VAC) = 250
- Operating Voltage (VDC) = 250

### Termination Features:

- Termination Method to Wire/Cable = Solder
- Termination Method to PC Board = Surface Mount

### Dimensions:

- Tail Length (mm [in]) = 1.53 [0.06]
- PCB Thickness, Recommended (mm [in]) = 1.57 [0.062]

### Housing Features:

- Connector Style = Plug
- Housing Color = Black
- Housing Material = High Temperature Nylon
- Centerline (mm [in]) = 3.00 [0.118]
- Mating Alignment = With
- Mating Alignment Type = Polarization

### Configuration Features:

- Number of Positions = 3
- Number of Rows = 1
- Strain Relief = Without

### Industry Standards:

- [RoHS/ELV Compliance](#) = Not ELV/RoHS compliant
- [Lead Free Solder Processes](#) = Not suitable for lead free processing
- VDE Tested = Yes
- Agency/Standard = CSA, UL
- UL Rating = Recognized
- UL File Number = E28476
- CSA Rating = Certified
- UL Flammability Rating = UL 94V-0

### Environmental:

- Operating Temperature (°C [°F]) = -40 - +105 [-40 - +221]

### Conditions for Usage:

- Applies To = Printed Circuit Board

**Body Features:**

- SMT Holddown Plating = Tin-Lead
- Mating Retention = With

**Contact Features:**

- Contact Type = Pin
- Contact Layout = In-Line
- Contact Base Material = Brass
- Contact Plating, Mating Area, Material = Tin-Lead
- Contact Plating, Mating Area, Thickness ( $\mu\text{m}$  [ $\mu\text{in}$ ]) = 2.54 [100]
- Tail Plating Material = Tin-Lead
- Underplate Material Thickness ( $\mu\text{m}$  [ $\mu\text{in}$ ]) = 1.27 [50.000]
- Multiple Contact Types = Without
- Tail Plating Thickness ( $\mu\text{m}$  [ $\mu\text{in}$ ]) = 2.54 [100]
- Underplate Material = Nickel

**Operation/Application:**

- Application Use = Wire-to-Board

**Packaging Features:**

- Packaging Method = Tape
- Packaging Quantity = 210

**Other:**

- Brand = AMP

**Corporate Information**

- [About TE](#)
- [Investors](#)
- [News Room](#)
- [Supplier Portal](#)
- [Careers](#)
- [Terms & Conditions](#)
- [Privacy Policy](#)
- [AODA Accessibility Policy](#)
- [AODA Multi-Year Accessibility Plan](#)

**Quick Links**

- [Distributor Inventory](#)
- [Product Cross Reference](#)
- [Documents & Drawings](#)
- [Product Compliance Support Center](#)
- [Site Map](#)

**Customer Support**

- [Email or Chat With Us](#)
- [Find a Phone Number](#)
- [Knowledge Base](#)
- [Manage Your Account](#)

**Keep Me Informed**