


LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
CE	16		A3	OBSOLETE PER MCO-40024188MCO	25MAR11	HG	TE

1. MAXIMUM CONNECTOR INSERTION LOSS IS 0.5dB PLUS CABLE ATTENUATION OF 0.7dB/km AT 1310nm (SEE TABLE)
2. MINIMUM RETURN LOSS: 55 dB
3. FOR 2-5492019-0, TRACE LABELS PLACED AT CENTER OF THE CABLE ASSEMBLY.
4. PRODUCT AND PROCESSING MUST MEET REQUIREMENTS OF THE CONNECTIVITY STANDARD 230-782

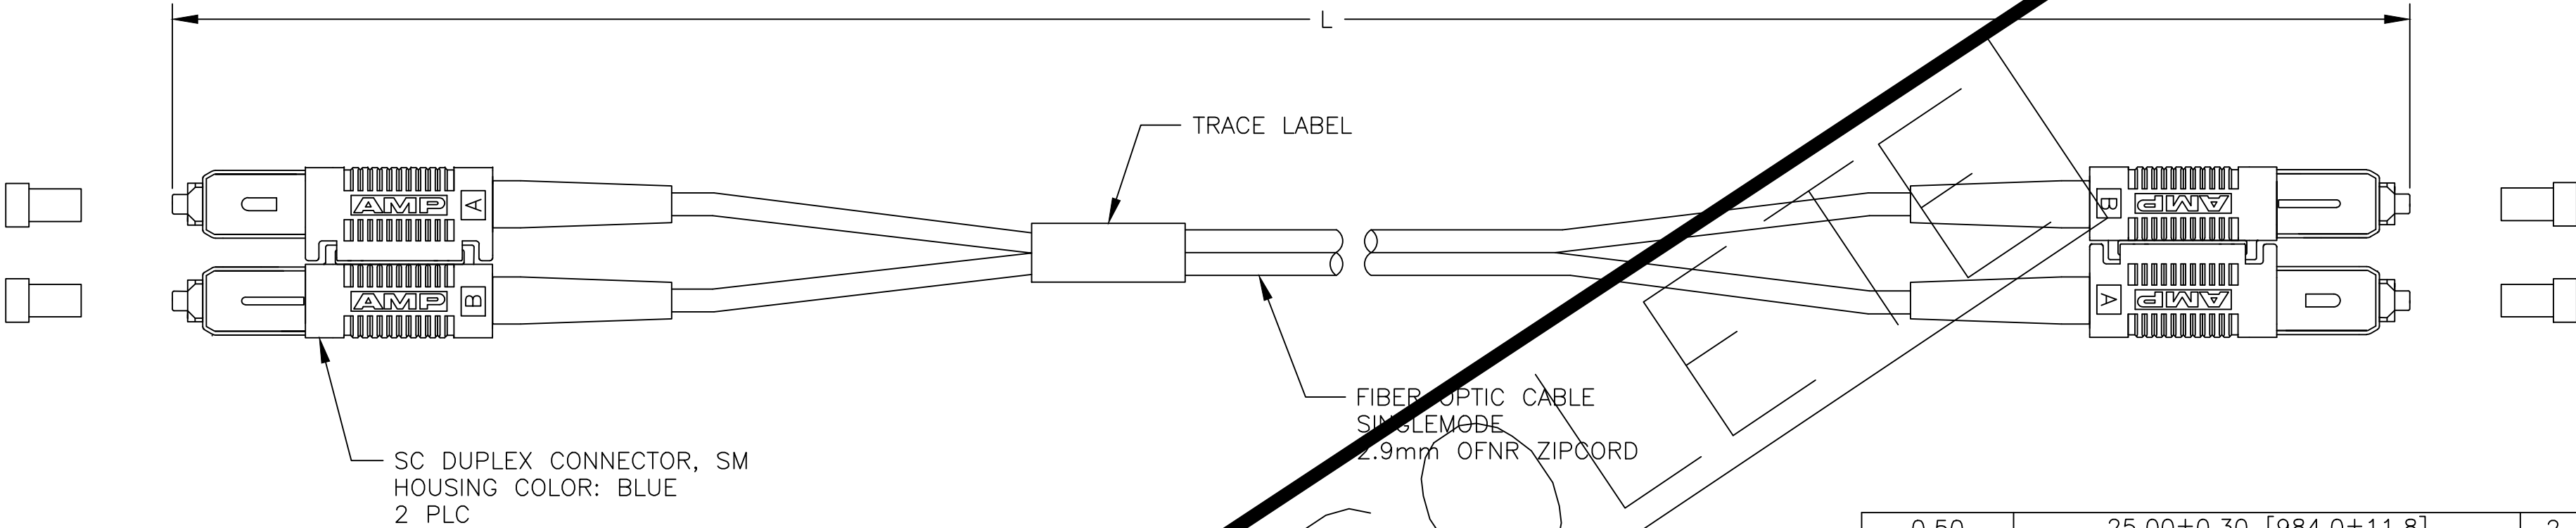

0.50	25.00±0.30 [984.0±11.8]	2-5492019-5
0.50	4.00±0.08 [157.5±3.2]	2-5492019-4
0.50	1.50±0.05 [59.1±2.0]	2-5492019-3
0.50	0.50±0.03 [19.7±1.0]	2-5492019-2
0.50	12.19±0.15 [480.0±5.9]	2-5492019-1
3. 0.50	0.30+0.05/-0.0 [11.8+2.0/-0]	2-5492019-0
0.50	0.61±0.03 [24.0±1.0]	1-5492019-4
0.53	50.00±0.50 [1968.5±19.7]	1-5492019-3
0.50	6.00±0.08 [236.2±3.0]	1-5492019-1
0.50	7.00±0.08 [275.6±3.2]	1-5492019-0
0.52	30.00±0.30 [1181.1±11.8]	5492019-8
0.51	20.00±0.30 [787.4±11.8]	5492019-7
0.50	15.00±0.15 [591.6±5.9]	5492019-6
0.50	10.00±0.15 [393.7±5.9]	5492019-5
0.50	5.00±0.08 [196.8±3.2]	5492019-4
0.50	3.00±0.05 [118.1±2.0]	5492019-3
0.50	2.00±0.05 [78.7±2.0]	5492019-2
0.50	1.00±0.05 [39.4±2.0]	5492019-1
MAX IL 1 (dB)	L METERS [INCHES]	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN J. W. DAVIS 24OCT05	TE Connectivity		
		CHK J. DUNCAN 20AUG2015			
DIMENSIONS: METERS [INCHES]		APVD F. McCORKEL 24OCT05	NAME		
		PRODUCT SPEC	CABLE ASSEMBLY, FIBER OPTIC, SINGLEMODE, 2.9mm OFNR ZIPCORD SC DUPLEX TO SC DUPLEX, RoHS		
		APPLICATION SPEC			
MATERIAL		WEIGHT	SIZE A2	CAGE CODE 00779	DRAWING NO C-5492019
			CUSTOMER DRAWING		RESTRICTED TO
			SCALE NTS	SHEET 1 of 1	REV A3