

Housing - HC-B 06-TFL-N-M1M20S - 1460343

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



HEAVYCON B6 sleeve housing, for single locking latch, height: 56 mm, with 1 x M20 screw connection, lateral cable outlet



Key Commercial Data

| | |
|--------------------------------------|-----------|
| Packing unit | 1 STK |
| Weight per Piece (excluding packing) | 149.000 g |
| Custom tariff number | 85389099 |
| Country of origin | Germany |

Technical data

Dimensions

| | |
|-------------------------|----------------|
| Height | 56 mm |
| Width | 43 mm |
| Length | 60 mm |
| Wrench size, union nut | 20 mm |
| External cable diameter | 5 mm ... 12 mm |

Ambient conditions

| | |
|--------------------------------------|-------------------|
| Degree of protection of housing (IP) | IP65 |
| Ambient temperature (operation) | -40 °C ... 125 °C |

General

| | |
|--------------|--|
| Note | For contact inserts HC-B6, BB10, DD24, M |
| Size | B6 |
| Housing type | Sleeve housing |
| Locking type | for single locking latch |

Housing - HC-B 06-TFL-N-M1M20S - 1460343


Technical data

General

| | |
|------------------------------|---------------------|
| No. of cable outlets | 1 |
| Cable exit | lateral |
| Screw connection | with |
| Type of the screw connection | 1x M20 |
| Housing material | Aluminum die-cast |
| Housing surface material | Powder-coated, gray |

Drawings

Dimensional drawing

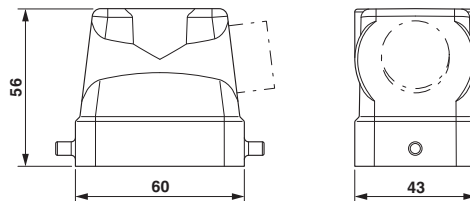

Dimensional drawing

Classifications

eCl@ss

| | |
|------------|----------|
| eCl@ss 4.0 | 27140816 |
| eCl@ss 4.1 | 27140816 |
| eCl@ss 5.0 | 27143424 |
| eCl@ss 5.1 | 27143424 |
| eCl@ss 6.0 | 27143424 |
| eCl@ss 7.0 | 27440209 |
| eCl@ss 8.0 | 27440202 |
| eCl@ss 9.0 | 27440202 |

ETIM

| | |
|----------|----------|
| ETIM 3.0 | EC000437 |
| ETIM 4.0 | EC000437 |
| ETIM 5.0 | EC000437 |

UNSPSC

| | |
|---------------|----------|
| UNSPSC 6.01 | 31261502 |
| UNSPSC 7.0901 | 31261502 |

Housing - HC-B 06-TFL-N-M1M20S - 1460343

Classifications

UNSPSC

| | |
|--------------|----------|
| UNSPSC 11 | 31261502 |
| UNSPSC 12.01 | 31261502 |
| UNSPSC 13.2 | 31261502 |

Approvals

Approvals

Approvals

EAC

Ex Approvals

Approval details

| |
|-------------------------|
| EAC 7500651.22.01.00246 |
|-------------------------|

Accessories

Accessories

Full screw connection

Cable gland - HC-K-KV-M20(8-13) - 1690626



Plastic screw connection up to 5 bar, thread length: 8 mm, cable diameter: 8 - 13 mm, WAF 24, screw connection: M20

Cable gland - HC-M-KV-M20(11-16) - 1645998



Metal screw connection up to 5 bar, thread length: 6 mm, cable diameter: 11 - 16 mm, WAF 27, screw connection: M20

Housing - HC-B 06-TFL-N-M1M20S - 1460343

Accessories

Cable gland - HC-M-KV-M20(1ASI) - 1584017



Metal screw connection for an AS-Interface flat-ribbon conductor, thread type M20

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Phoenix Contact:](#)

[1460343](#)