


THIS APPLICATOR APPLIES TERMINAL WITH A SEAL.

APPLY TORQ-SEAL IN ALLEN SOCKET TO FILL HOLE AFTER
FLAT HD HAS BEEN ADJUSTED TO CORRECT HEIGHT AT
QUALIFICATION. APPLY PN 1-23419-5 LOC-TITE TO THREADS.

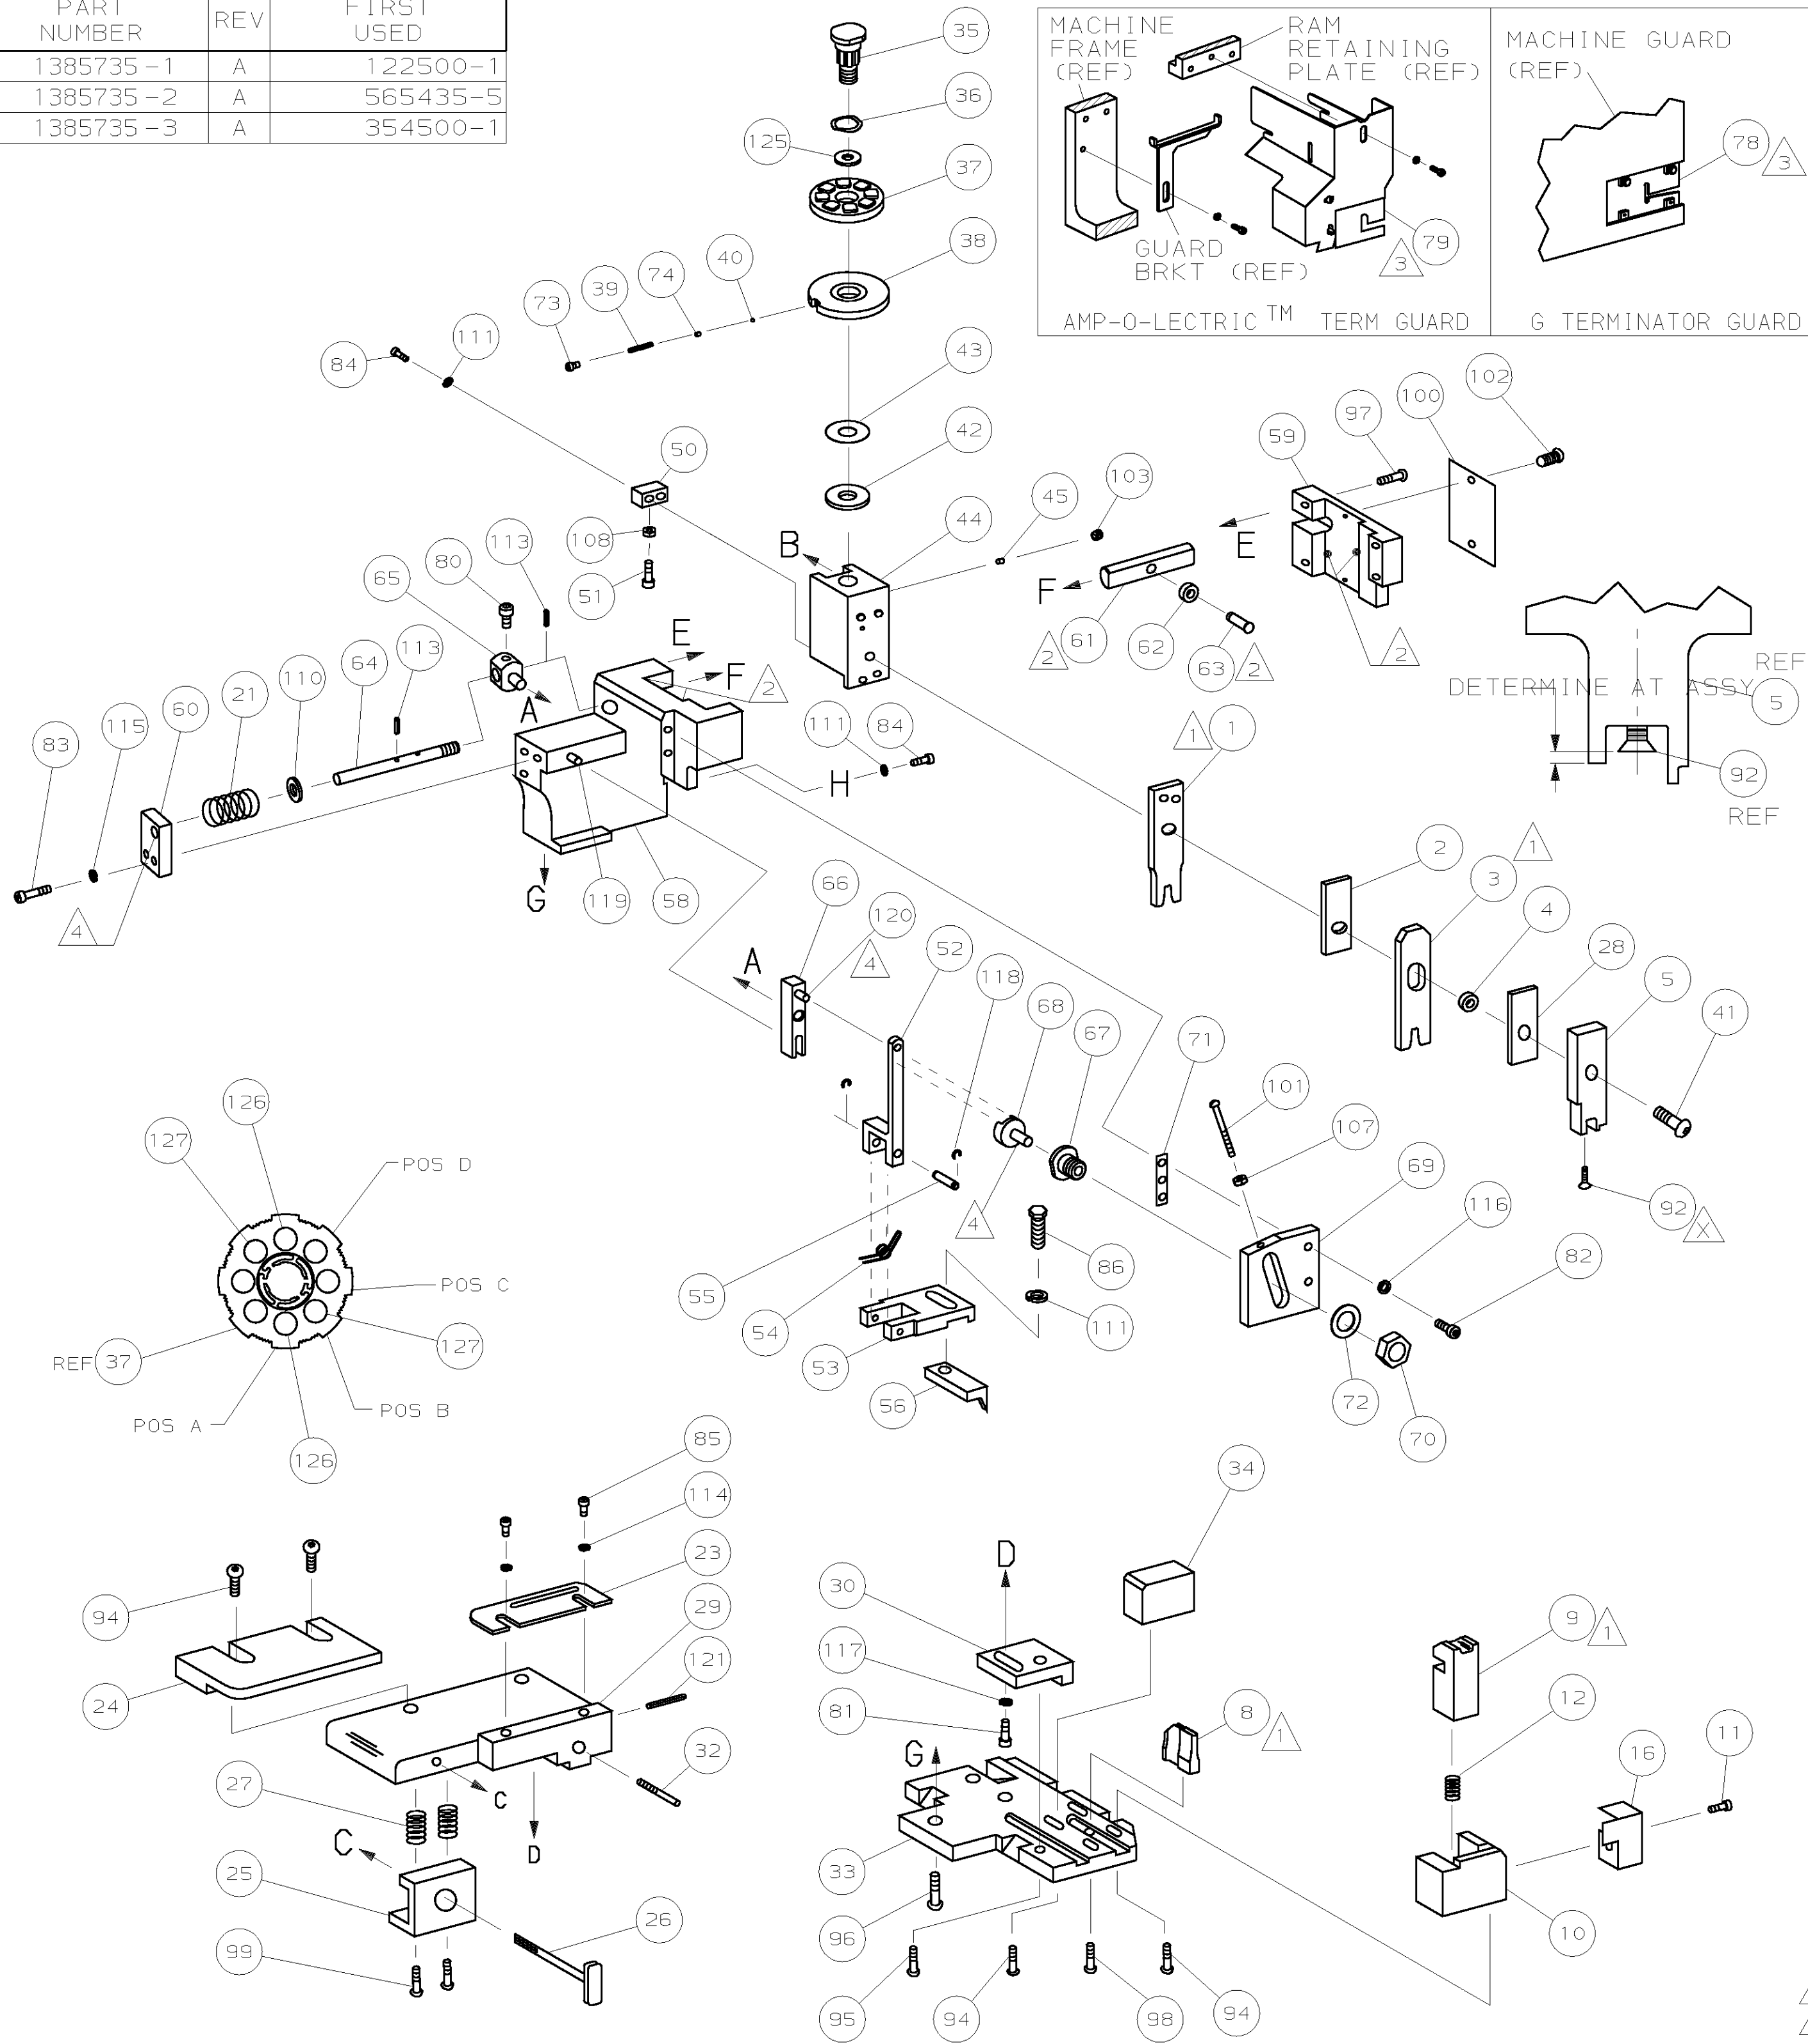

		A	REVISED
P	F	LTR	REVISION RECORD