

# Corrugated pipe opener - WR-OEF-PG29 - 1853641

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Opener for corrugated tube, to disassemble corrugated tube screw connection, size Pg29

The illustration shows version WR-OEF-PG 21



## Key Commercial Data

Packing unit	1 STK
Minimum order quantity	5 STK
GTIN	 4 017918 134303
GTIN	4017918134303
Weight per Piece (excluding packing)	7.770 g
Custom tariff number	82055980
Country of origin	Germany

## Technical data

### General

Pg screw connection	Pg29
Material	PA


### Environmental Product Compliance

China RoHS	Environmentally friendly use period: unlimited = EFUP-e
	No hazardous substances above threshold values

## Drawings

# Corrugated pipe opener - WR-OEF-PG29 - 1853641

Dimensional drawing

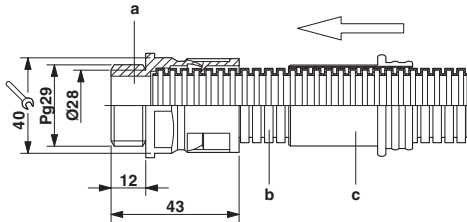


**Assembly instructions for Pg29 corrugated pipe**

- a = Corrugated screw connection
- b = Corrugated pipe
- c = Opener

**Installation note:**

Cut the corrugated pipe in the groove to retain a round shape for insertion. The lighter seal (not depicted in the illustration) is positioned in the corrugated pipe screw connection below the safety latch. The darker outer seal (not depicted in the illustration) is placed over the corrugated pipe screw connection from outside. The corrugated pipe is then pushed as far as possible into the corrugated pipe screw connection and clicks into place. The screw connection is opened by placing the yellow corrugated pipe opener with force between the safety latch and the corrugated tube and the corrugated pipe is then pulled out.

Dimensional drawing

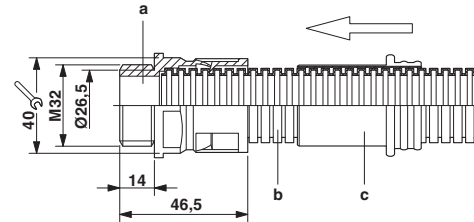

**Assembly instructions for M32 corrugated pipe**

- a = Corrugated screw connection
- B = Corrugated pipe
- c = Opener

**Installation note:**

Cut the corrugated pipe in the groove to retain a round shape for insertion. The lighter seal (not depicted in the illustration) is positioned in the corrugated pipe screw connection below the safety latch. The darker outer seal (not depicted in the illustration) is placed over the corrugated pipe screw connection from outside. The corrugated pipe is then pushed as far as possible into the corrugated pipe screw connection and clicks into place. The screw connection is opened by placing the yellow corrugated pipe opener with force between the safety latch and the corrugated tube and the corrugated pipe is then pulled out.

## Classifications

eCl@ss

eCl@ss 4.0	27141209
eCl@ss 4.1	27141209
eCl@ss 5.0	27149109
eCl@ss 5.1	27149109
eCl@ss 6.0	27149109
eCl@ss 7.0	27149109
eCl@ss 8.0	27142703

ETIM

ETIM 2.0	EC000441
ETIM 3.0	EC000441
ETIM 4.0	EC000441
ETIM 5.0	EC000127
ETIM 6.0	EC000127

UNSPSC

UNSPSC 6.01	31261502
-------------	----------

## Corrugated pipe opener - WR-OEF-PG29 - 1853641

### Classifications

#### UNSPSC

UNSPSC 7.0901	31261502
UNSPSC 11	31261502
UNSPSC 12.01	31261502
UNSPSC 13.2	31261502