


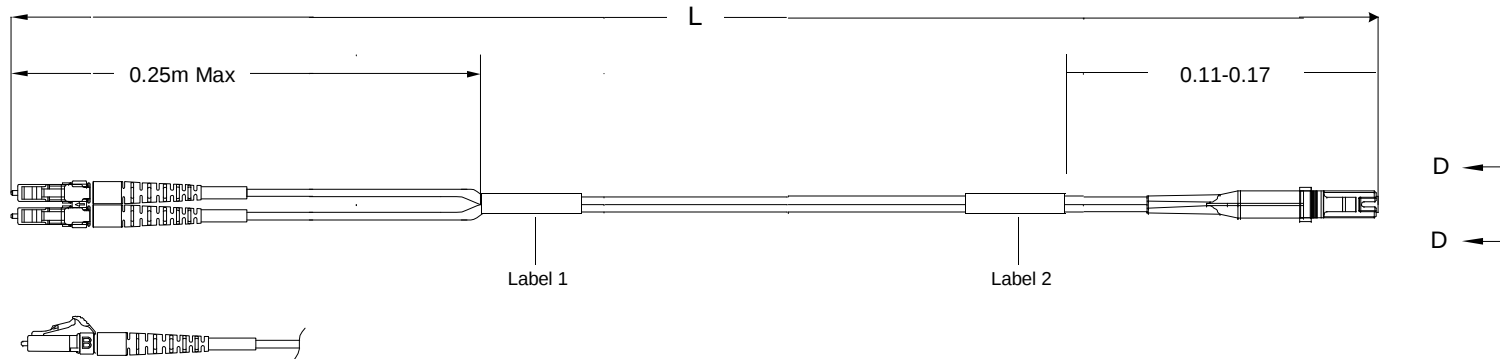

Left Side
Connector(s): LC-Duplex Secure
Mode: MM
Housing Color: Yellow
Geom. Spec: N/A


Fiber Path

A - ——— - Fiber B
B - ——— - Fiber A

Right Side
Connector(s): MT-RJ (No Pins)
Mode: MM
Housing Color: Black
Geom. Spec: 115-1215

Notes:

- 1 OM3 assemblies tested at 850nm, all other multimode tested at 1300nm
- 3 Label 2 will not be present on any cable assembly less than 5 meters long.
- 4 Includes dust caps (not shown on print).



VIEW D-D
NOT TO SCALE

THIS INFORMATION IS CONFIDENTIAL AND PROPRIETARY TO TYCO ELECTRONICS, INC. IT IS TO BE KEPT SECRET AND NOT DISCLOSED TO ANY OTHER PERSON OR ENTITY WITHOUT THE WRITTEN AUTHORIZATION OF TYCO ELECTRONICS CORPORATION, HARRISBURG, PENNSYLVANIA.

LOC
CE
DIST
16

CAC Customer Layout Rev: D

	A1	Rev Per EC#	RELEASE	2/21/2011	-	DK			
P	LTR	REVISION RECORD	DATE	DWN	APVD				

DIMENSIONS: meters	TOLERANCES UNLESS OTHERWISE SPECIFIED:
	0 PLC ± . 1 PLC ± . 2 PLC ± . 3 PLC ± . 4 PLC ± .
Restricted To:	✓

DWN Cable Assy Configurator	MATERIAL -	HEAT TREAT -
CHK Doug Kirsch	Tyco Electronics, Inc. Harrisburg, PA 17105-3608	
APVD Doug Kirsch		
NAME FO C/A - 2 fiber, 50/125, OFNP (Plenum) jacket, LC-Duplex Secure to MT-RJ (No Pins)	SCALE NTS	SIZE A2
DRAWING NO C-1906990	SHEET 1 of 3	REV A1

Part #	L (meters)	L (feet)	LC-Duplex Secure, Yellow		MT-RJ (No Pins), Black	
			IL (dB)	RL (dB)	IL (dB)	RL (dB)
0-1906990-1	0.950 - 1.050	3.11 - 3.44	0.5	-	0.5	20
0-1906990-2	1.950 - 2.050	6.39 - 6.72	0.5	-	0.5	20
0-1906990-3	2.950 - 3.050	9.67 - 10.00	0.5	-	0.5	20
0-1906990-4	3.920 - 4.080	12.86 - 13.38	0.51	-	0.51	20
0-1906990-5	4.920 - 5.080	16.14 - 16.66	0.51	-	0.51	20
0-1906990-6	5.920 - 6.080	19.42 - 19.94	0.51	-	0.51	20
0-1906990-7	6.920 - 7.080	22.70 - 23.22	0.51	-	0.51	20
0-1906990-8	7.920 - 8.080	25.98 - 26.50	0.51	-	0.51	20
0-1906990-9	8.850 - 9.150	29.03 - 30.01	0.51	-	0.51	20
1-1906990-0	9.850 - 10.150	32.31 - 33.30	0.52	-	0.52	20
1-1906990-1	10.850 - 11.150	35.59 - 36.58	0.52	-	0.52	20
1-1906990-2	11.850 - 12.150	38.87 - 39.86	0.52	-	0.52	20
1-1906990-3	12.850 - 13.150	42.15 - 43.14	0.52	-	0.52	20
1-1906990-4	13.850 - 14.150	45.43 - 46.42	0.52	-	0.52	20
1-1906990-5	14.850 - 15.150	48.72 - 49.70	0.52	-	0.52	20
1-1906990-6	15.840 - 16.160	51.96 - 53.01	0.52	-	0.52	20
1-1906990-7	16.830 - 17.170	55.21 - 56.33	0.53	-	0.53	20
1-1906990-8	17.820 - 18.180	58.46 - 59.64	0.53	-	0.53	20
1-1906990-9	18.810 - 19.190	61.71 - 62.95	0.53	-	0.53	20
2-1906990-0	19.800 - 20.200	64.96 - 66.27	0.53	-	0.53	20
2-1906990-1	20.790 - 21.210	68.20 - 69.58	0.53	-	0.53	20
2-1906990-2	21.780 - 22.220	71.45 - 72.90	0.53	-	0.53	20
2-1906990-3	22.770 - 23.230	74.70 - 76.21	0.53	-	0.53	20
2-1906990-4	23.760 - 24.240	77.95 - 79.52	0.54	-	0.54	20
2-1906990-5	24.750 - 25.250	81.20 - 82.84	0.54	-	0.54	20
2-1906990-6	25.740 - 26.260	84.44 - 86.15	0.54	-	0.54	20
2-1906990-7	26.730 - 27.270	87.69 - 89.46	0.54	-	0.54	20
2-1906990-8	27.720 - 28.280	90.94 - 92.78	0.54	-	0.54	20
2-1906990-9	28.710 - 29.290	94.19 - 96.09	0.54	-	0.54	20
3-1906990-0	29.700 - 30.300	97.44 - 99.40	0.55	-	0.55	20
3-1906990-1	30.690 - 31.310	100.68 - 102.72	0.55	-	0.55	20
3-1906990-2	31.680 - 32.320	103.93 - 106.03	0.55	-	0.55	20
3-1906990-3	32.670 - 33.330	107.18 - 109.35	0.55	-	0.55	20
3-1906990-4	33.660 - 34.340	110.43 - 112.66	0.55	-	0.55	20
3-1906990-5	34.650 - 35.350	113.68 - 115.97	0.55	-	0.55	20
3-1906990-6	35.640 - 36.360	116.92 - 119.29	0.55	-	0.55	20
3-1906990-7	36.630 - 37.370	120.17 - 122.60	0.56	-	0.56	20
3-1906990-8	37.620 - 38.380	123.42 - 125.91	0.56	-	0.56	20
3-1906990-9	38.610 - 39.390	126.67 - 129.23	0.56	-	0.56	20
4-1906990-0	39.600 - 40.400	129.92 - 132.54	0.56	-	0.56	20
5-1906990-0	49.500 - 50.500	162.40 - 165.68	0.58	-	0.58	20
8-1906990-1	1.450 - 1.550	4.75 - 5.08	0.5	-	0.5	20

Qty	U of M	Description	Item No.
2	piece	Trace Label	14
2	piece	Eyelet/Shrink tube assembly - White	13
1	piece	MT-RJ TwinZip Bend Limiting Boot, Beige	12
1	piece	MT-RJ FERRULE, THERMOPLAST,MM	11
AR	meter	2 fiber, 50/125, 1.8mm, Twinzip, Yellow, OFNP (Plenum)	10
2	piece	LC Connector Assy, 1.6mm-2.0mm, MM	9
1	piece	LC Duplex clip, black	8
2	piece	LC, SC, FC Straight Boot, Beige	7
1	piece	CRIMP EYELET, MT-RJ	6
1	piece	MT-RJ, SPRING PUSH, UNIVERSAL	5
1	piece	PIN KEEPER, 3.8MM	4
1	piece	SPRING, MT-RJ, 3.8 DESIGN	3
1	piece	DUST COVER, MT-RJ	2
1	piece	HOUSING, CONN, MT-RJ,BLACK	1

	A1	Rev Per EC#	RELEASE	2/21/2011	-	DK	APVD
P	LTR	REVISION RECORD		DATE	DIN	APVD	

DIMENSIONS:
meters

RESTRICTED TO:
v

TO TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 P/LC ± -
1 P/LC ± -
2 P/LC ± -
3 P/LC ± -
4 P/LC ± -
5 P/LC ± -

DWG Cable Assy Configurator

CHK Doug Kirsch

APVD Doug Kirsch

NAME FO C/A - 2 fiber, 50/125, OFNP (Plenum) jacket, LC-Duplex Secure to MT-RJ (No Pins)

SCALE NTS

SIZE A2

DRAWING NO C- 1906990

SHEET 2 of 3

REV A1

MATERIAL -

HEAT TREAT -

Tyco Electronics, Inc.
Harrisburg, PA 17105-3608

THIS DRAWING IS A CONTROLLED DOCUMENT.

THIS INFORMATION IS CONFIDENTIAL AND PROPRIETARY TO TYCO ELECTRONICS, INC. IT IS TO BE KEPT CONFIDENTIAL AND NOT DISCLOSED TO ANY OTHER PARTY WITHOUT THE WRITTEN AUTHORIZATION OF TYCO ELECTRONICS CORPORATION, HARRISBURG, PENNSYLVANIA.

LOC
CE
DIST
16

Label 1

Per specification 107-1645-1



Trace # - Bar Code
Trace # - Human Readable
Part Number
Country of Origin

This label is used on all lengths on this drawing.

Label 2

Per specification 107-1645-1



Trace # - Bar Code
Trace # - Human Readable
Part Number
Country of Origin

This label is used on all lengths on this drawing.

	A1	Rev Per EC#	RELEASE	2/21/2011	-	DK	
P	LTR	REVISION RECORD		DATE	DIN	APVD	

DIMENSIONS: meters	TOLERANCES UNLESS OTHERWISE SPECIFIED:
	Ø PLC ± .
	1 PLC ± .
	2 PLC ± .
	3 PLC ± .
	4 PLC ± .

Restricted To:
✓

DWN	Cable Assy Configurator		MATERIAL	HEAT TREAT	
CHK	Doug Kirsch		-	-	
APVD	Doug Kirsch		AMP Tyco Electronics, Inc. Harrisburg, PA 17105-3608		
NAME	FO C/A - 2 fiber, 50/125, OFNP (Plenum) jacket, LC-Duplex Secure to MT-RJ (No Pins)				
SCALE	SIZE	DRAWING NO	SHEET	REV	
NTS	A2	C-1906990	3 of 3	A1	

8

7

6

5

4

3

2

1