
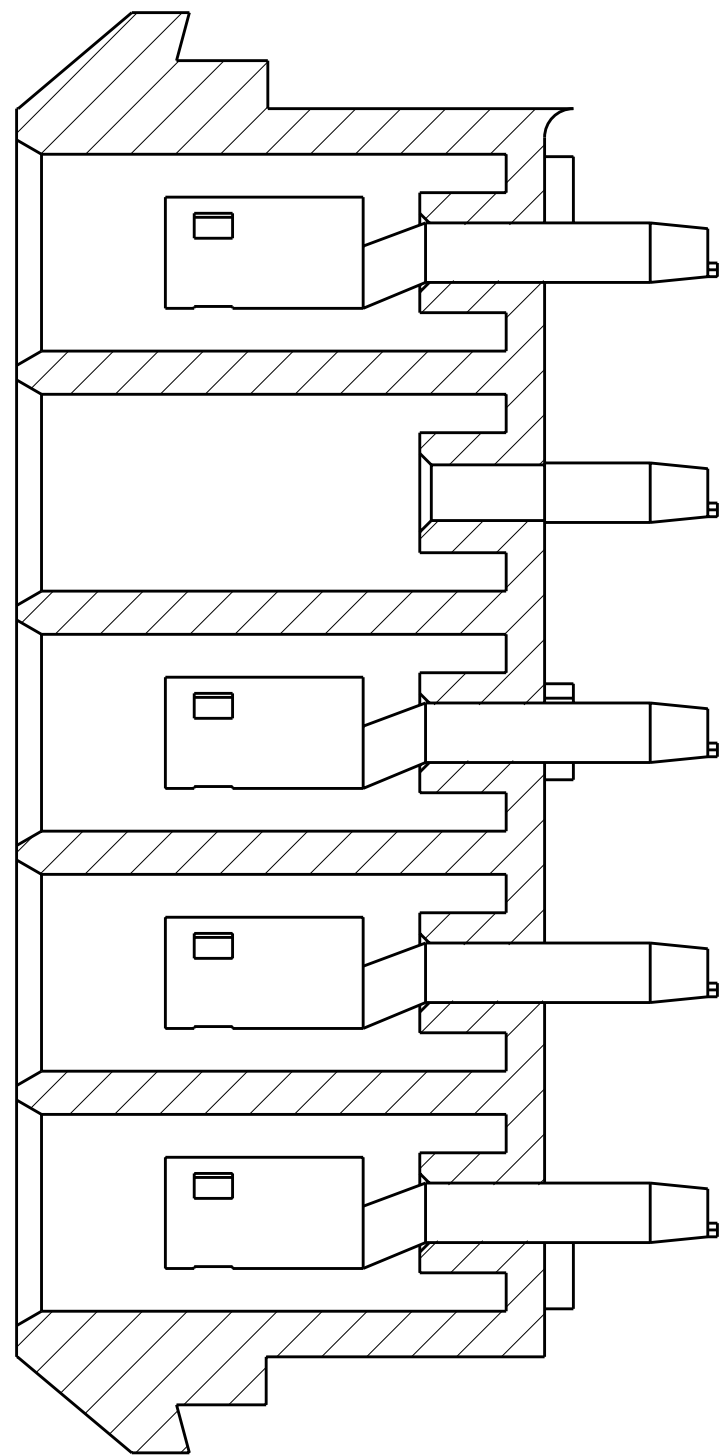
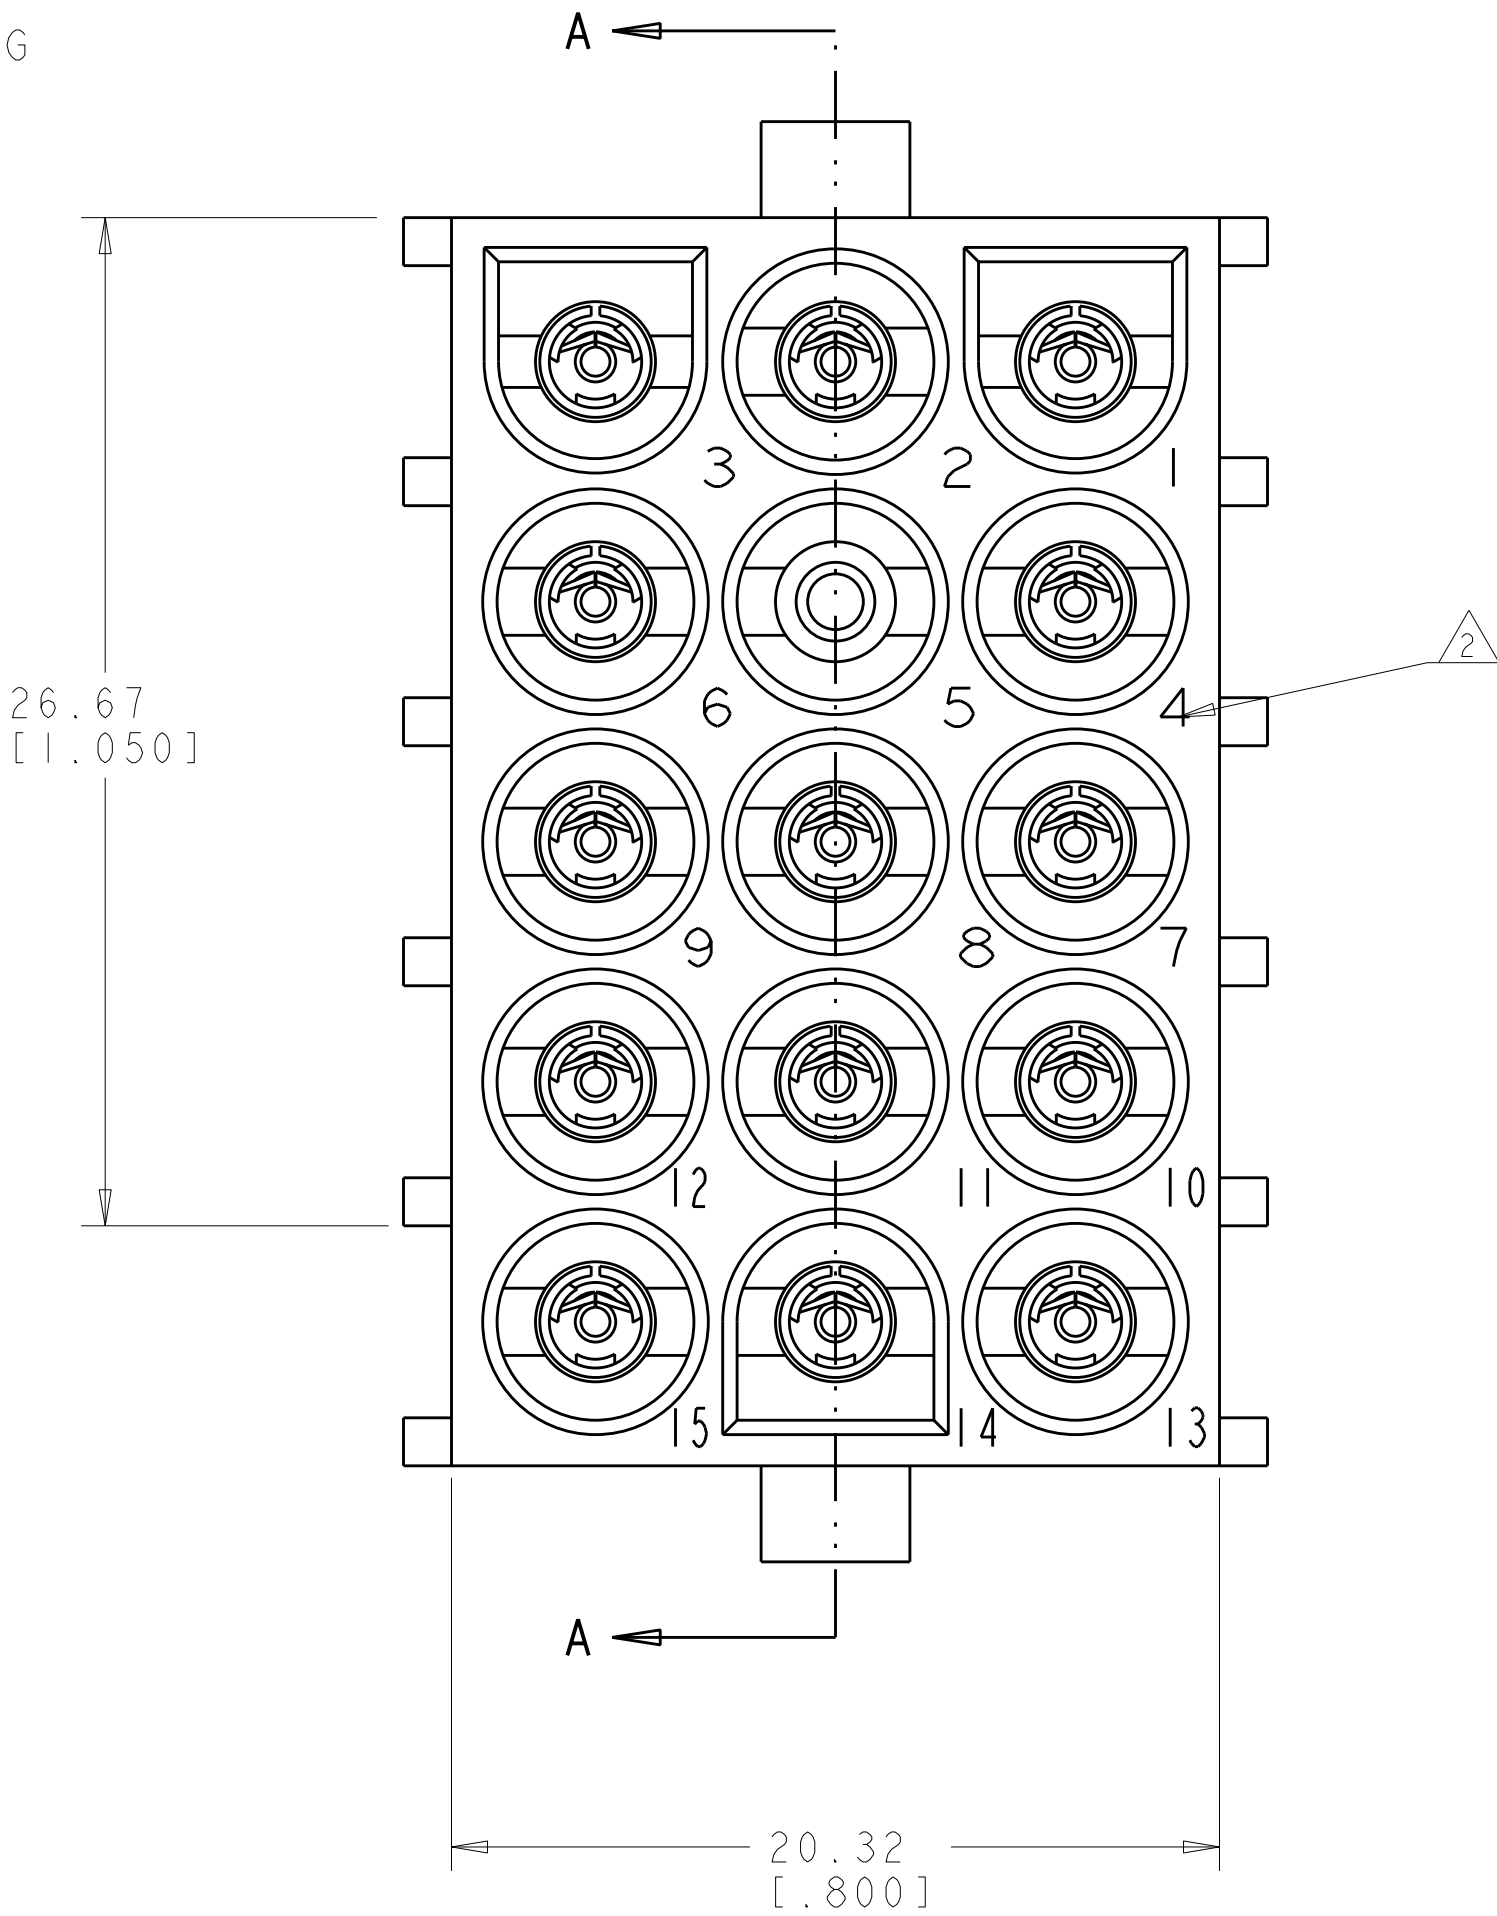


LOC		DIST		REVISIONS					
CM		00		REV	LYR	DESCRIPTION	DATE	DWN	APVD
				A		RELEASED PER WR-05-27	04MAY05	KW	SR
				A1		ECO-07-029079	07DEC2007	KW	DC



1. PARTS COMPLY TO AMP SOLDERABILITY SPECIFICATION 109-11-3.

2.  CIRCUIT IDENTIFICATION CHARACTERS ARE ADJACENT TO THE INDICATED CAVITIES, BUT LOCATION AND ORIENTATION MAY DIFFER FROM PRINT.

3. DIMENSIONS IN BRACKETS ARE IN INCHES.

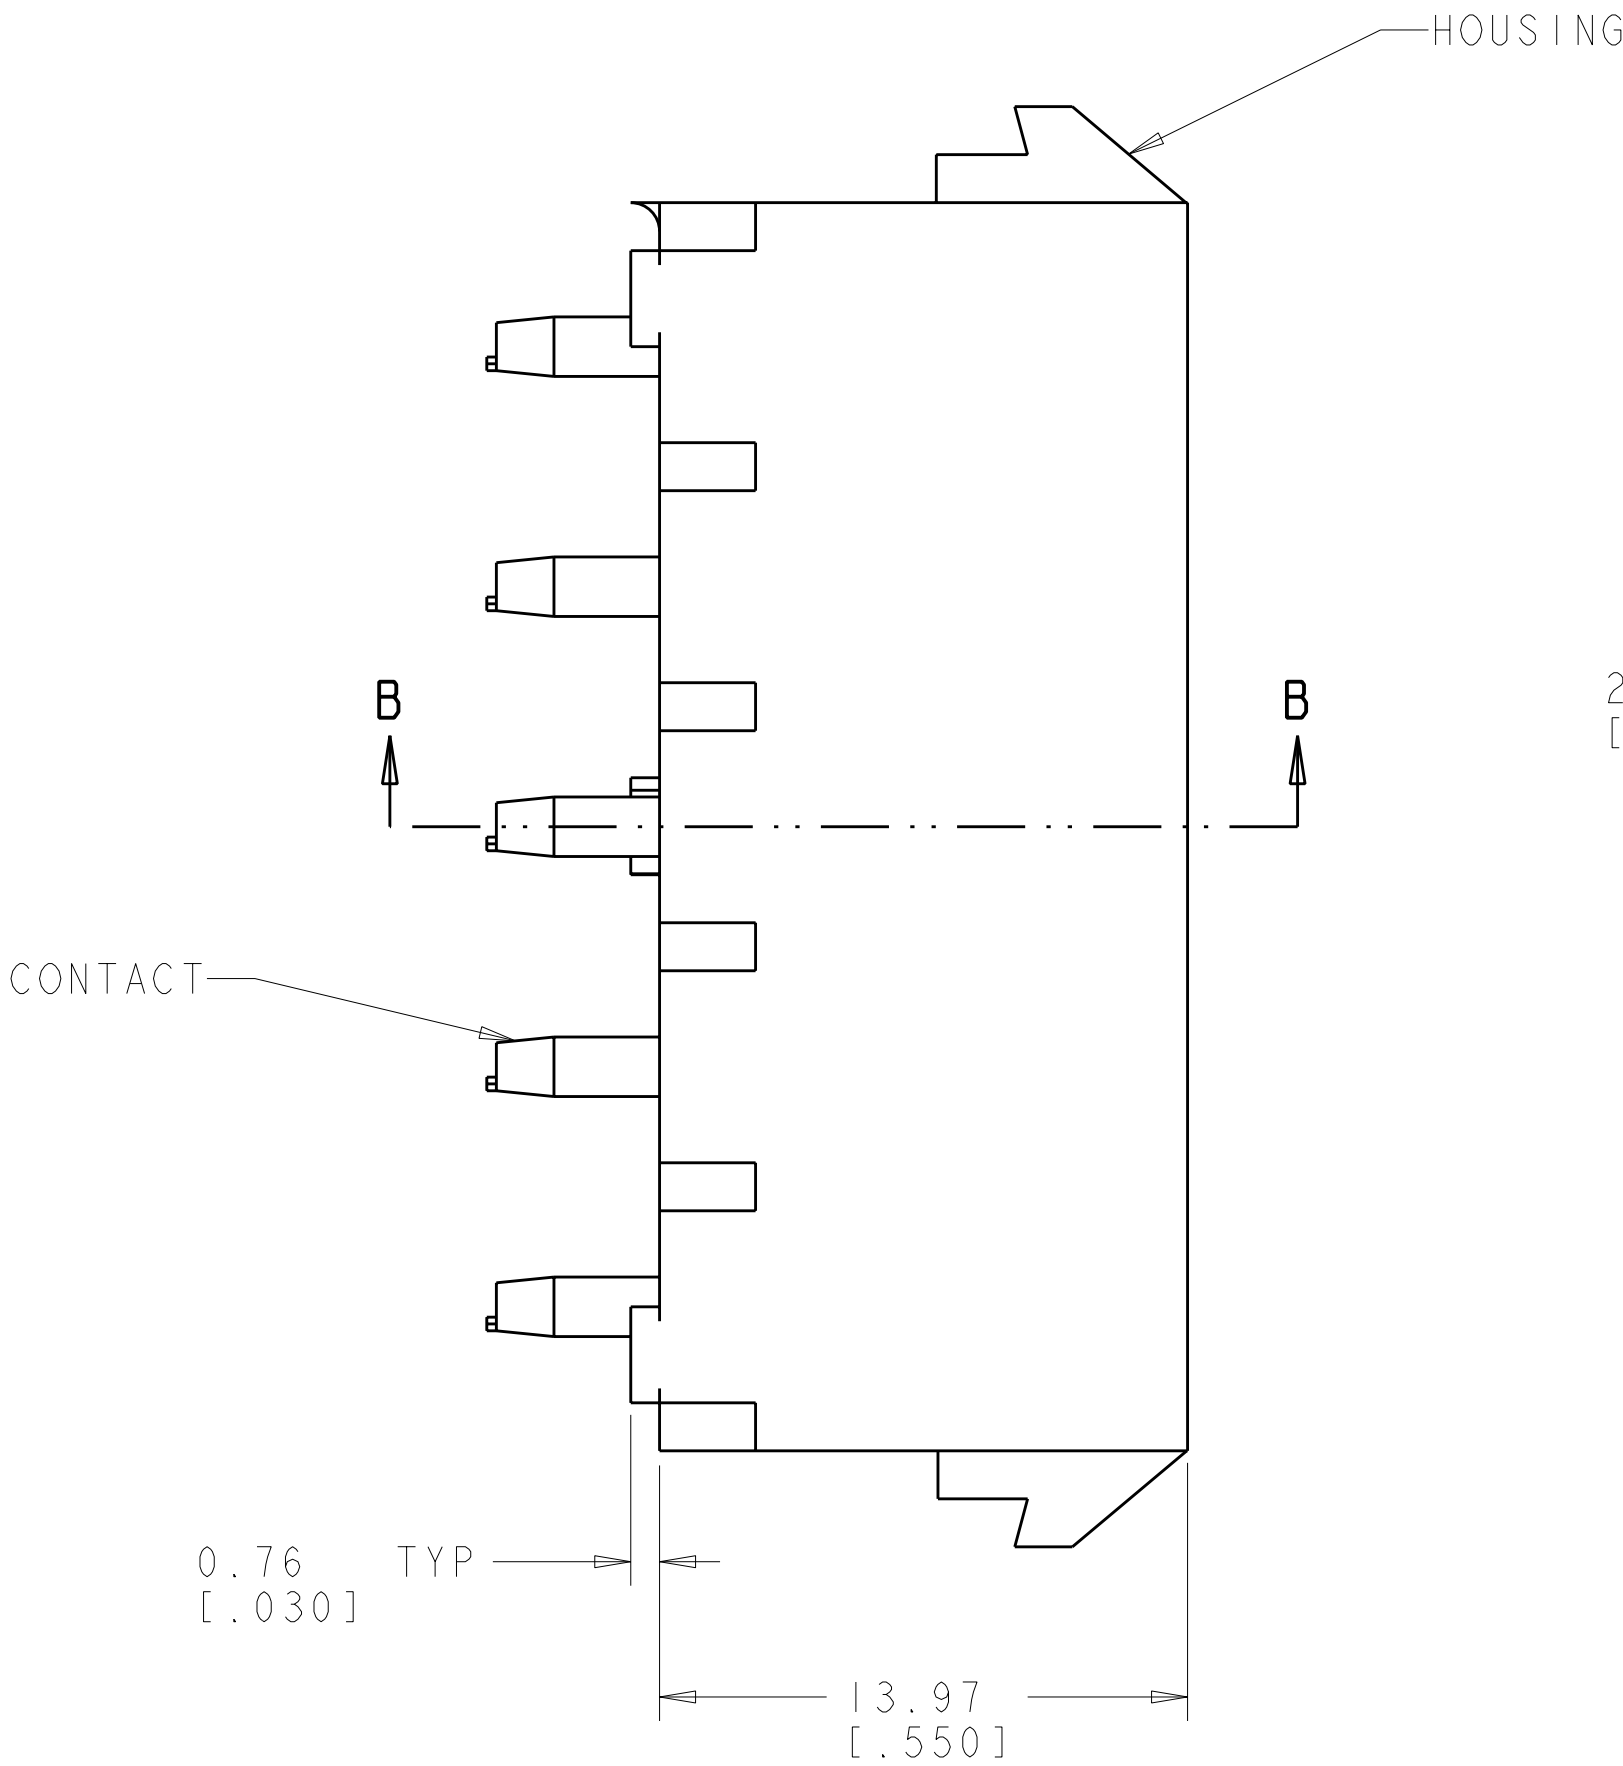

SECTION A-A

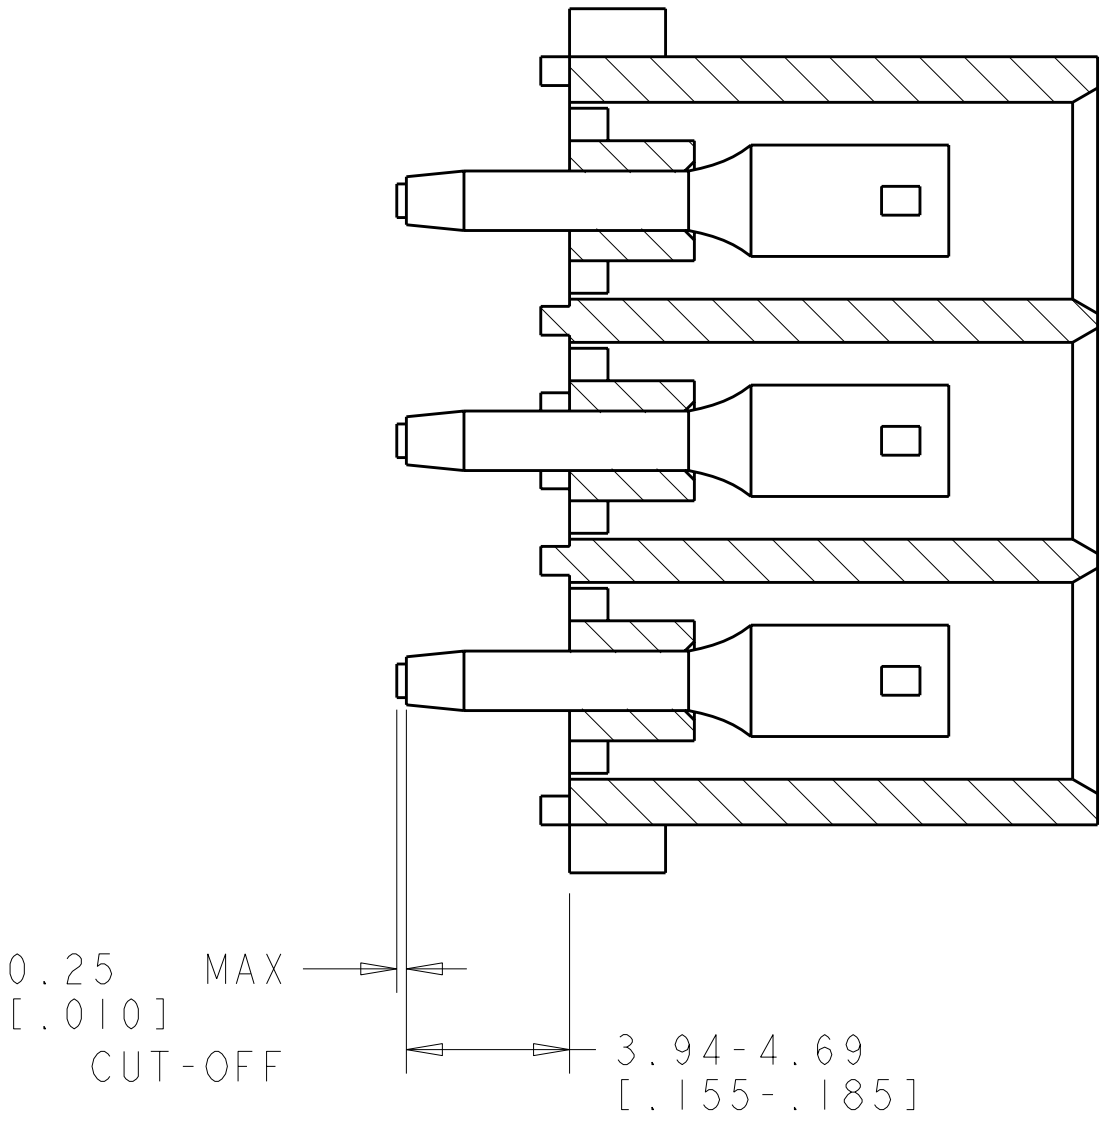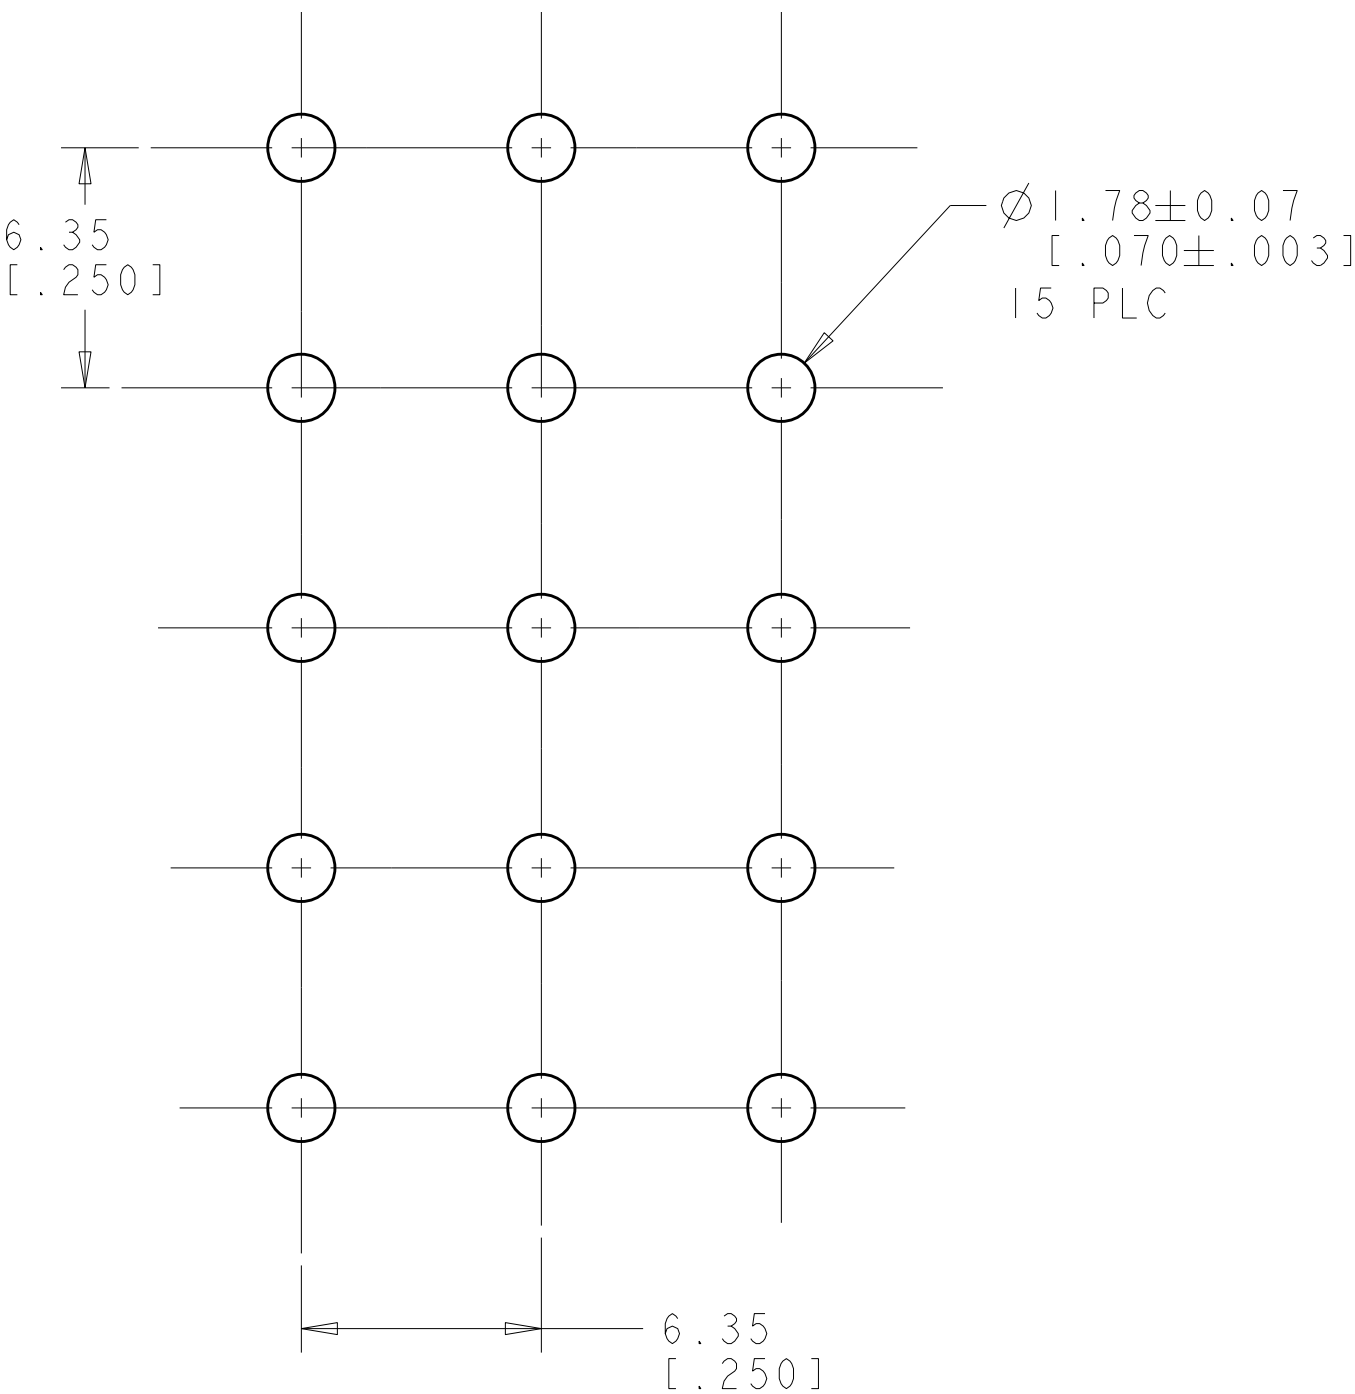

SECTION B-B

1586683-5 SHOWN

15	PHOSPOR BRONZE, PRE-TIN	NYLON, UL94V-0, WHITE	1-1586683-5
14	PHOSPOR BRONZE, PRE-TIN	NYLON, UL94V-0, WHITE	1-1586683-4
13	PHOSPOR BRONZE, PRE-TIN	NYLON, UL94V-0, WHITE	1-1586683-3
11	PHOSPOR BRONZE, PRE-TIN	NYLON, UL94V-0, WHITE	1-1586683-1
10	PHOSPOR BRONZE, PRE-TIN	NYLON, UL94V-0, WHITE	1-1586683-0
9	PHOSPOR BRONZE, PRE-TIN	NYLON, UL94V-0, WHITE	1586683-9
5	PHOSPOR BRONZE, PRE-TIN	NYLON, UL94V-0, WHITE	1586683-5
SOCKET NO OMITTED PIN CONTACT MATERIAL AND FINISH		HOUSING MATERIAL AND COLOR	PART NUMBER

RECOMMENDED MOUNTING HOLE PATTERN
FOR 1.57 [0.062] THICK P.C. BOARD
HOLE THAT CORRESPONDS TO REMOVED
CONTACT CAN BE OMITTED

METRIC

DIMENSIONS: mm [INCHES]		TOLERANCES UNLESS OTHERWISE SPECIFIED:		DWN R. WHITAKER 04MAY2005		Tyco Electronics Harrisburg, PA 17105-3608	
9 PLC ±		0.13 (0.005)		CHK S. RIDGILL 04MAY2005		NAME SOCKET HEADER ASSEMBLY, 15 CIRCUIT, SELECTIVELY LOADED, UNIVERSAL MATE-N-LOK (TM)	
3 PLC ±		0.13 (0.005)		APVD S. RIDGILL 04MAY2005		SIZE CAGE CODE DRAWING NO	
5 PLC ±		0.13 (0.005)		PRODUCT SPEC		RESTRICTED TO	
4 PLC ±		0.13 (0.005)		APPLICATION SPEC		A1 00779 C=1586683	
FINISH		SEE TABLE		WEIGHT		SCALE 5:1 SHEET 1 OF 1 REV A1	
MATERIAL		SEE TABLE		CUSTOMER DRAWING			