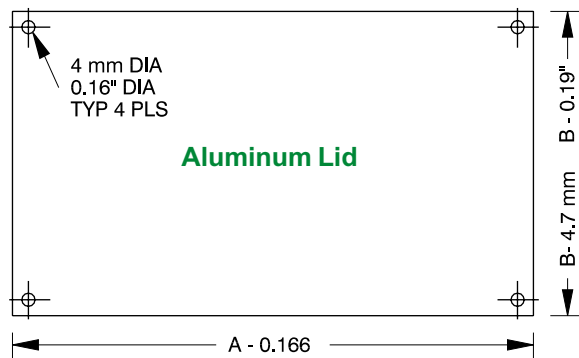**Plastic**

Molded in Flame
Retardant ABS

KEY FEATURES

- Desk top electronic instrument enclosure, ideally suited for mounting printed circuit boards.
- Molded in fire retardant ABS plastic (material carries a UL flammability rating of 94V-0).
- Two piece construction. Integral card guides accept 1.5 mm (0.062") P.C. cards. 0.20" diameter stand off bosses in the base for supporting various subassemblies.
- Integral brass bushings with four M3 x 0.5" x 8 mm (0.31") Philips pan head machine screws hold recessed panel into sloping front of case.
- 1.01 mm (0.04") aluminum panel with paper on one side.
- Four self-adhesive feet included. Stocked in black and grey.

Part Number		Units	Dimensions					
Black	Grey		A	B	C	D	E	R
1595CBK	**1595CGY**	inch	6.35	3.78	2.28	2.52	4.66	0.63
		mm	161	96	58	64	118	15.9
1595EBK	**1595EGY**	inch	8.47	5.12	2.95	3.23	6.78	1.00
		mm	215	130	75	82	72	25.4

NOTES: - Average wall thickness: 0.1" (2.5 mm)

ACCESSORIES

*4 mm DIA
0.16" DIA
TYP 4 PLS*

Aluminum Lid

B - 0.19"
B - 4.7 mm

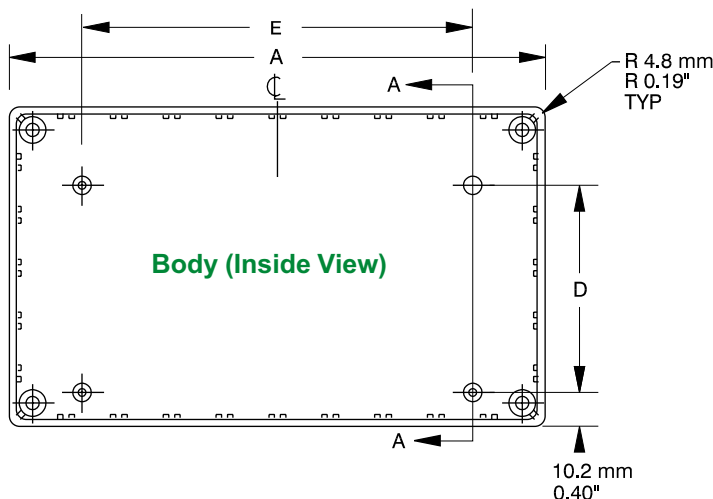A - 0.166

Replacement Lid Screws
Machine screws for aluminum lid of 1595 series
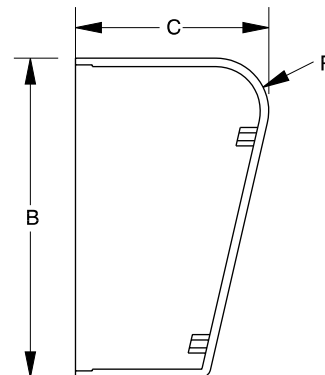M3 - 0.5" x 8 mm
1595MS100 - Package of 100

Accessory Internal Boss Screws
Self-tapping type screws for 1595 series - #6 x 0.25" (6.4 mm)
1598ATS100 - Package of 100

E
A
Ç
A

R 4.8 mm
R 0.19"
TYP

Body (Inside View)

D

A

10.2 mm
0.40"

C

R

B

Section A-A