


SPECIFICATION CONTROL DRAWING



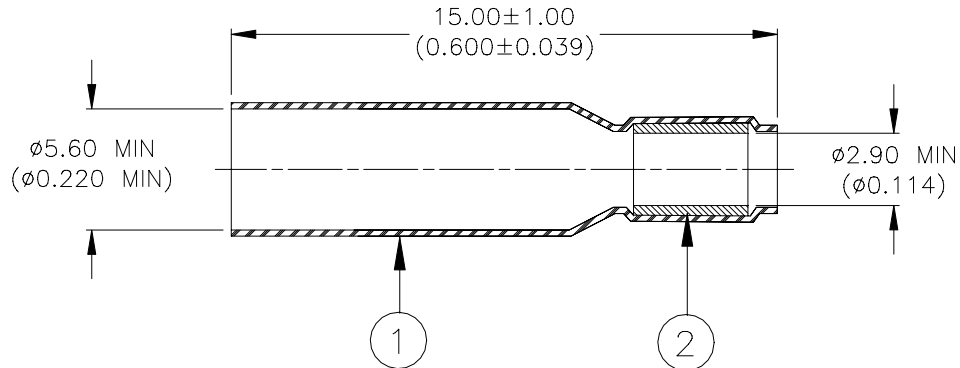

MATERIALS

1. INSULATION SLEEVE: Heat-shrinkable, transparent blue, radiation cross-linked modified polyvinylidene fluoride.
2. SEALING RING: Thermally stabilized thermoplastic.

APPLICATION

1. This device is used to cover a stub splice. It is suitable for crimps from 22AWG to 14AWG.
2. The recommended heating tool is the CV-1983 fitted with PR25 reflector.

 307 Constitution Drive Menlo Park, CA 94025, USA			TITLE: SEALING SLEEVE			
Unless otherwise specified dimensions are in millimeters. Inches dimensions are in between brackets.			DOCUMENT NO.: B-006-04			
TOLERANCES: 0.00 N/A 0.0 N/A 0 N/A	ANGLES: N/A ROUGHNESS IN MICRON	Tyco Electronics reserves the right to amend this drawing at any time. Users should evaluate the suitability of the product for their application.	DCR NUMBER: D010423	REPLACES: N/A		
DRAWN BY: M. FORONDA	DATE: 10-Jul-01	PROD. REV. D	DOC ISSUE: 1	SCALE: None	SIZE: A	SHEET: 1 of 1

If this document is printed it becomes uncontrolled. Check with the web for the latest revision.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[B-006-04](#)