

4

3

2

1

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION DEC. 2005.
COPYRIGHT 2005 BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC		DIST		REVISIONS			
P	LTR	DESCRIPTION		DATE	OWN	APVD	
C		ECR-05-017969		15DEC05	JMS	FWK	

NOTES:

△ PACK IN ACCORDANCE WITH AMP SPEC 107-3275

△ 100 TRAY PACK IN ACCORDANCE WITH AMP SPEC 107-3275

△ Ag PLATING

4 ELECTRICAL CHARACTERISTICS



FREQUENCY RANGE: DC - 11 GHz
NOMINAL IMPEDANCE: 50 Ohm
INSULATION RESISTANCE: 5000 MOhm
WORKING VOLTAGE: 500 Volts RMS at Sea Level
DIELECTRIC WITHSTAND VOLTAGE: 1500 Volts RMS Max
CONTACT RESISTANCE: 1.50 mOhm Max
CENTRE CONTACT: 1.00 mOhm Max
OUTER CONTACT: 0.20 Max
INSERTION LOSS db:

5 MECHANICAL CHARACTERISTICS

MOUNT NUT RECOMMENDED TORQUE: 2.5N
DURABILITY: 500 Cycles Min

6 ENVIRONMENTAL CHARACTERISTICS

OPERATING TEMPERATURE: -65 to +165 DegC

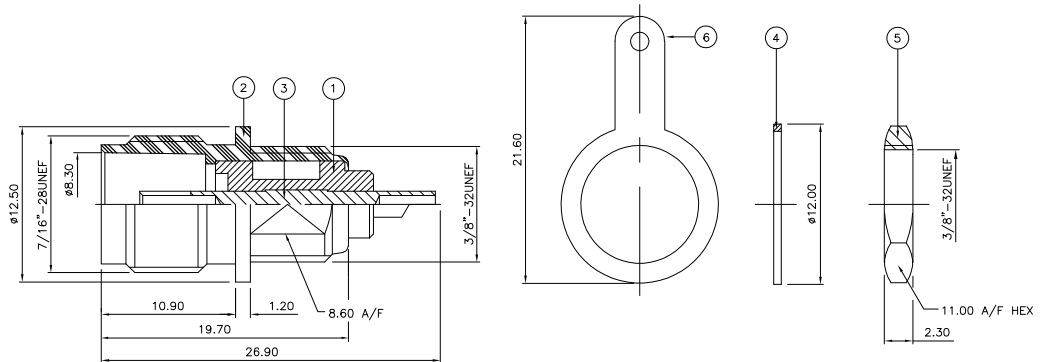

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:		TOLERANCES UNLESS OTHERWISE SPECIFIED:	
mm			
		0 PLC	±
		1 PLC	±
		2 PLC	±
		3 PLC	±
		4 PLC	±
		ANGLES	±
MATERIAL		FINISH	
SEE TABLE		-	

OWN	J. SANDWELL	15DEC05
CHK	S. PARLOW	15DEC05
APVD	F. WHEELER-KING	15DEC05
PRODUCT SPEC		
APPLICATION SPEC		
WEIGHT		
CUSTOMER DRAWING		

	1	1	BRASS	△	SOLDER TAG	6
	1	1	BRASS	△	HEX NUT	5
	1	1	BRASS	△	WASHER	4
	1	1	BRASS	△	CONTACT	3
	1	1	BRASS	△	BODY	2
	1	1	TEFLON	△	INSULATION	1
	6--0	1--0				

QUANTITY PER ASSY		PARTS LIST	
TNC BULKHEAD SOCKET FRONT MOUNT 50 & 75 OHM + TAG			
SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A3	00779	C=1337469	-
SCALE		SHEET	1 of 1
NTS		REV	C