



SIZE	DIM H	DIM J	DIM K	DIM L
2X5	.275/6.99	.200/5.08	.372/9.45	.320/8.13
2X10	.525/13.34	.450/11.43	.622/15.80	.570/14.48
2X15	.775/19.68	.700/17.78	.872/22.15	.820/20.83
2X20	1.025/26.03	.950/24.13	1.122/28.50	1.070/27.18
2X25	1.275/32.38	1.200/30.48	1.372/34.85	1.320/33.53
2X30	1.525/38.74	1.450/36.83	1.622/41.20	1.570/39.88
2X35	1.775/45.08	1.700/43.18	1.872/47.55	1.820/46.23
2X40	2.025/51.43	1.950/49.53	2.122/53.90	2.070/52.58
2X45	2.275/57.78	2.200/55.88	2.372/60.25	2.320/58.93
2X50	2.525/64.14	2.450/62.23	2.622/66.60	2.570/65.28

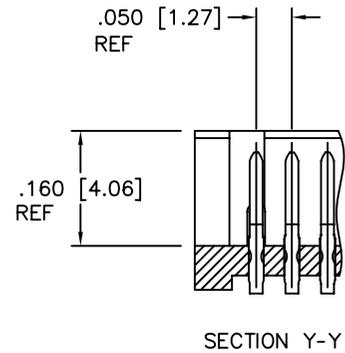

mat'l. code		surface		tolerance	projection	product family		
-		ISO 1302 ✓		ISO 406	INCH/MM	RIBCAGE		
		tolerances unless otherwise specified		ISO 1101				
ltr	ecn	no	dr	date	linear	title		
B						RIBCAGE III SMT VERT. HEADER ASS'Y		
					angles	scale 3:1	dwg no	
					.XX±.01/0.3			sheet 2 of 3
					±2'			size
							10124055	
					dr	GM SUN	2013-01-15	
					enr	GM SUN	2013-01-15	
					chr	RICK BIAN	2013-01-15	
					app	RICK BIAN	2013-01-15	
sheet index	revision sheet						type	
							Product Customer Drawing	

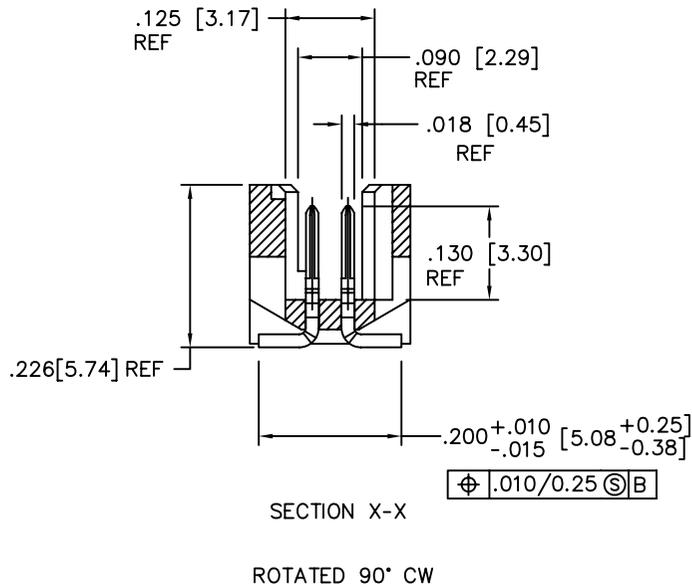


Copyright FCJ




NOTES:

- 10124055-01-1XXLF
 - LEAD FREE OPTION (NOTE 11& 13)
 - NUMBER OF POSITIONS (NOTE 2)
- NUMBER OF POSITIONS = 05 THRU 50 IN 5 POS INCREMENTS.
 (EXAMPLE : 105=10 POS., 110=20 POS. ETC.)
- REQUIRED ON -X40,-X45 & -X50 POSITION PARTS ONLY.
- 10124055-01-1XXLF PACKAGING IN TUBES
 10124055-01-1XXTLF PACKAGING IN TAPE AND REEL
- HOUSING MATERIAL :
 GLASS FILLED THERMOPLASTIC FLAME RETARDANT PER UL 94V-0.
 COLOR : NATURAL
- TERMINAL PLATING :
 30u" GOLD OVER 50u" NI ON CONTACT ZONES.
 GOLD FLASH OVER 50u" Ni ON OTHERWISE ALL ZONES.
- MOLDING FLOW RESTRICTOR QUANTITY AND LOCATION IS
 MANUFACTURING OPTION.
- VACUUM CAP SLOT REQUIRED ON ALL SIZES, SLOT MAY
 BE LOCATED ON OPPOSITE SIDE FOR 2 X 5.
- NOT AVAILABLE IN TAPE AND REEL.
- ADD LF SUFFIX AT THE END OF PART NUMBER FOR LEAD FREE OPTION.
- THE HOUSING WILL WITHSTAND EXPOSURE TO 260°C PEAK TEMPERATURE
 FOR 20 SECONDS IN A CONVECTION, INFRA-RED OR VAPOR PHASE REFLOW
 OVEN. SEE APPLICATION NOTE/PROCEDURES IF THEY ARE AVAILABLE.
- THIS PRODUCT MEETS EUROPEAN UNION DIRECTIVES AND OTHER
 COUNTRY REGULATION AS DESCRIBED IN GS-22-008.
- PRODUCT SPECIFICATION SEE BUS-12-087.

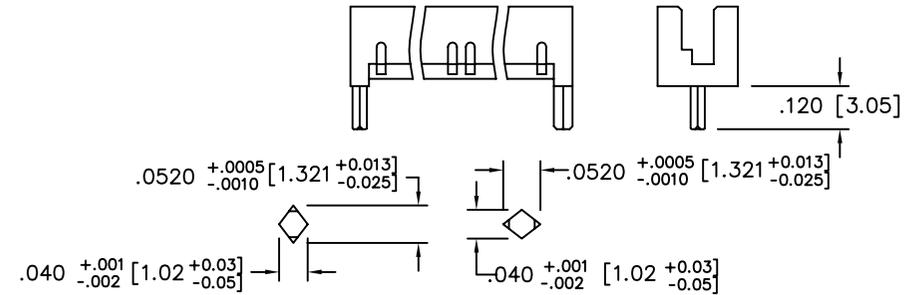

LOCATOR/HOLDDOWN VARIATIONS

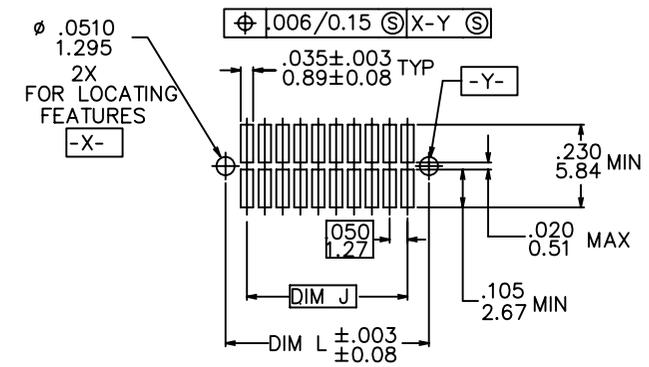

RECOMMENDED PCB MOUNTING PAD PATTERN

mat'l. code		surface		tolerance	projection	product family	
-		ISO 1302 ✓		ISO 406	INCH/MM	RIBCAGE	
		tolerances unless otherwise specified		ISO 1101			
ltr	ecn	no	dr	date	title		
B					RIBCAGE III SMT VERT. HEADER ASS'Y		
		angles	linear	$.XX \pm .01/0.3$	scale 3:1		
				$.XXX \pm .005/0.13$			
				$\pm 2'$			
		dr	GM	SUN	2013-01-15	dwg no	
		enr	GM	SUN	2013-01-15	sheet 3 of 3	
		chr	RICK	BIAN	2013-01-15	size	
		app	RICK	BIAN	2013-01-15	A3	
sheet		revision		type			
index		sheet		Product Customer Drawing			



Copyright FCI