







DIMENSIONS IN MILLIMETERS. DO NOT SCALE PRINT


PRINT DIST

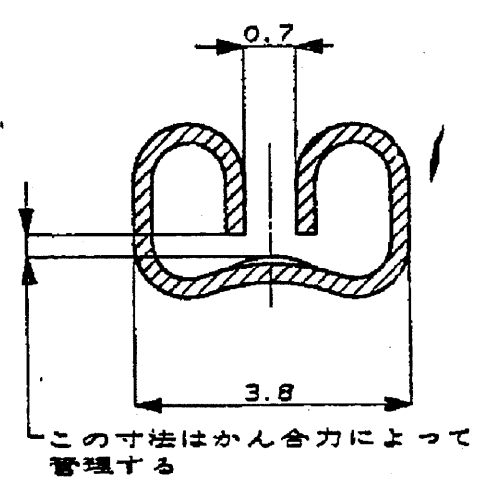

断面 C-C
(尺度10-1)

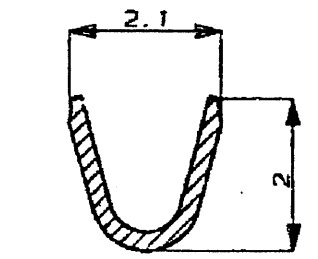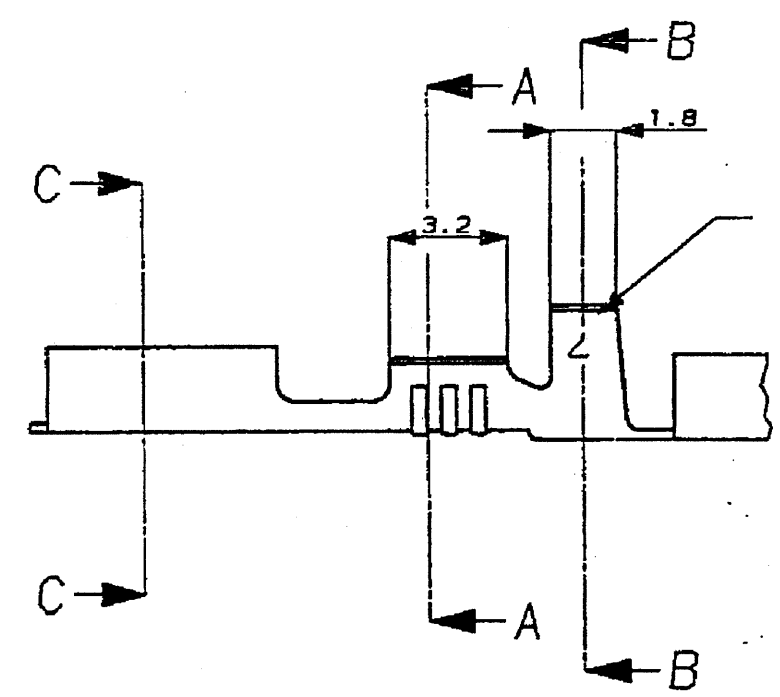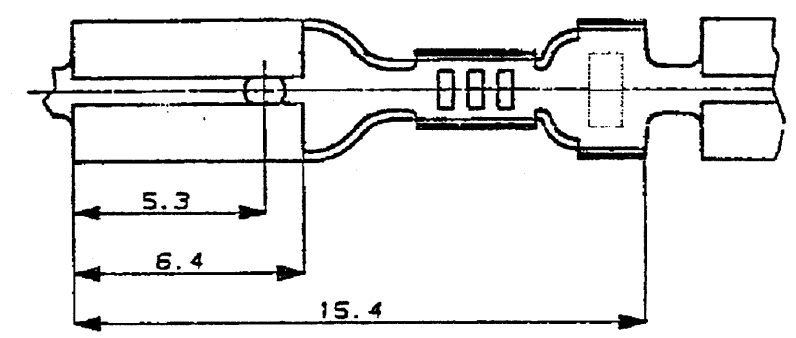

断面 A-A
(尺度10-1)

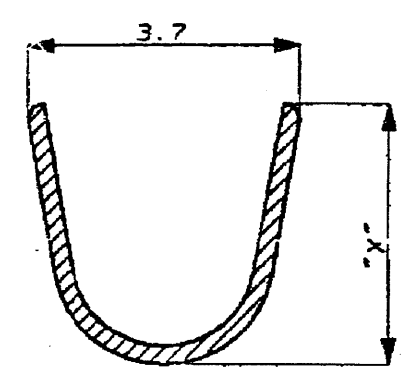

断面 B-B
(尺度10-1)

注記

- 1 製品規格NO. 108-S002
- 2 かん合するファストンタブの詳細は CP063-045Jの図面を参照の事
- ③ OBSOLETE

3.3	0.5t	170048-7	錫メッキ	リン青銅0.25t	170043-7
3.6	0.8t	-#-	錫メッキ	黄銅0.25t	170056-4
↑	0.8t	-#-	-#-	↑	-3
↓	0.7t	-#-	錫メッキ	↓	-2
↓	0.7t	-#-	-#-	↓	③ 170056-1
3.6	0.5t	-#-	錫メッキ	↓	1-170043-2
3.3	↑	170043-6	錫メッキ	黄銅0.25t	↑ -6
3.6	↓	③ 170048-5	-#-	錫メッキ黄銅0.25t	-5
↑	↓	170048-4	錫メッキ	リン青銅0.25t	-4
↓	↓	170048-2	錫メッキ	黄銅0.25t	↓ -2
3.6	0.5t	170048-1	-#-	黄銅0.25t	170043-1
"x"寸法	かん合端子 タブ厚(±0.025)	バフ状端子型番 (レベルはブリタリン)		仕上	材料
					連続状端子型番



WIRE RANGE 0.20-0.56 (AWG#24-20)		INSULATION DIA 2.0-3.0 mmφ		NAME (.110 SERIES FASTON RECEPTACLE) .110シリーズファストンリセプタクル	
材料 表参照		仕上げ 表参照		公差 ±0.4 ±1°	SIZE LOC NUMBER A3 J C-170043
SCALE 5-1		REV. H3		SHEET 1 OF 1	

H3	REVISED PER ECR-16-012887	K.S	T.D	08SEP 2016	DR. H.B. Brown 9/1/86	DE. H.B. Brown 9/1/86
LTR	REVISION RECORD	DR	CHK	DATE	CHK. H.B. Brown 9/1/86	APP. H.B. Brown 9/1/86