



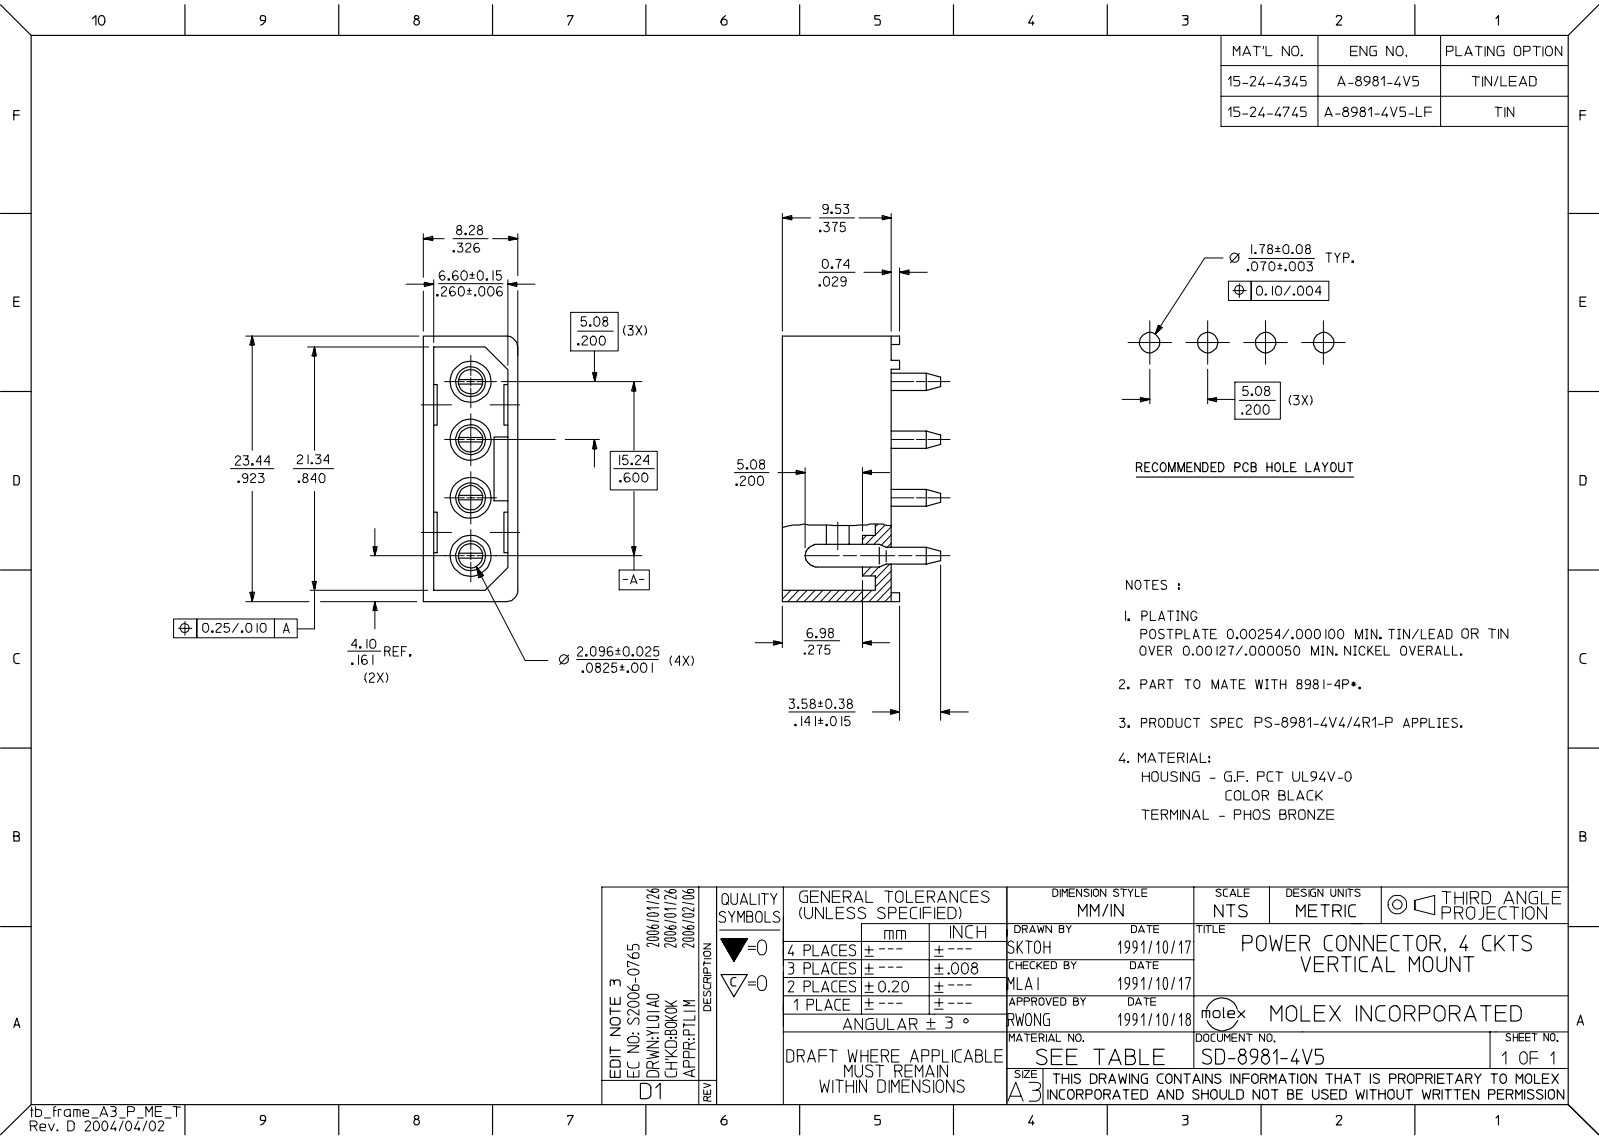

MAT'L NO.	ENG NO.	PLATING OPTION
15-24-4345	A-8981-4V5	TIN/LEAD
15-24-4745	A-8981-4V5-LF	TIN



RECOMMENDED PCB HOLE LAYOUT

- NOTES :
1. PLATING
POSTPLATE 0.00254/.000100 MIN. TIN/LEAD OR TIN
OVER 0.00127/.000050 MIN. NICKEL OVERALL.
 2. PART TO MATE WITH 8981-4P*.
 3. PRODUCT SPEC PS-8981-4V4/4R1-P APPLIES.
 4. MATERIAL:
HOUSING - G.F. PCT UL94V-0
COLOR BLACK
TERMINAL - PHOS BRONZE

QUALITY SYMBOLS		GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM/IN		SCALE NTS	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION	
▽=0		mm		INCH		DRAWN BY SKTOH		DATE 1991/10/17	
▽=0		4 PLACES ± ---		± ---		CHECKED BY MLAI		DATE 1991/10/17	
		3 PLACES ± ---		± .008		APPROVED BY RWONG		DATE 1991/10/18	
		2 PLACES ± 0.20		± ---		MATERIAL NO. SEE TABLE		DOCUMENT NO. SD-8981-4V5	
		1 PLACE ± ---		± ---		SIZE A3		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION	
		ANGULAR ± 3 °							
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS									
EDIT NOTE 3		EC NO. S2006-0765		2006/01/26		DRAWN BY SKTOH		DATE 1991/10/17	
D1		CHKD BY MLAI		2006/01/26		APPR. BY MLAI		DATE 1991/10/17	
		APPR. BY MLAI		2006/02/06					