

4

3

2

1

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

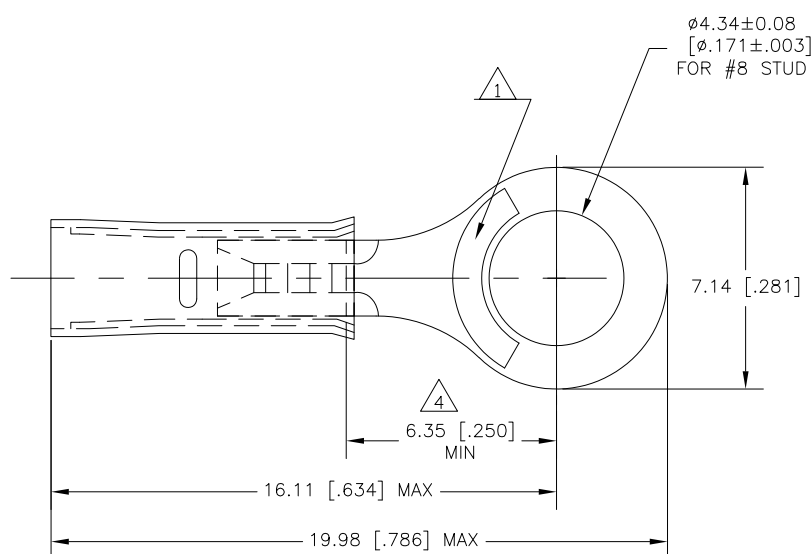
ALL RIGHTS RESERVED.

COPYRIGHT BY TYCO ELECTRONICS CORPORATION.

LOC
GDIST
14

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
02		REV PER ECR 07-020486	28AUG07	JR	TM

AMP
WIRE RANGE22 AWG
SOLID OR STRANDED

- 1 STAMP AMP 22, LOCATE APPROX AS SHOWN.
- 2 WIRE INSULATION DIA IS 0.9-2.5 [.035-.100]
- 3 TONGUE MATERIAL THK IS 0.79±0.05 [.031±.002]
- 4 DIMENSION APPLIES FROM EDGE OF METAL WIRE BARREL TO CENTER OF STUD HOLE.
- 5 MATERIAL: BODY-COPPER PER ASTM B-152
SLEEVE-NYLON, BLACK
- 6 FINISH: BODY-TIN PLATE PER ASTM B-545
- 7 MAX RECOMMENDED OPERATING 105°C
- 8 VOLTAGE RATING 300V MAX
- 9 CIRCULAR MIL AREA 0.26-0.41mm² [509-810] CMA.

500	LOOSE PIECE	151440
QTY	PACKAGE TYPE	PART NO

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:	TOLERANCES UNLESS OTHERWISE SPECIFIED:
INCHES	
0 PLC	± .
1 PLC	± .
2 PLC	± .
3 PLC	± .005
4 PLC	± .
ANGLES	± 5°
MATERIAL	FINISH
5	6

DWN jr ruth	09MAY06	Tyco Electronics Corporation Harrisburg, PA 17105-3608	
CHK T MICHELUTTI	09MAY06	NAME	
APVD T MICHELUTTI	09MAY06	TERMINAL, RING TONGUE, PIDG, WIRE SIZE: 22 AWG	
PRODUCT SPEC		-	
APPLICATION SPEC		-	
WEIGHT		-	
CUSTOMER DRAWING		SIZE A3	CAGE CODE 00779
		DRAWING NO 151440	RESTRICTED TO -
		SCALE 8:1	SHEET 1 OF 1
		REV 02	

AMP 1470-19 REV 31MAR2000