

4


3

2

1

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT - BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS				
P	LTR	DESCRIPTION	DATE	DWN	APVD	
G	14					
	C1	REV PER ECR 07-015095	25JUN07	JR	TM	

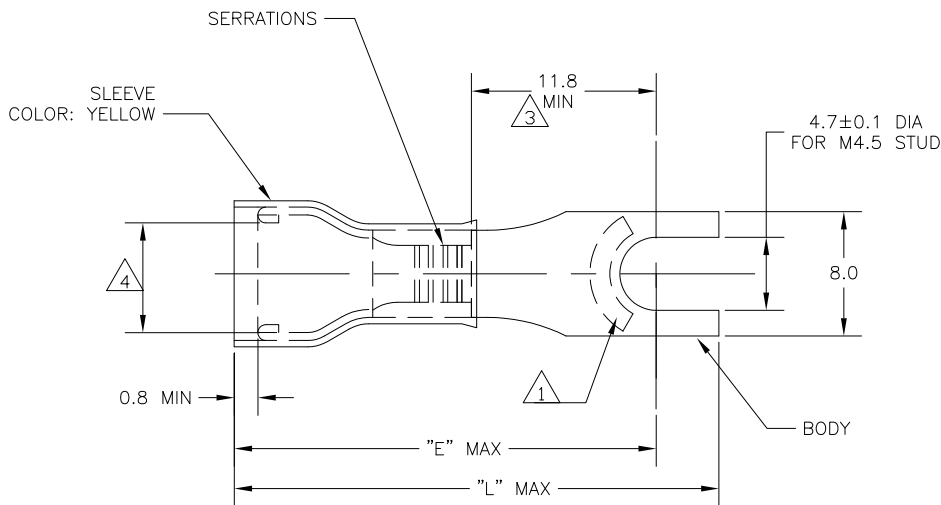

- 1 STAMP "AMP 12-10*", LOCATION APPROX AS SHOWN.
- 2 TONGUE THICKNESS IS 1.0±0.05
- 3 APPLIES TO EDGE OF METAL WIRE BARREL TO CENTER OF STUD HOLE.
- 4 WIRE INSULATION DIA RANGE
- 5 BODY - COPPER PER ASTM B-152
SLEEVE - COPPER PER ASTM B-152
INSULATION - NYLON
- 6 BODY - TIN PL PER ASTM B-545
SLEEVE - TIN PL PER ASTM B-545
INSULATION - COLOR - YELLOW
- 7 105°C MAX OPERATING TEMPERATURE.
- 8 300 VOLT MAX
- 9 2.62-6.64mm² [5,180 - 13,100 CMA]
SOLID OR STRANDED
- 10 OBSOLETE WITHOUT REPLACEMENT

4.3 - 7.6	29.2	33.5	500	LOOSE PIECE	130496 - 1
3.8 - 6.4	26.9	31.2	500	LOOSE PIECE	130496
4	"E"	"L"	QTY	PACKAGE TYPE	PART NO
THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN jr_ruth 12APR07		Tyco Electronics Corporation Harrisburg, PA 17105-3608	
DIMENSIONS: mm INCHES:		CHK T MICHELUTTI 12APR07		NAME	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD T MICHELUTTI 12APR07		TERMINAL, SPADE, RECTANGULAR TONGUE, PIDG, WIRE SIZE 12-10	
0 PLC ± -		PRODUCT SPEC		SIZE	
1 PLC ± 0.2		APPLICATION SPEC		CAGE CODE	
2 PLC ± -		WEIGHT		DRAWING NO	
3 PLC ± -		A3		00779	
4 PLC ± -		CUSTOMER DRAWING		C=130496	
ANGLES ± 5°		SCALE		SHEET	
MATERIAL		4:1		1 OF 1	
FINISH		REV		C1	

AMP 1470-19 REV 31MAR2000