

SACC-DSIV-M 8FS-3CON-L 90

Order No.: 1524788

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1524788>

Sensor/actuator flush-type socket, 3-pos., M8, rear/screw mounting
with M8 thread, with polarity protection and angled solder connection

Commercial data

EAN	4017918953881
Pack	20 pcs.
Customs tariff	85366990
Weight/Piece	0.00508 KG
Catalog page information	Page 24 (PC-2009)

Product notes

WEEE/RoHS-compliant since:
03/22/2006



[http://
www.download.phoenixcontact.com](http://www.download.phoenixcontact.com)
Please note that the data given
here has been taken from the
online catalog. For comprehensive
information and data, please refer
to the user documentation. The
General Terms and Conditions of
Use apply to Internet downloads.

Technical data**General data**


Nominal current I_N	4 A
Nominal voltage U_N	60 V
Number of positions	3
Volume resistance	$\leq 3 \text{ m}\Omega$
Insulation resistance	$\geq 100 \text{ M}\Omega$

Ambient temperature (operation)	-25 °C ... 85 °C
General characteristics	
Coding	A - standard
Inflammability class acc. to UL 94	HB
Surge voltage category	II
Pollution degree	3
Degree of protection	IP67
Contact material	CuSn
Contact surface material	Au
Contact carrier material	PA 66
Material, knurls	Nickel-plated brass
Sealing material	NBR
Mounting type	Rear mounting, M12 x 1 screw thread with counter nut
Type of connection	Solder pins
Status display	No


Drawings

Drilling diagram

M8 flush-type plug

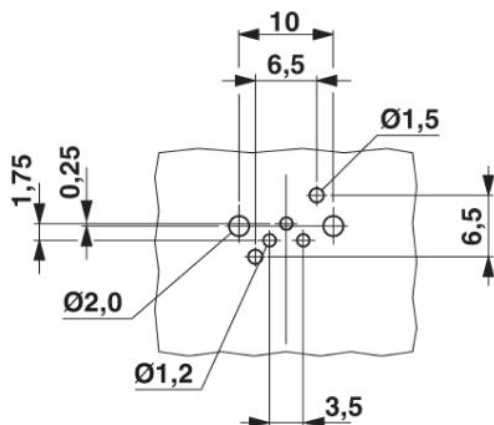


Dimensioned drawing

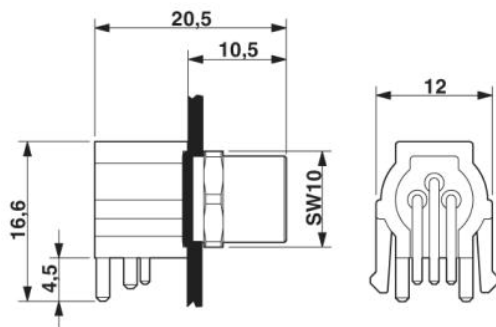

M8 flush-type plug

Schematic diagram

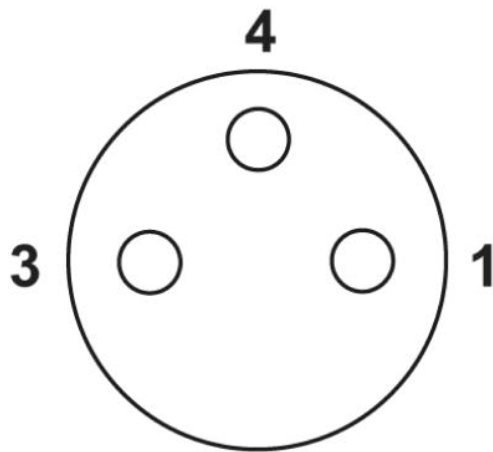

Pin assignment M8 socket, 3-pos., view female side

Address

PHOENIX CONTACT GmbH & Co. KG
Flachsmarktstr. 8
32825 Blomberg, Germany
Phone +49 5235 3 00
Fax +49 5235 3 41200
<http://www.phoenixcontact.com>



© 2009 Phoenix Contact
Technical modifications reserved;