


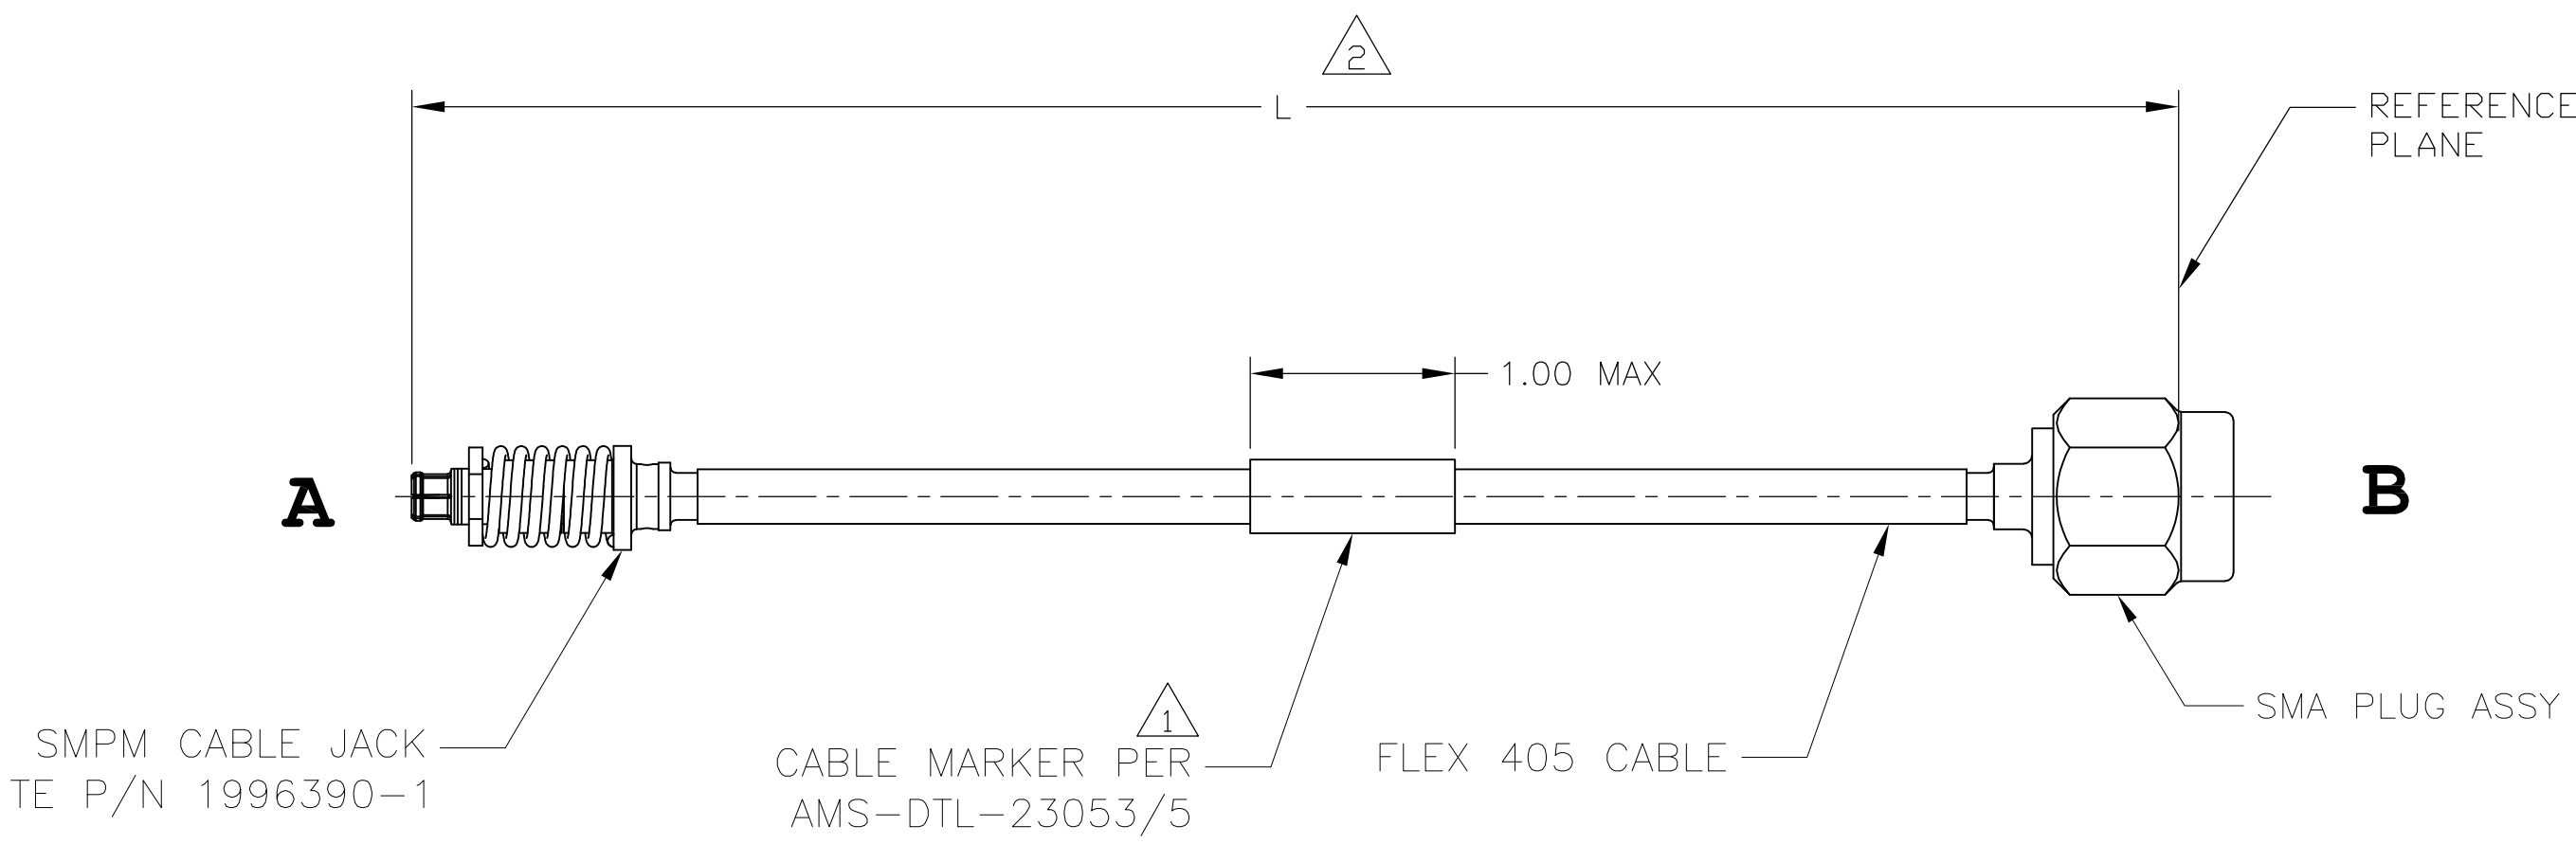

- 1

PART NUMBER, DATE CODE AND "TE" MARKED ON CABLE MARKER.
- 2

LENGTH TOLERANCE ± 0.5%, ± .10 IN. MINIMUM.
3.

VSWR: 1.2 MAX, DC – 10 GHz
1.35 MAX 10–18 GHz

18.00	1-2221289-8
17.00	1-2221289-7
16.00	1-2221289-6
15.00	1-2221289-5
14.00	1-2221289-4
12.00	1-2221289-2
10.00	1-2221289-0
6.00	2221289-6
4.00	2221289-4
3.00	2221289-3
DIM "L"	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN
D.WILSON
25MAY2012

CHK
C.C.THOMAS
6-27-12

APVD
D.WILSON
6-27-12

PRODUCT SPEC

APPLICATION SPEC

WEIGHT

CUSTOMER DRAWING

DIMENSIONS:
INCHES

MATERIAL

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC ± -
1 PLC ± -
2 PLC ± -
3 PLC ± -
4 PLC ± -
ANGLES ± -
FINISH

TE Connectivity

NAME
RF CABLE ASSEMBLIES, SMPM FLOAT MOUNT FEMALE TO SMA STRAIGHT PLUG ON FLEX .086

SIZE
A2

CAGE CODE
00779

DRAWING NO
C=2221289

RESTRICTED TO

SCALE
NTS

SHEET
1 of 1

REV
A