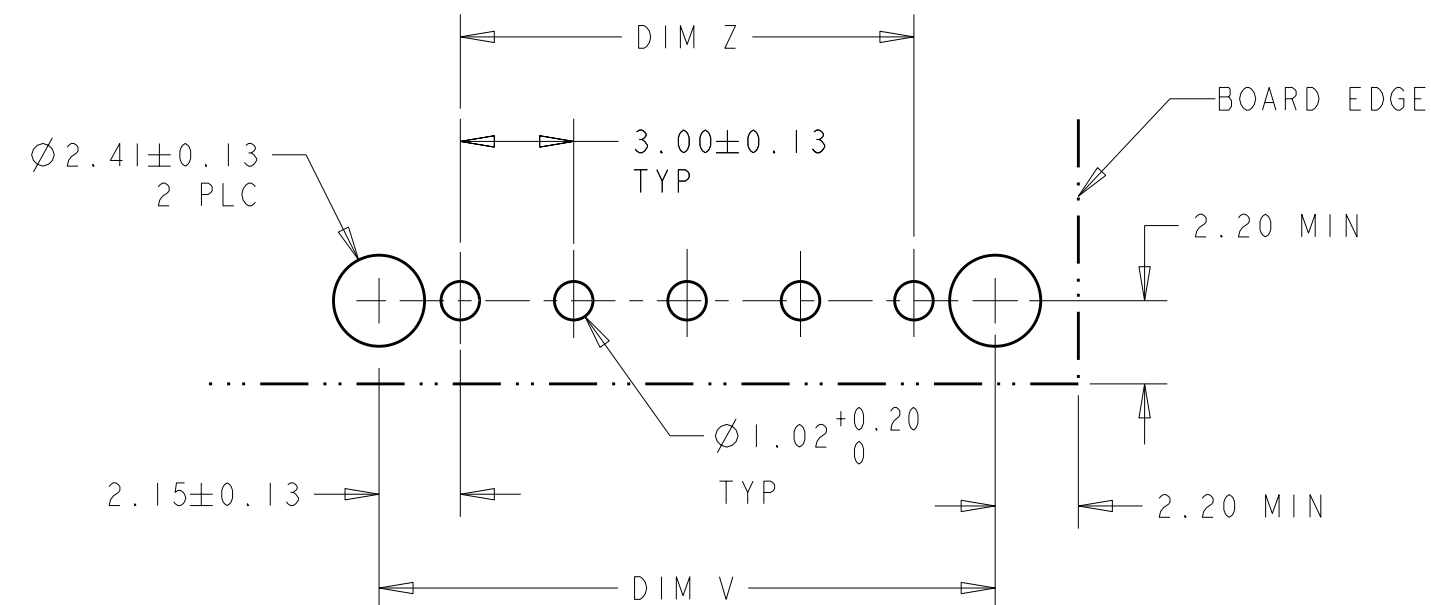
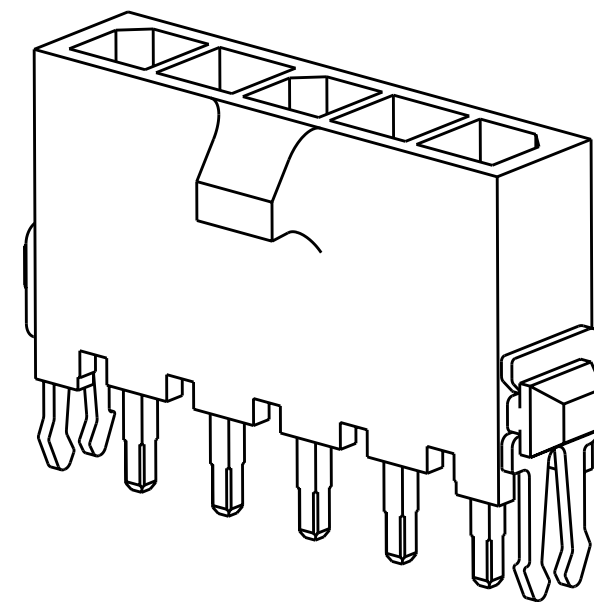
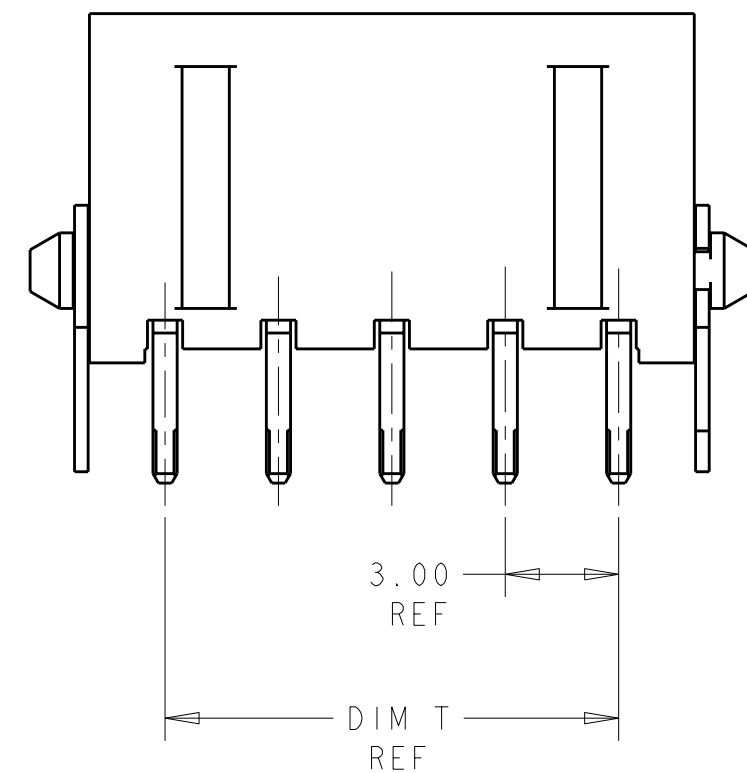
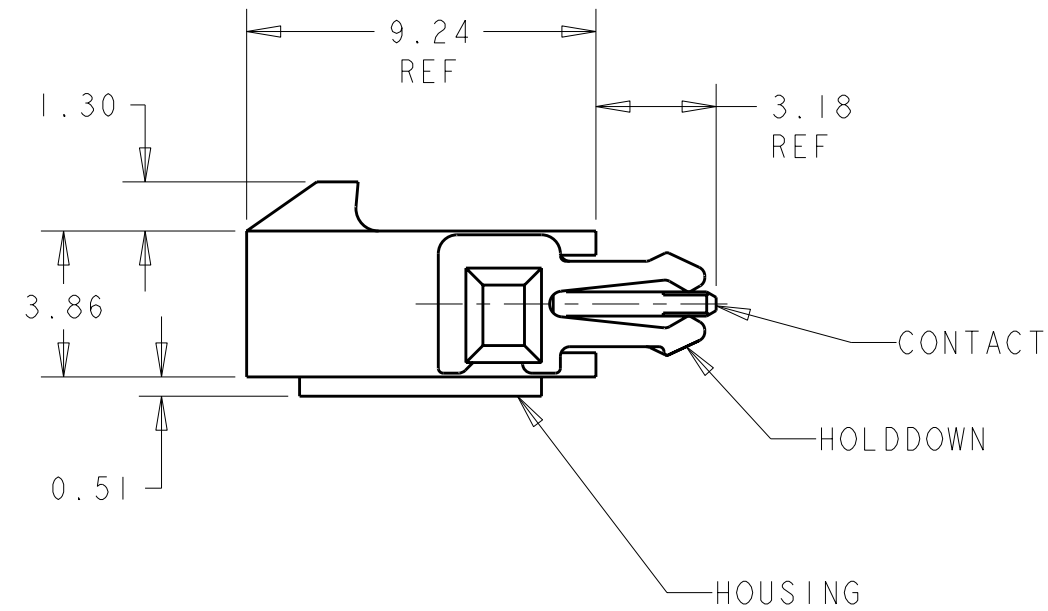
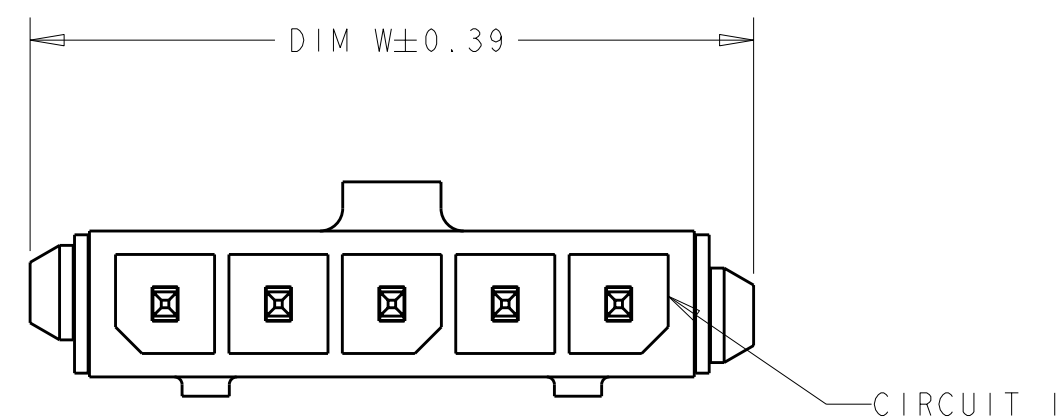
























LOC	DIST	REVISIONS					
CM	00	P	LTR	DESCRIPTION	DATE	OWN	APVD
			A2	REVISED PER ECR-12-007353	18MAY2012	KH	TM






PCB LAYOUT COMPONENT SIDE



- ① MATERIAL: CONTACTS - BRASS
 HOUSING - UL 94V-0 RATED HIGH TEMP NYLON, COLOR BLACK.
 HOLDDOWNS: - PHOSPHOR BRONZE.
- ② PLATING: CONTACTS - 0.76μm MINIMUM GOLD ON MATING END,
 2.54μm MINIMUM TIN LEAD ON SOLDER TAILS, BOTH OVER
 1.27μm MINIMUM NICKEL.
 HOLDDOWNS: 2.54μm MINIMUM MATTE TIN OVER 1.27μm MINIMUM
 NICKEL.
- ④ RECOMMENDED PC BOARD THICKNESS OF 1.57.
- ⑤ PLATING: CONTACTS - 0.76μm MINIMUM GOLD ON MATING END,
 2.54μm MINIMUM MATTE TIN ON SOLDER TAILS, BOTH OVER
 1.27μm MINIMUM NICKEL.
 HOLDDOWNS: 2.54μm MINIMUM MATTE TIN OVER 1.27μm MINIMUM
 NICKEL.

	33.00	37.43	33.00	40.14	12	3-1445094-2
	30.00	34.43	30.00	37.14	11	3-1445094-1
	27.00	31.43	27.00	34.14	10	3-1445094-0
	24.00	28.43	24.00	31.14	9	2-1445094-9
	21.00	25.43	21.00	28.14	8	2-1445094-8
	18.00	22.43	18.00	25.14	7	2-1445094-7
	15.00	19.43	15.00	22.14	6	2-1445094-6
	12.00	16.43	12.00	19.14	5	2-1445094-5
	9.00	13.43	9.00	16.14	4	2-1445094-4
	6.00	10.43	6.00	13.14	3	2-1445094-3
	3.00	7.43	3.00	10.14	2	2-1445094-2
	33.00	37.43	33.00	40.14	12	1-1445094-2
	30.00	34.43	30.00	37.14	11	1-1445094-1
	27.00	31.43	27.00	34.14	10	1-1445094-0
	24.00	28.43	24.00	31.14	9	1445094-9
	21.00	25.43	21.00	28.14	8	1445094-8
	18.00	22.43	18.00	25.14	7	1445094-7
	15.00	19.43	15.00	22.14	6	1445094-6
	12.00	16.43	12.00	19.14	5	1445094-5
	9.00	13.43	9.00	16.14	4	1445094-4
	6.00	10.43	6.00	13.14	3	1445094-3
	3.00	7.43	3.00	10.14	2	1445094-2
FINISH	DIM Z	DIM V	DIM T	DIM W	NO. OF POSN	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN 100CT2000 J. ROOT		 TE Connectivity	
		CHK 17-APR-2001 K. WHITAKER			
DIMENSIONS: mm		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME VERTICAL THRU HOLE HEADER ASSY, 0.76 MIC GOLD CONTACTS, W/THRU HOLE HOLDDOWNS, SGL ROW. MICRO MATE-N-LOK™	
		0 PLC ± 1 PLC ± 2 PLC ±0.20 3 PLC ± 4 PLC ± ANGLES ± FINISH			
MATERIAL		WEIGHT -		RESTRICTED TO -	
		SEE TABLE		SIZE A2 CAGE CODE 00779 DRAWING NO C-1445094	
		CUSTOMER DRAWING		SCALE 5:1 SHEET 1 OF 1 REV A2	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[1445094-3](#)