



0669



0669-0-15-XX-30-XX-10-0

Solder mount in 1,52 min. mounting hole
Also available on 16mm wide carrier tape: 1,700 parts per 330mm reel.
Order as: 0669-0-57-XX-30-XX-10-0


0670



0670-0-15-XX-30-XX-10-0

Solder mount in 1,52 min. mounting hole


0673



0673-0-15-XX-30-XX-10-0

Surface Mount


0666

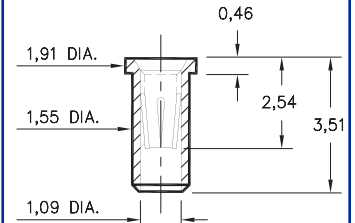

0666-0-15-XX-32-XX-10-0

Solder mount in 1,63 min. mounting hole
Also available on 24mm wide carrier tape: 1,500 parts per 330mm reel.
Order as: 0666-0-57-XX-32-XX-10-0


0341



0341-0-15-XX-30-XX-10-0

Solder mount in 1,85 mounting hole
Also available on 12mm wide carrier tape: 1,400 parts per 330mm reel.
Order as: 0341-0-57-XX-30-XX-10-0


0252



0252-0-15-XX-32-XX-10-0

Hex press-fit in 1,45 plated thru hole


0678



0678-0-15-XX-32-XX-10-0

Press-fit in 1,45 mounting hole


0676

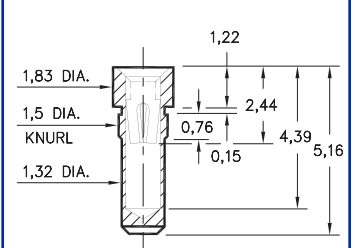

0676-0-15-XX-30-XX-10-0

Press-fit in 1,45 mounting hole


0697



0697-0-15-XX-30-XX-10-0

Press-fit in 1,45 mounting hole


0668



0668-0-15-XX-30-XX-10-0

Press-fit in 1,45 mounting hole

0253/1033



XXX3-0-15-XX-30-XX-10-0

Press-fit in 1,45 mounting hole

Basic Part Number	Length L	Depth N
0253-0	4,39	3,76
1033-0	5,16	4,11

SPECIFICATIONS

SHELL MATERIAL:
Brass Alloy 360, 1/2 Hard

CONTACT MATERIAL:
Beryllium Copper Alloy 172, HT

DIMENSION IN INCHES
TOLERANCES ON:
LENGTHS: $\pm 0,13$
DIAMETERS: $\pm 0,05$
ANGLES: $\pm 2^\circ$

ORDER CODE: XXXX - X - 15 - XX - XX - XX - 10 - 0

BASIC PART #

SPECIFY SHELL FINISH:

- 01 5,08 μ m TIN/LEAD OVER NICKEL
- 80 5,08 μ m TIN OVER NICKEL (RoHS)
- 15 0,25 μ m GOLD OVER NICKEL (RoHS)



SPECIFY CONTACT FINISH:

- 02 2,54 μ m TIN/LEAD OVER NICKEL
- 84 2,54 μ m TIN OVER NICKEL (RoHS)
- 27 0,76 μ m GOLD OVER NICKEL (RoHS)

SELECT CONTACT

#30 or #32 CONTACT (DATA ON PAGES 218 & 219)