

HC-M-KV-Z-M20

Order No.: 1646146

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1646146>

Metal screw connection with strain relief clamp, thread length: 6 mm,
cable sealing area: 7.5 - 15 mm, clamping area: 11 - 17 mm, SW 24,
screw connection: M20

Commercial data

GTIN (EAN)	 4 017918 941284
sales group	D092
Pack	10 pcs.
Customs tariff	74153300
Catalog page information	Page 596 (PC-2011)

Product notes

WEEE/RoHS-compliant since:
05/28/2005



[http://
www.download.phoenixcontact.com](http://www.download.phoenixcontact.com)
Please note that the data given
here has been taken from the
online catalog. For comprehensive
information and data, please refer
to the user documentation. The
General Terms and Conditions of
Use apply to Internet downloads.

Technical data


General data

Cable gland material	Nickel-plated brass
Material, pressure screw	Nickel-plated brass
Cable seal material	Perbunan
Material, O-ring	NBR

Wrench size, union nut	27 mm
Wrench size, support	24 mm
Thread type connection side 1	M20
Conductor sealing range	7.50 mm ... 15.00 mm
Clamping range of the strain relief clip	11.00 mm ... 17.00 mm
Degree of protection	IP65
Color	silver
Ambient temperature (operation)	-20 °C ... 80 °C

Diagrams/Drawings

Dimensioned drawing

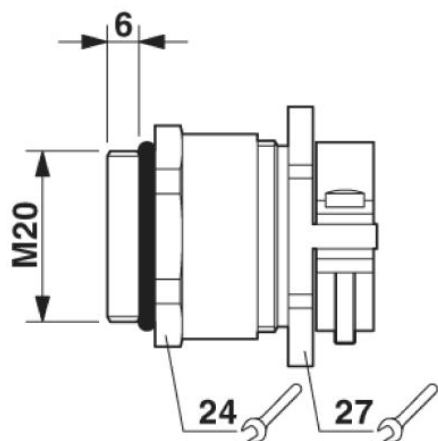

Address

PHOENIX CONTACT Inc., USA
586 Fulling Mill Road
Middletown, PA 17057, USA
Phone (800) 888-7388
Fax (717) 944-1625
<http://www.phoenixcon.com>



© 2011 Phoenix Contact
Technical modifications reserved;