



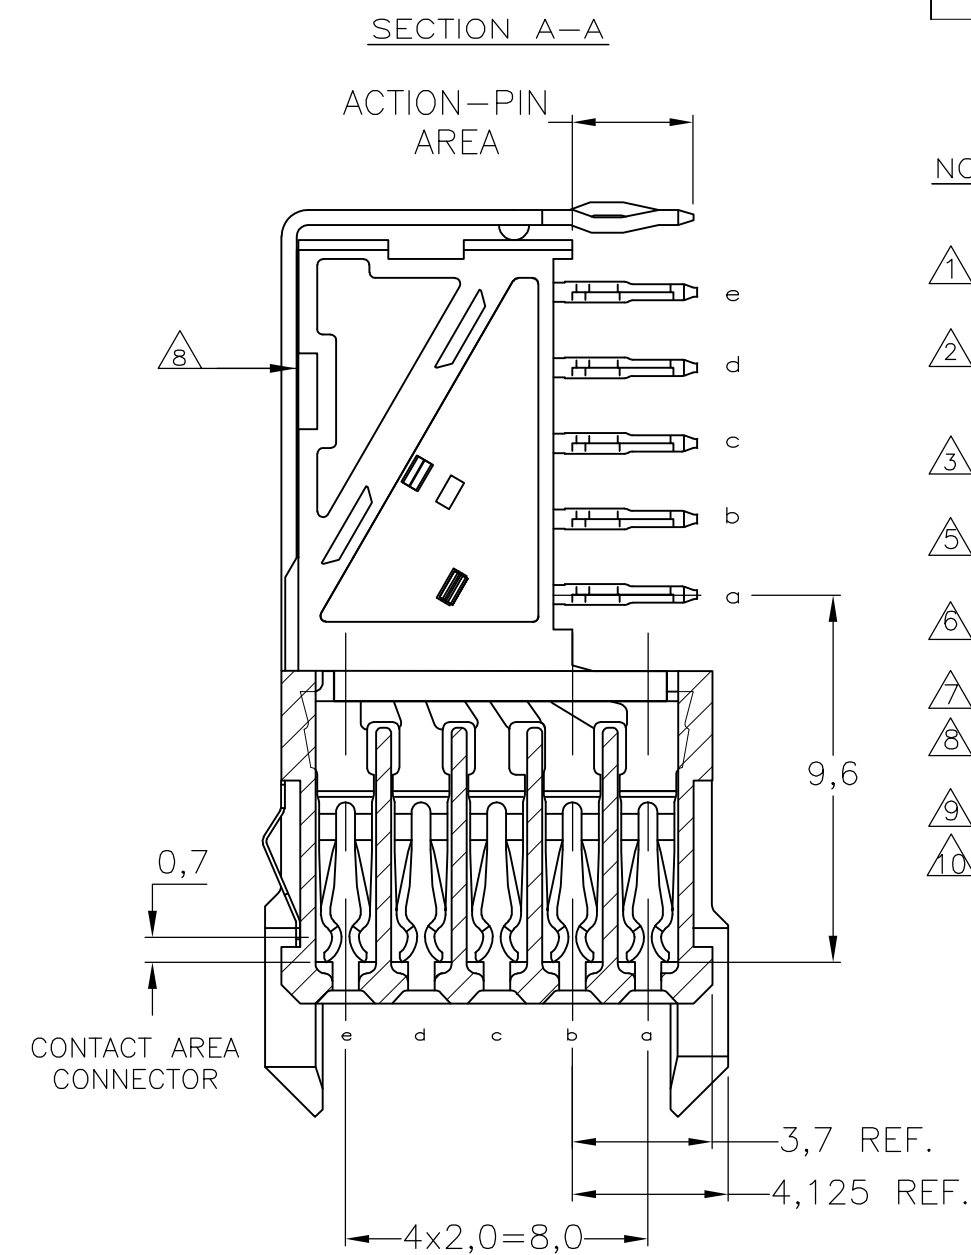

①	MATERIAL CONTACTS AND SHIELDS; PHOSPHORBRONZE MATERIAL HOUSING; GLASSFILLED POLYESTER (GRAY)
②	GENERAL PLATING SPECIFICATION: UNDERPLATING(ENTIRE CONTACT): 1,27μm NICKEL MIN. AND ACTION PIN: 0,5μm TIN-LEAD MIN. FOR PLATING OF MATING SURFACES SEE APPLICABLE SPECIFICATION REFERENCE FOR EACH DASH NUMBER.
③	CONFORMS TO ALL TESTING ACCORDING IEC 61076-4-101 PERFORMANCE LEVEL 2.
④	ASSEMBLY PRINTED WITH P/N AND DATECODE. THE MARKING CAN APPEAR ON THE FRONT SIDE OR THE BACK SIDE
⑤	HOLE PATTERN FOR FEMALE CONNECTOR 90 PLATED-THROUGH HOLES AT 2x2mm SQUARE GRID
⑥	ROW "f" 9 PLATED THROUGH HOLES FOR BOTH UPBERSHIELDS
⑦	SHIELDS MOUNTED ON CONNECTOR WITH DOUBLE SIDED ADHESIVE TAPE
⑧	AREA RESERVED FOR KEYING PART (BASIC P.N. 100526)
⑨	NO CONTACTS ON COLUMNS 6-7 AND 9-10

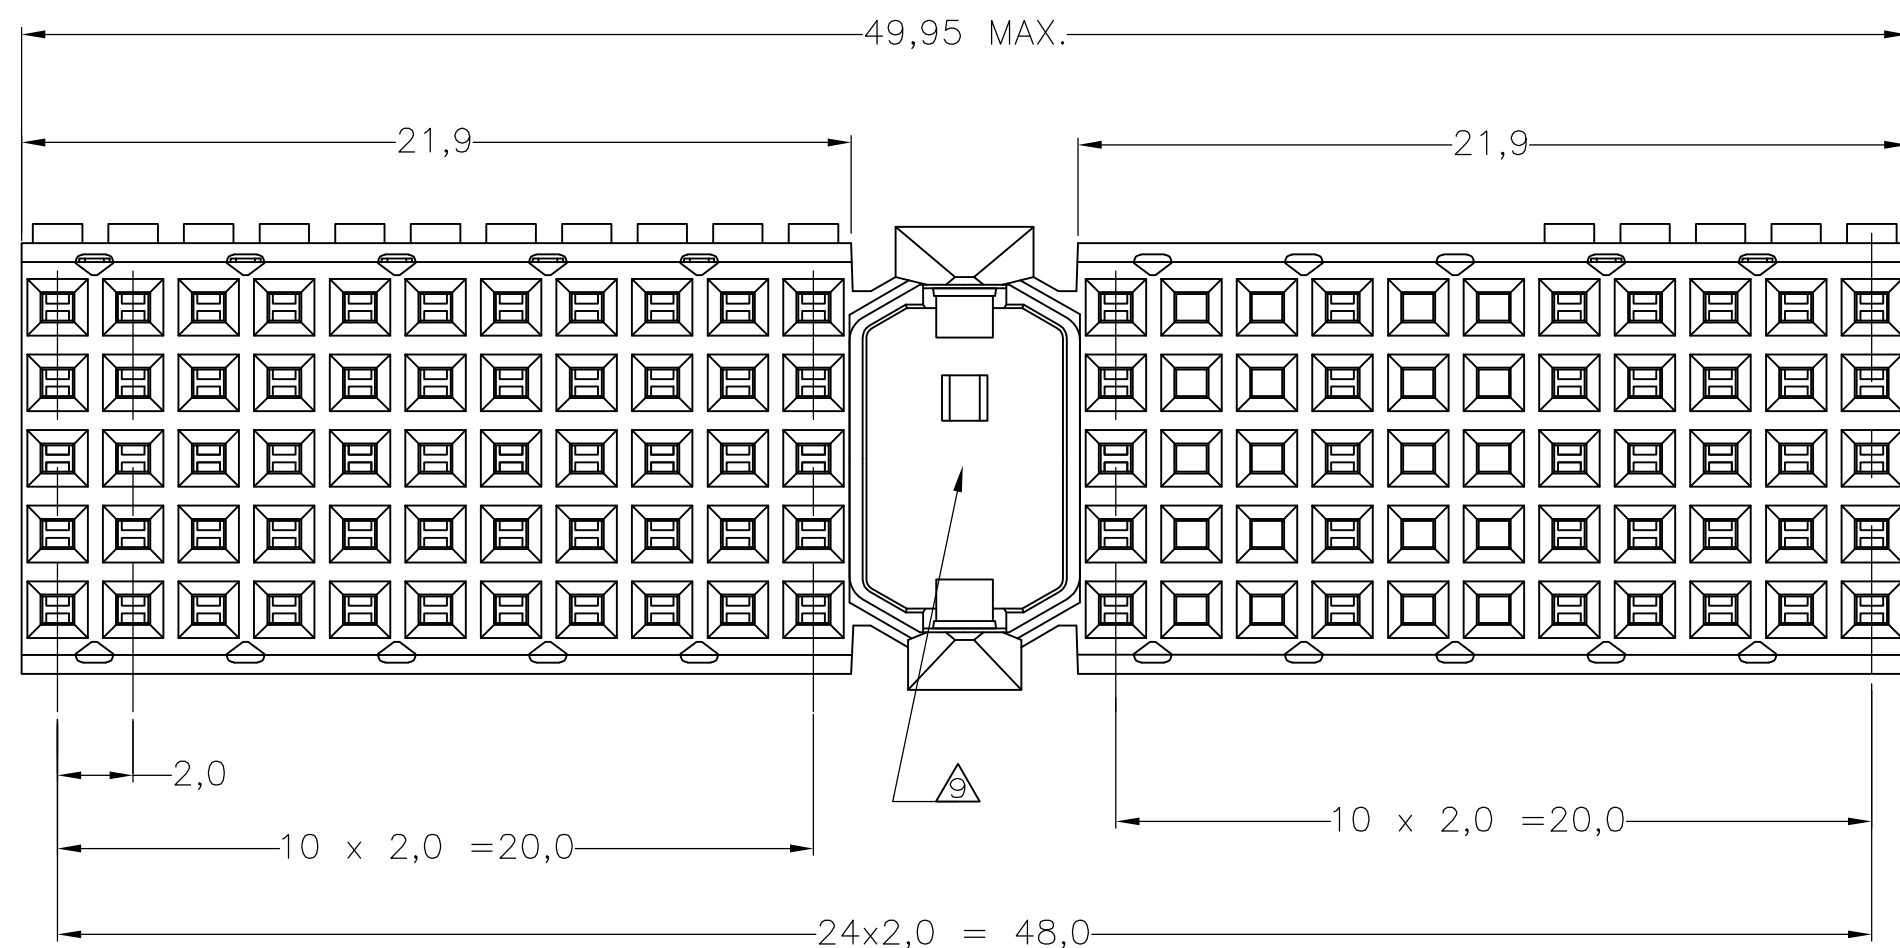

P.C.B. HOLE DIM. ACTION PIN
FOR DETAILS SEE
APPLICATION SPECIFICATION

DIMENSIONS:	TOLERANCES UNLESS OTHERWISE SPECIFIED:	
mm	0 PLC $\pm$ 1 PLC $\pm$ 2 PLC $\pm$ 3 PLC $\pm$ 4 PLC $\pm$ ANGLES $\pm$	± 0.2
MATERIAL	FINISH	
—	—	

DWN	23FEB98
W. V.D. HEIJDEN	
CHK	23FEB98
W. V.D. HEIJDEN	
APVD	23NOV99
F.V.KONINGSBRUGGE	
PRODUCT SPEC	
108-19082	
APPLICATION SPEC	
114-19029	
WEIGHT	—
CUSTOMER DRAWING	

		TE Connectivity	
NAME			
Z-PACK 2MM HM TYPE A - 16 COLUMNS (J4 VERSION) PRE-SHIELDED RECEPTACLE			
SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A2	00779	Ⓒ-352359	—
SCALE		NTS	SHEET 1 OF 1
			REV 1