

A

B

C

D

E

F

1 0 | 2 0 | 2 8 - X 0 C - X X X L F

6-COLUMN
DIFFERENTIAL
SIGNAL

LEAD-FREE DESIGNATION
ONLY WITH APPLICABLE
PLATING CODES

LETTER	PLATING (SEE NOTE 6)	
	APPLICATION	TYPE (REFERENCE)
B	TELCORDIA CO	0.76um GOLD or GXT
C	TELCORDIA UE	1.27um GOLD
D	TELCORDIA CO	0.76um GOLD or GXT, LEAD-FREE
E	TELCORDIA UE	1.27um GOLD, LEAD-FREE

NUMBER	GUIDE PIN STYLE (SEE NOTE 8)
0	STANDARD GUIDE PIN, MACHINED
1	STANDARD GUIDE PIN, ROLLED


MODULE DESCRIPTION	LETTER DESIGNATION REPRESENTED IN DASH NUMBER										BASE MODULE
LEFT POLARIZING GUIDANCE MODULE (SEE SHEET 6)	N	J	A	B	C	D	E	F	G	H	
	NO KEY NO GUIDE PIN										
RIGHT POLARIZING GUIDANCE MODULE (SEE SHEET 7)	Z	Y	P	Q	R	S	T	U	V	W	
	NO KEY NO GUIDE PIN										
OPEN MODULE (TWO WALL) (SEE SHEET 2)	0 (ZERO)										
LEFT WALL MODULE (SEE SHEET 3)	L										
RIGHT WALL MODULE (SEE SHEET 4)	M										
FOUR WALL MODULE (SEE SHEET 5)	1 (ONE)										

NUMBER	CONTACT MATING WIPE LENGTH		COMPLIANT TAIL TYPE (SEE NOTE 9)
	SIGNAL	GROUND	
1	2 MM	4 MM	0.55 (0.0217") DRILL
2	3 MM	4 MM	0.55 (0.0217") DRILL
3	2 MM	4 MM	0.45 MICRO (0.0177") DRILL
4	3 MM	4 MM	0.45 MICRO (0.0177") DRILL
5	2 MM	3 MM	0.55 (0.0217") DRILL
6	3 MM	3 MM	0.55 (0.0217") DRILL
7	2 MM	3 MM	0.45 MICRO (0.0177") DRILL
8	3 MM	3 MM	0.45 MICRO (0.0177") DRILL
FOR CUSTOM-LOADED MODULES, SEE INDIVIDUAL CUSTOM DRAWINGS WITH THE DRAWING-NUMBER FORMAT OF 10120128-XXXX, WHERE: "X" DENOTES MODULE TYPE PER CHART ON THIS SHEET "YYYY" IS A SEQUENTIAL NUMBER BEGINNING WITH "0001".			




TABLE 1 (SEE NOTE 11)		
	UNGROUND	GROUND
FHS	Ø2.35-Ø2.55	Ø2.35-Ø2.55
PAD	N/A	Ø5.50
PLATED	NO	YES
DRILL(mm)	2.44mm	2.58mm
DRILL(in)	0.096"	0.1015"

TABLE 2 (SEE NOTE 12)		
SCREW P/N	DESCRIPTION	BOARD THICKNESS
10091790-002LF	#2-56 X 0.375" LG. PHILIPS PANHEAD W/SQ CONICAL WASHER	1.60-5.00mm
10091790-003LF	#2-56 X 0.375" LG. PHILIPS PANHEAD W/SQ CONICAL WASHER	5.00-10.00mm




spec ref	-
tolerance std	ISO 406 ISO 1101
surface	linear
ISO 1302	angular
tolerances unless otherwise specified	0.X ±0.3 0.XX ±0.10 0.XXX ±0.050 0° ±2°

dr	Yong-Keat Lim	2012/03/01	projection		mm		size	A2	scale	1:1	
eng	Sandar Soe	2016/03/08					ecn no	ELX-S-17624-1			
chr	-	-	product family	-			rel level	Released			
appr	Chen-Hong Tan	2016/03/17									
Amphenol FCI			title				MODULE ASSEMBLY, XCEDE HD				rev
			Vertical Header, 4 Pair 6 Column				10120128				C
www.fci.com			cat. no.		-		Product - Customer Drw				sheet 1 of 8


OPEN WALL MODULE

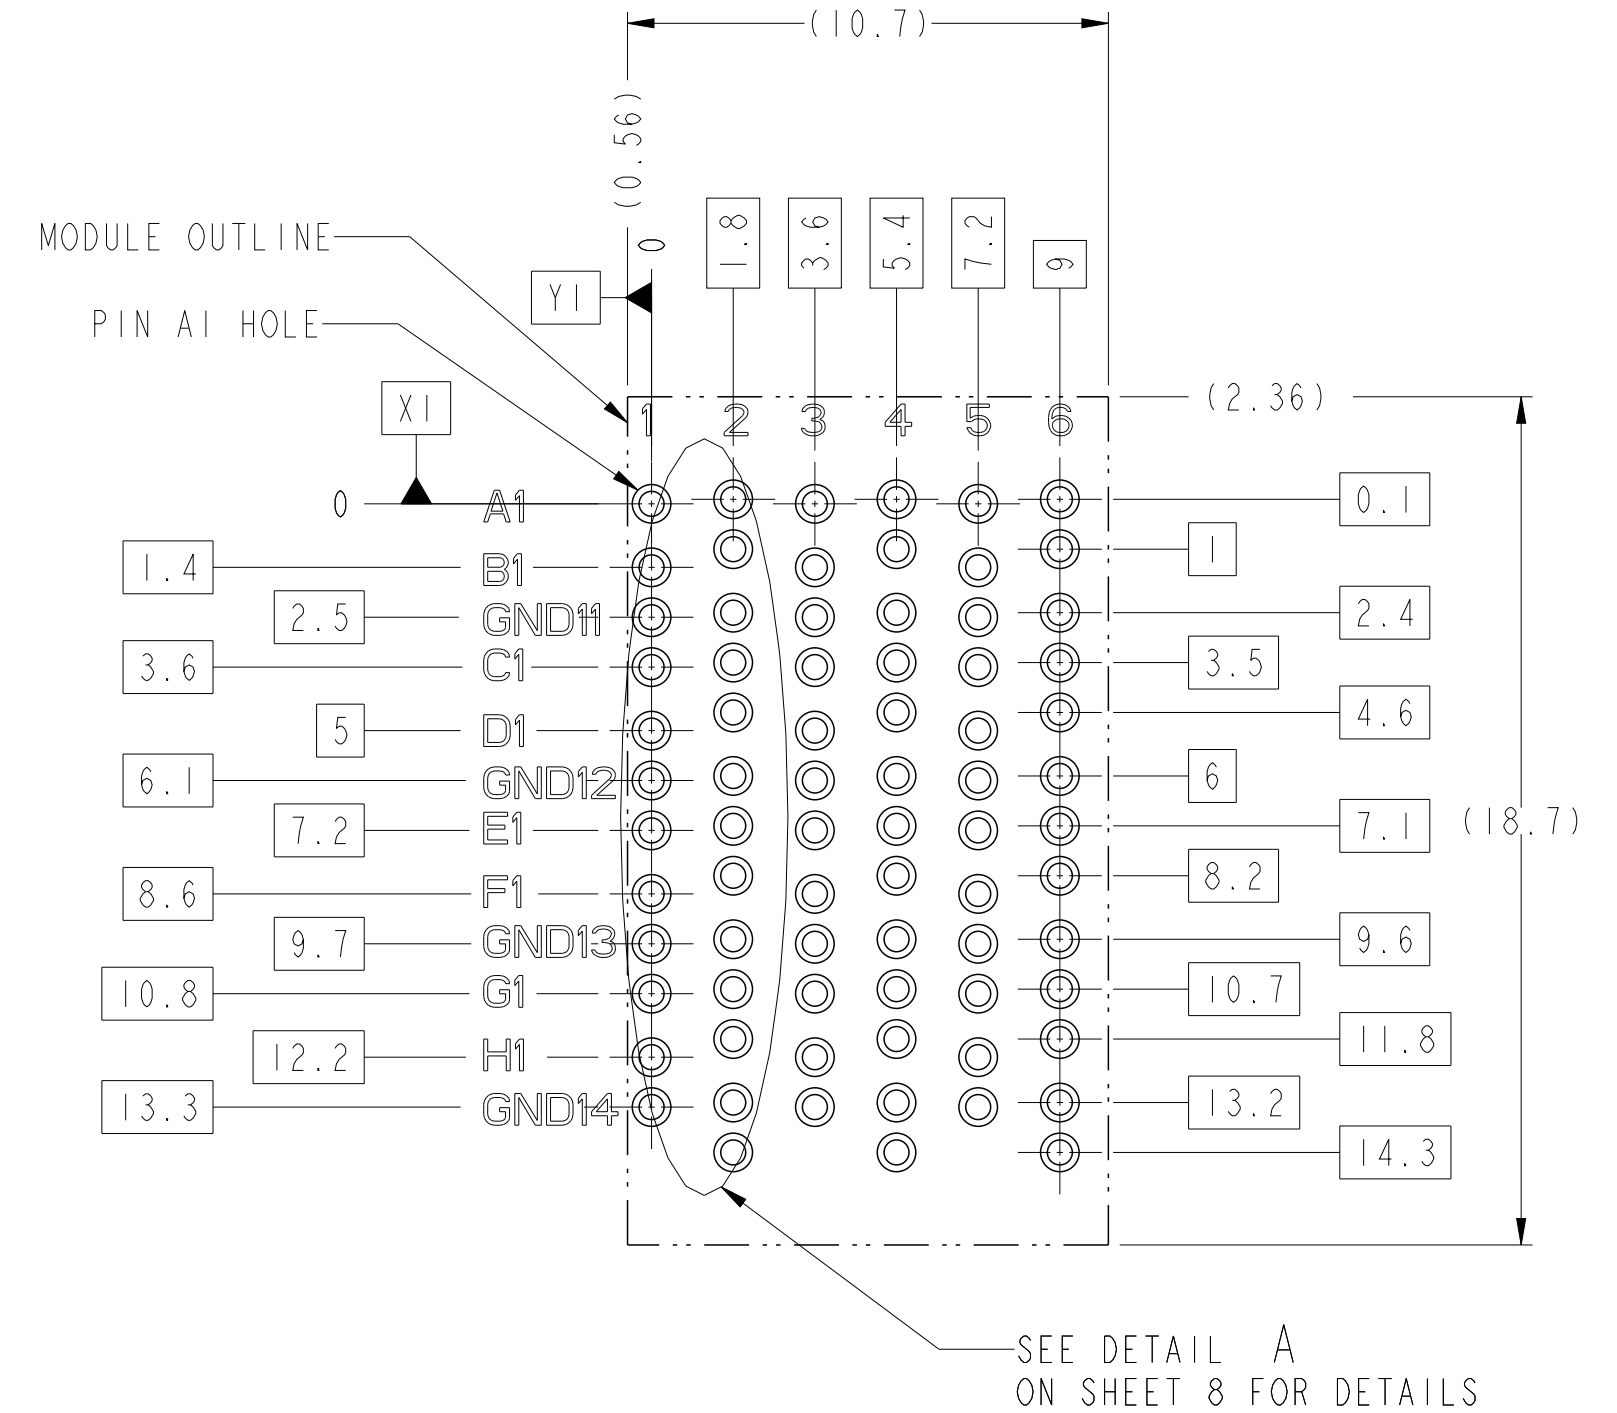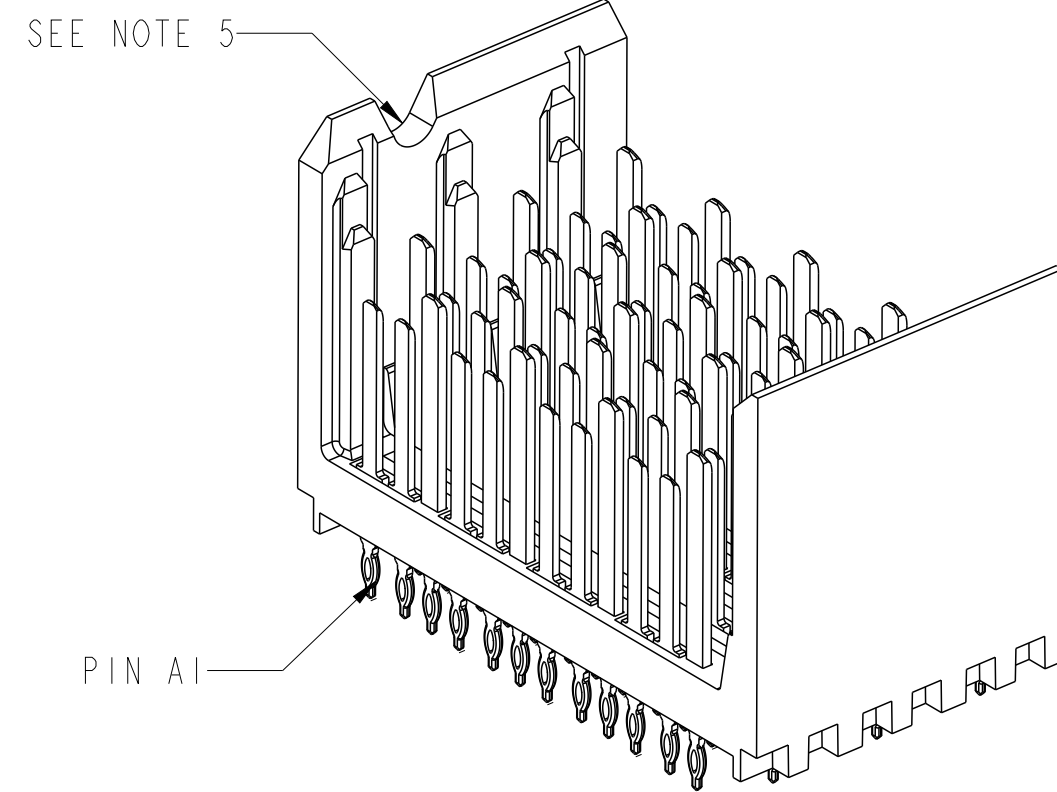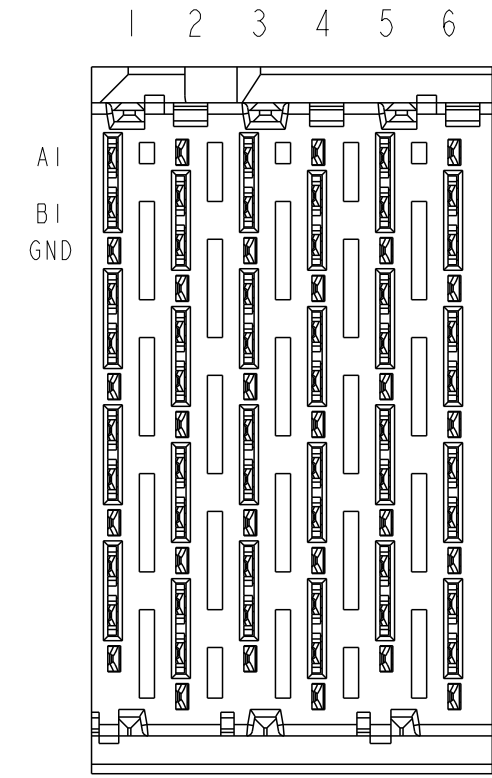

BP HOLE PATTERN COMPONENT SIDE
OPEN WALL MODULE BACKPLANE FOOTPRINT

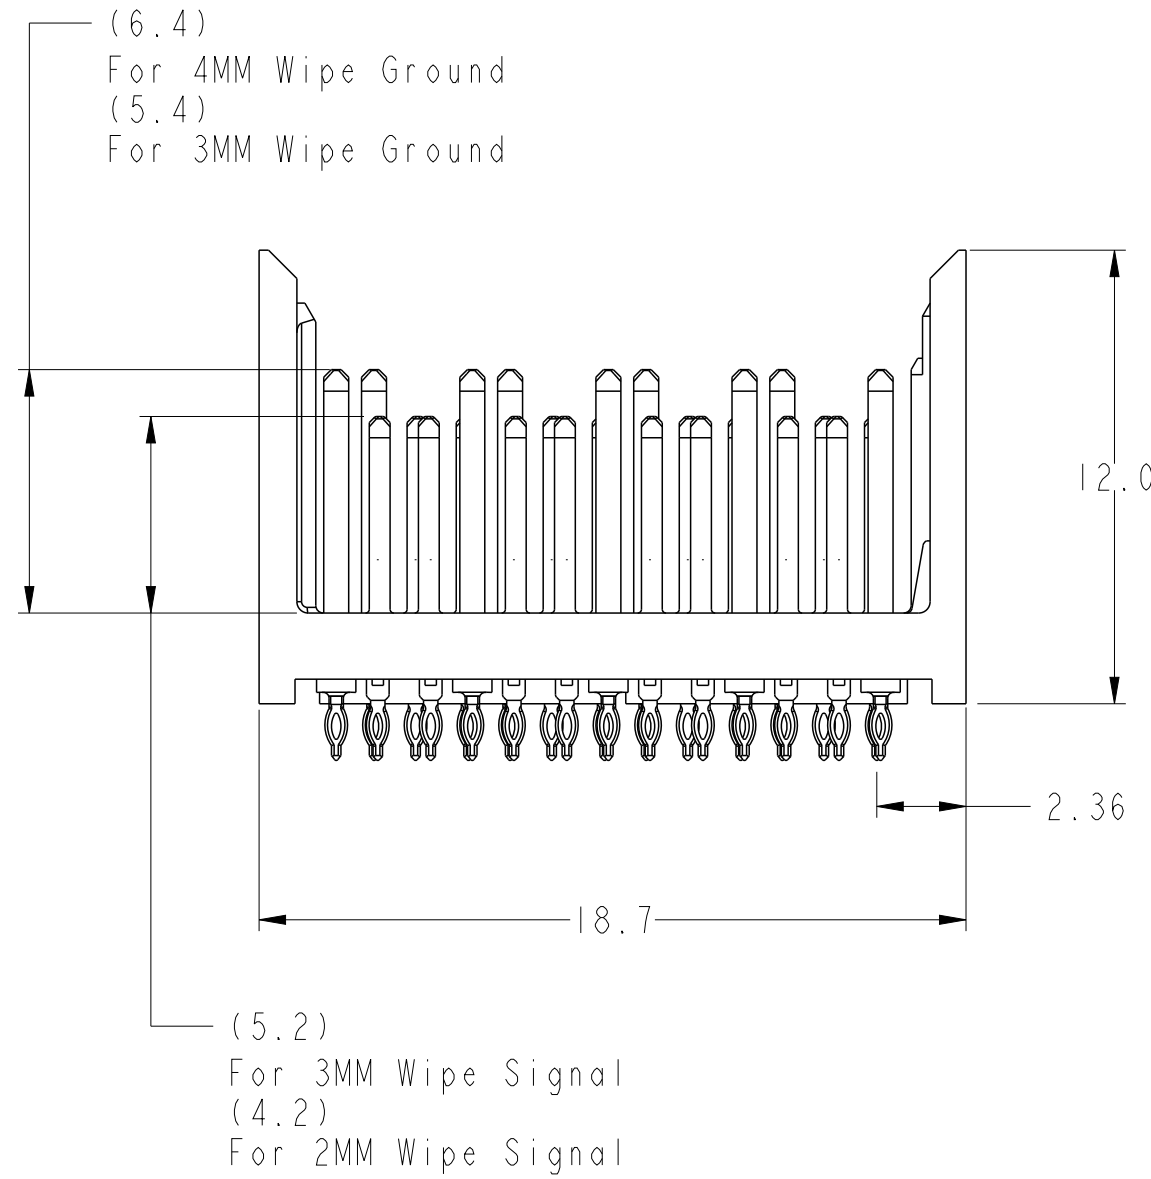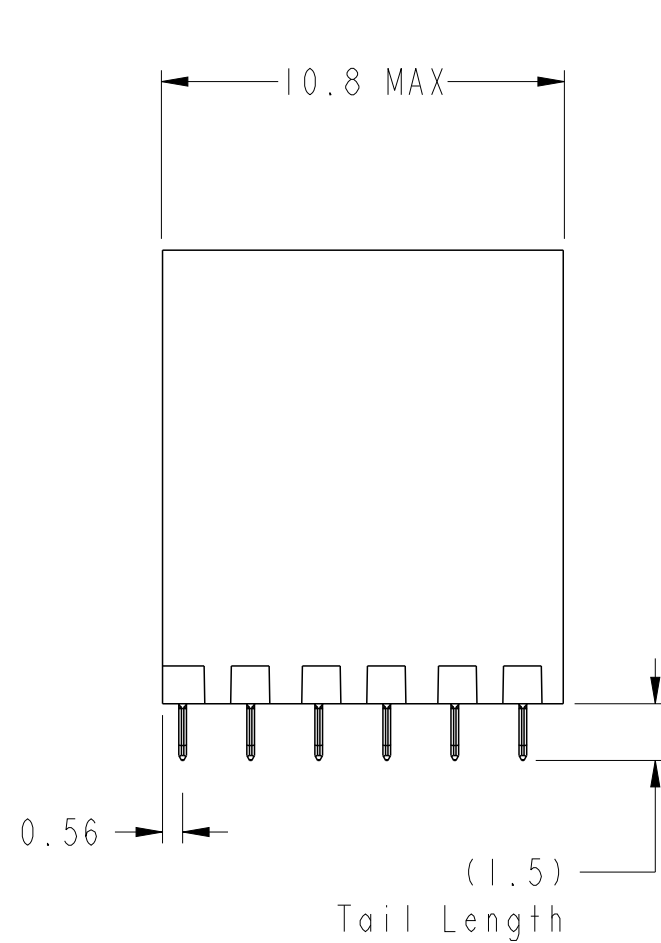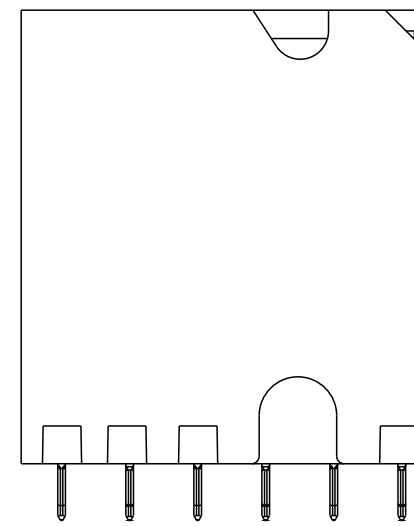



spec ref	-	dr	Yong-Keat Lim	2012/03/01	projection	mm	size	A2	scale	2:1
tolerance std	ISO 406 ISO 1101	eng	Sandar Soe	2016/03/08	chr	-	ecn no	ELX-S-17624-1	rel level	Released
surface	ISO 1302	appr	Chen-Hong Tan	2016/03/17	product family	XCEDE HD	cat. no.	10120128	rev	C
TOLERANCES UNLESS OTHERWISE SPECIFIED		Amphenol FCI		MODULE ASSEMBLY, XCEDE HD		Vertical Header, 4 Pair 6 Column		Product - Customer Drw		sheet 2 of 8
linear		0.X	±0.3	angular		0°	±2°	PDS: Rev :C		STATUS:Released
0.XX		±0.10	0.XXX		±0.050	Printed: Mar 17, 2016				

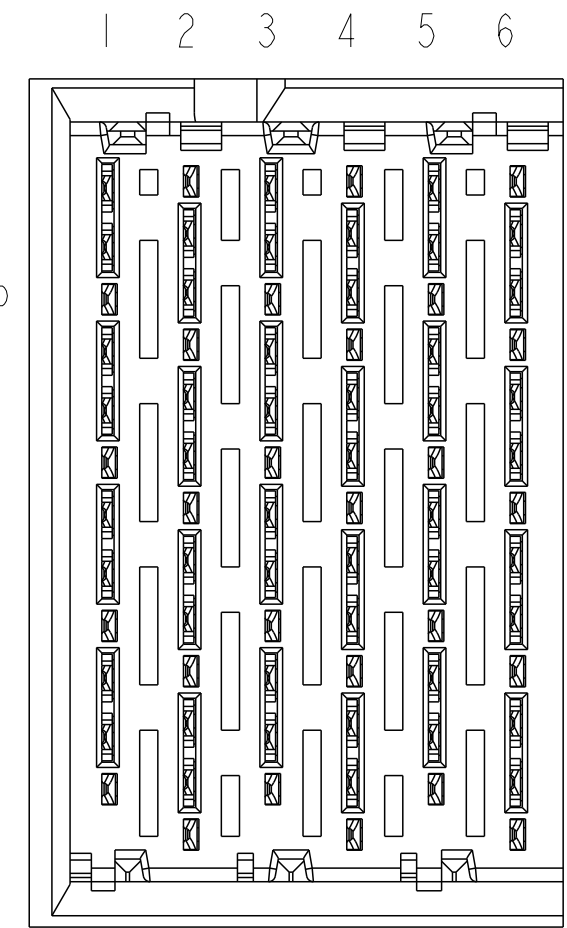




LEFT WALL MODULE

SEE NOTE 5

PIN A1

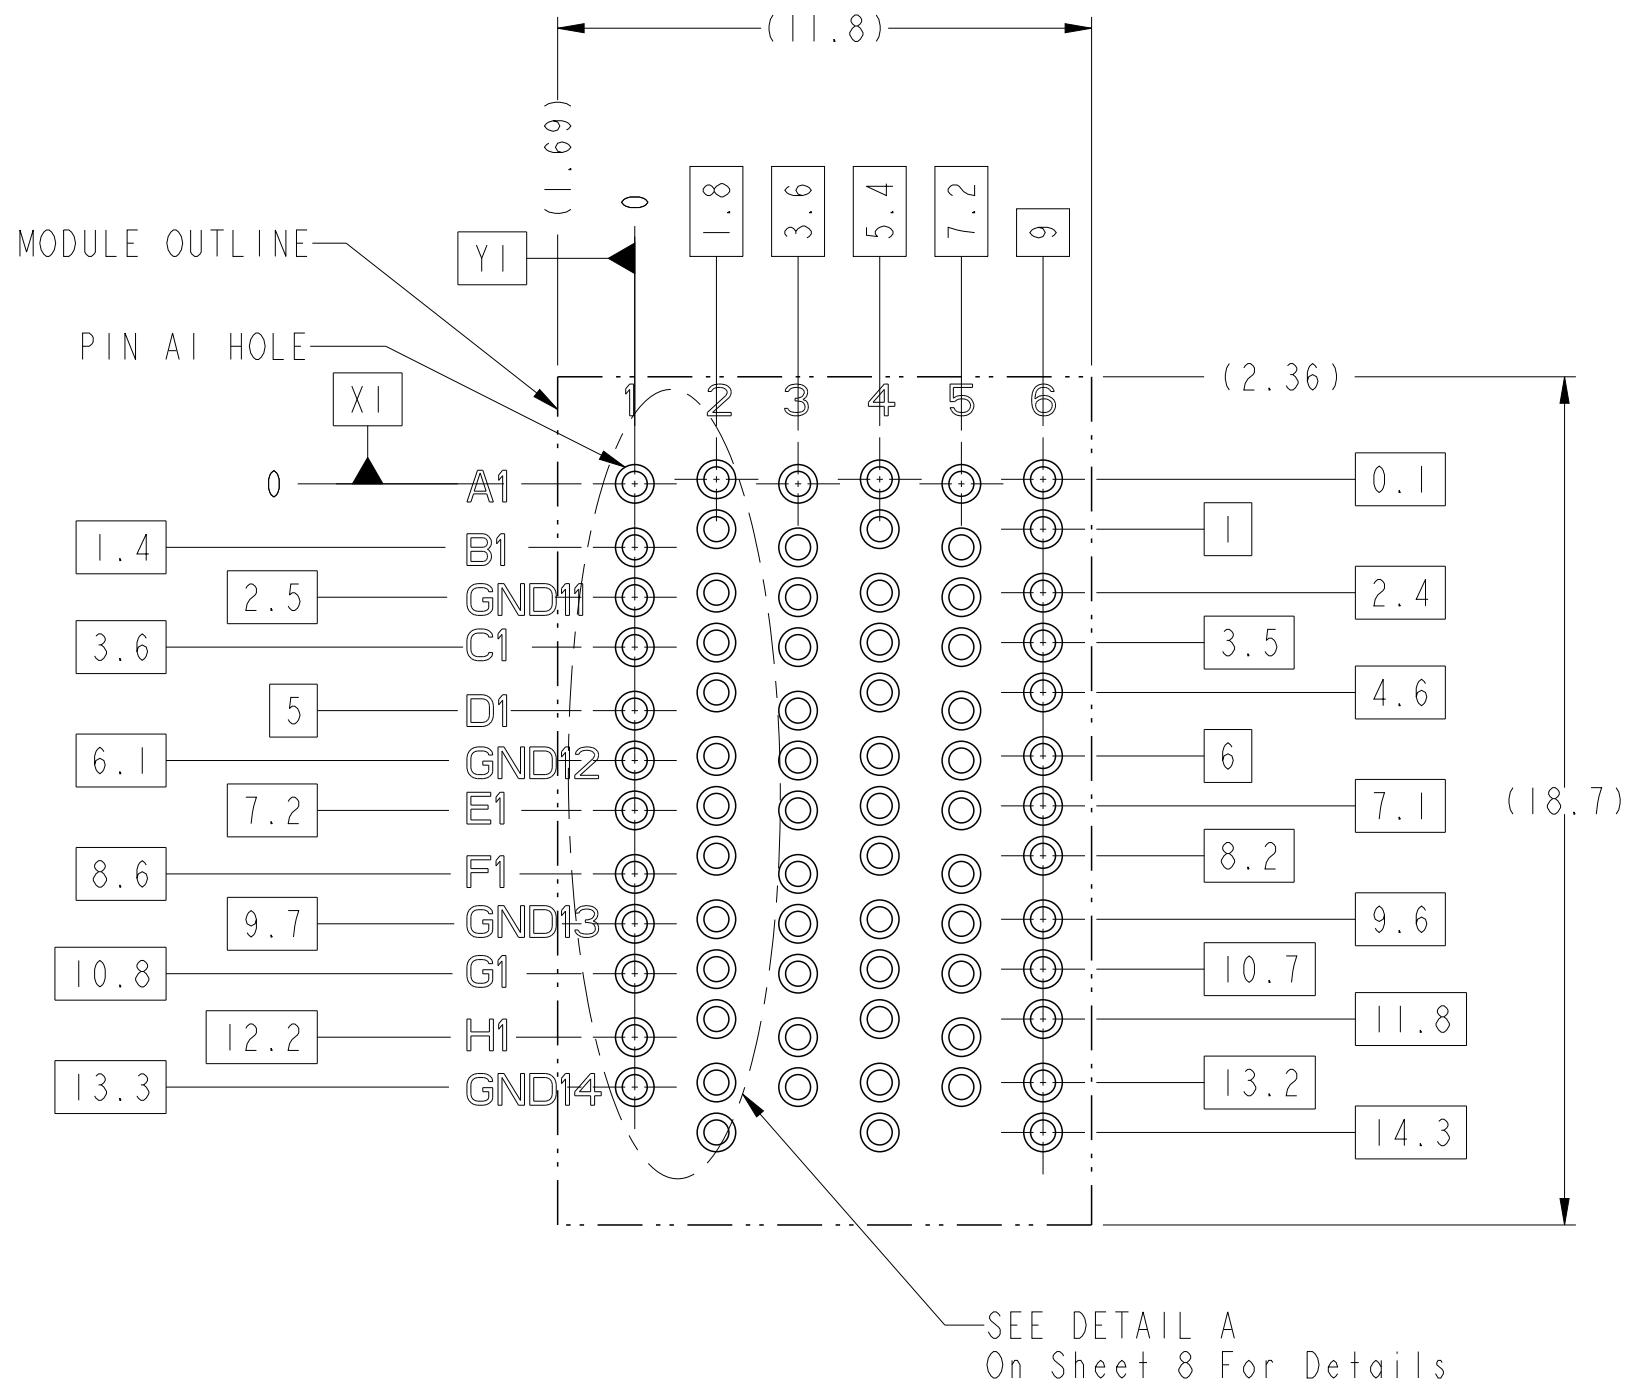
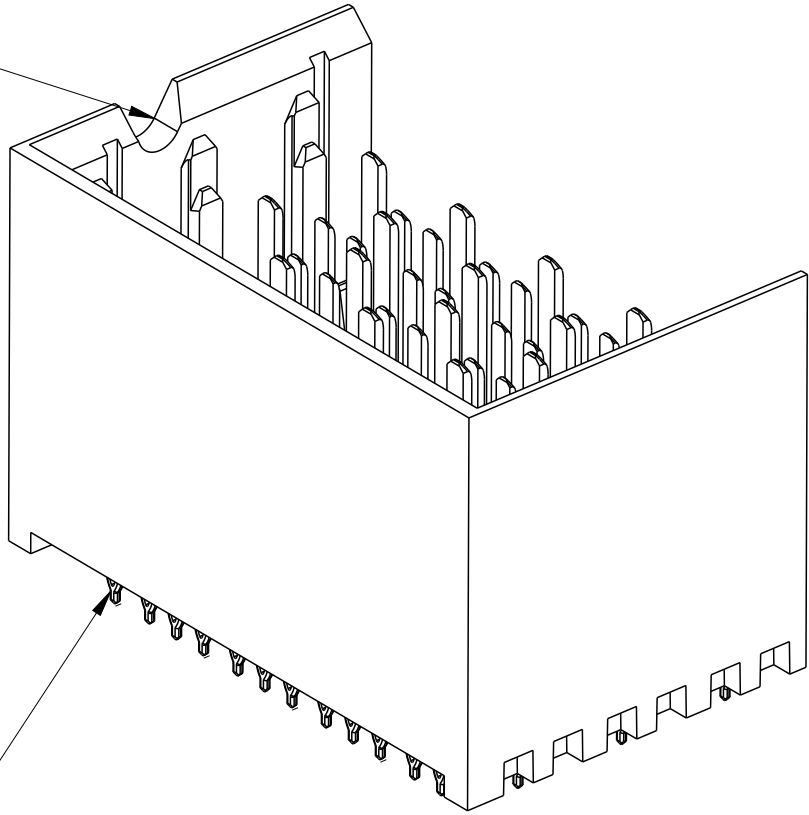


SEE DETAIL A
On Sheet 8 For Details


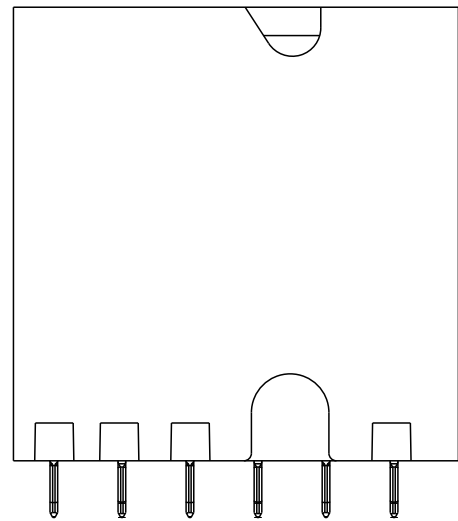
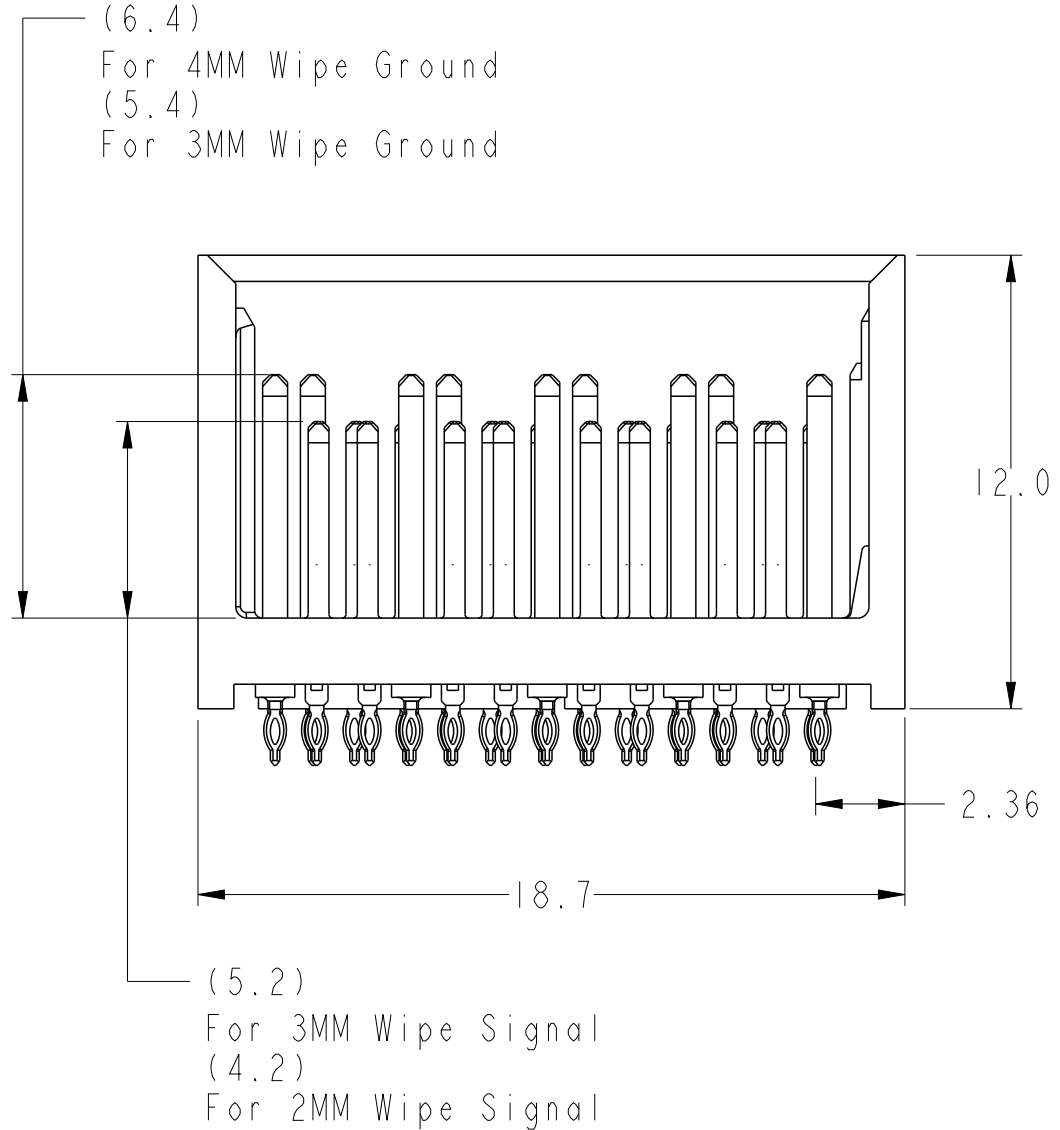
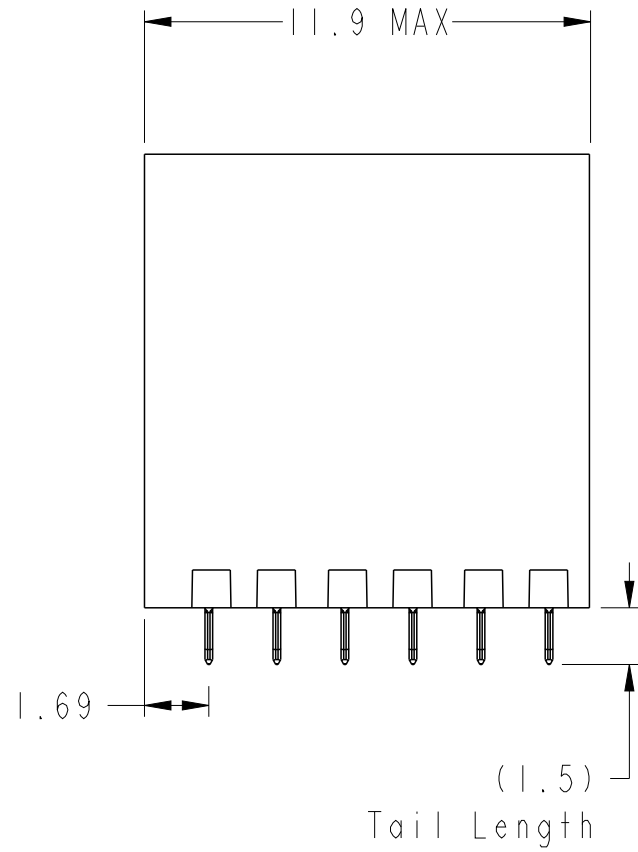


BP HOLE PATTERN COMPONENT SIDE
LEFT WALL MODULE BACKPLANE FOOTPRINT

spec ref	-	dr	Yong-Keat Lim	2012/03/01	projection	mm	size	A2	scale	2:1
tolerance std	ISO 406 ISO 1101	eng	Sandar Soe	2016/03/08	chr	-	ecn no	ELX-S-17624-1	rel level	Released
surface	ISO 1302	appr	Chen-Hong Tan	2016/03/17	product family	XCEDE HD	cat. no.	10120128	rev	C
TOLERANCES UNLESS OTHERWISE SPECIFIED		Amphenol FCI		MODULE ASSEMBLY, XCEDE HD		Vertical Header, 4 Pair 6 Column		Product - Customer Drw		sheet 3 of 8
linear	0.X ±0.3 0.XX ±0.10 0.XXX ±0.050	angular	0° ±2°	PDS: Rev :C		STATUS:Released		Printed: Mar 17, 2016		

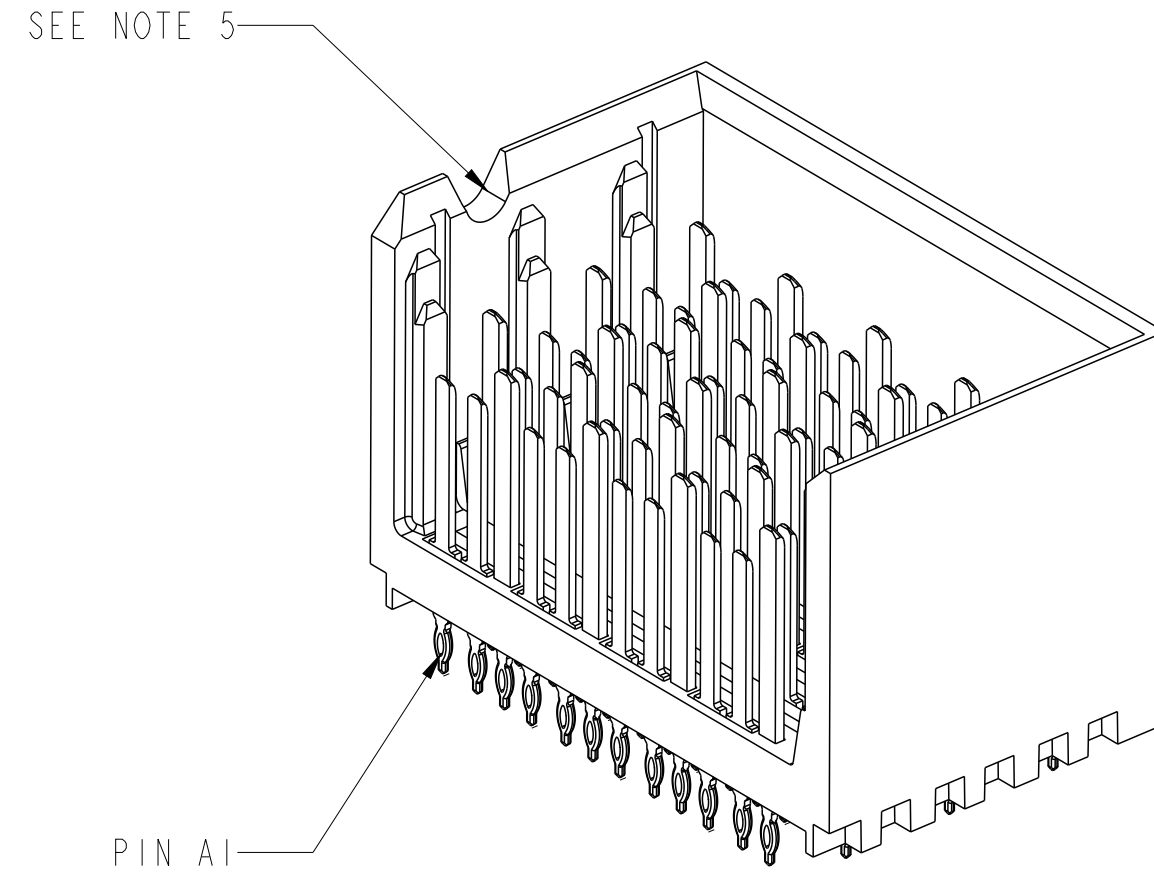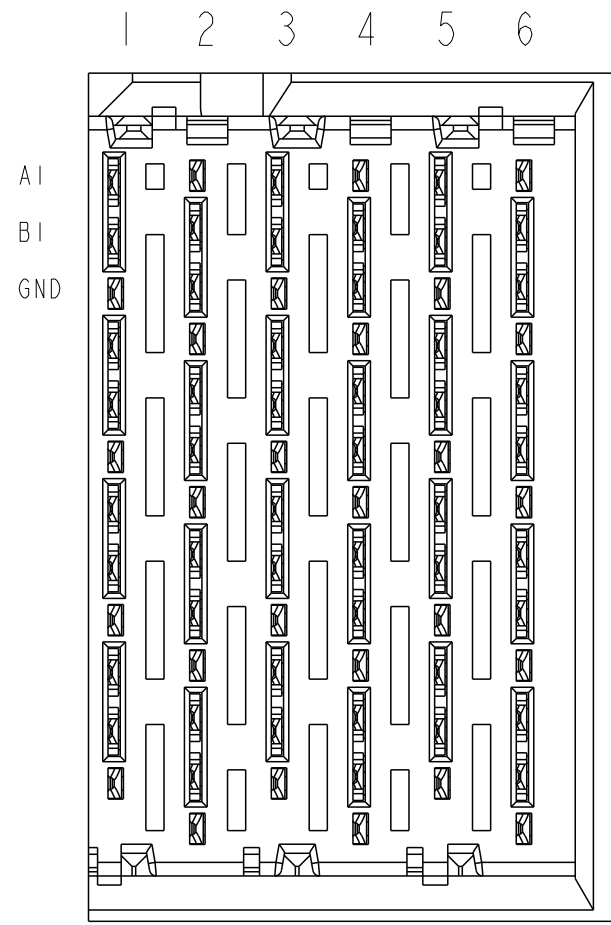


RIGHT WALL MODULE

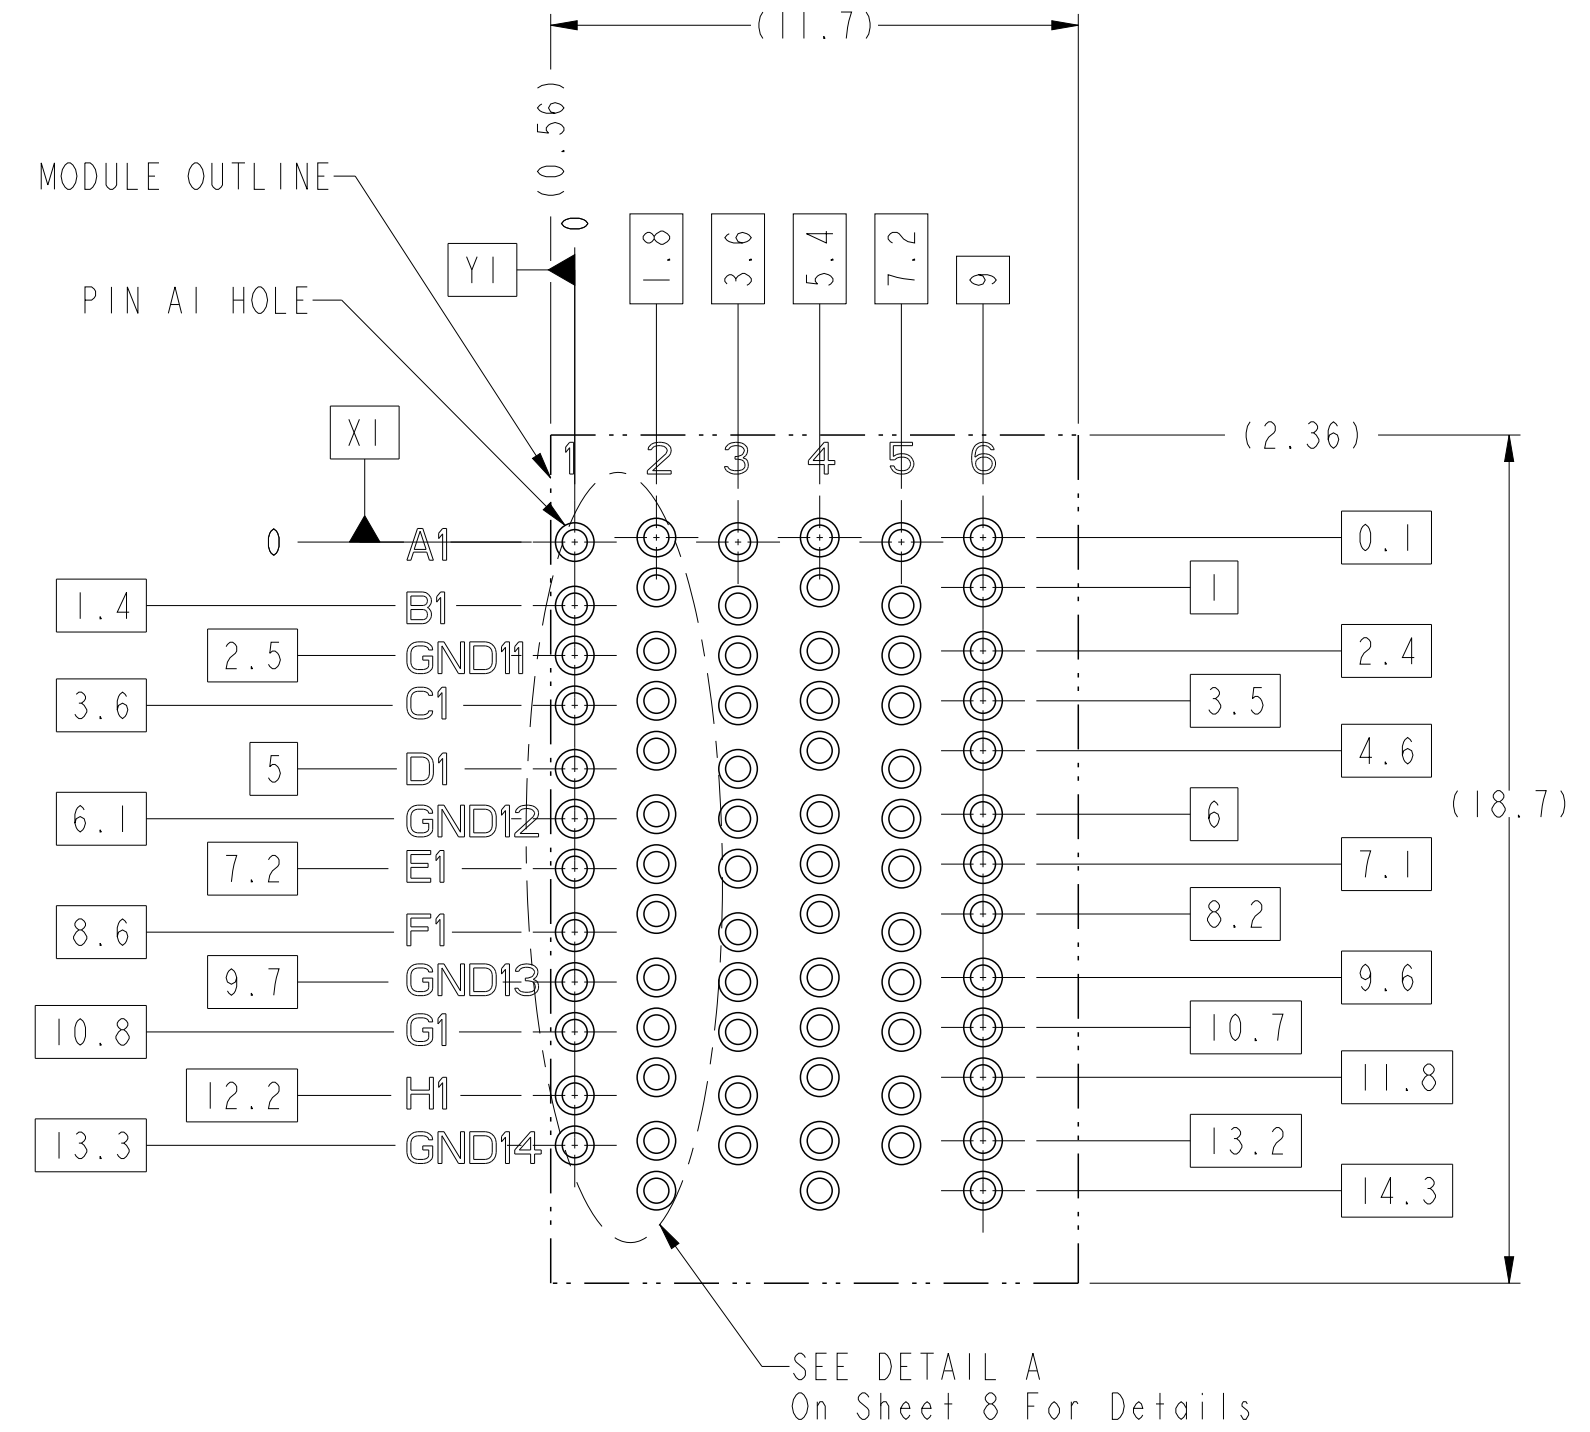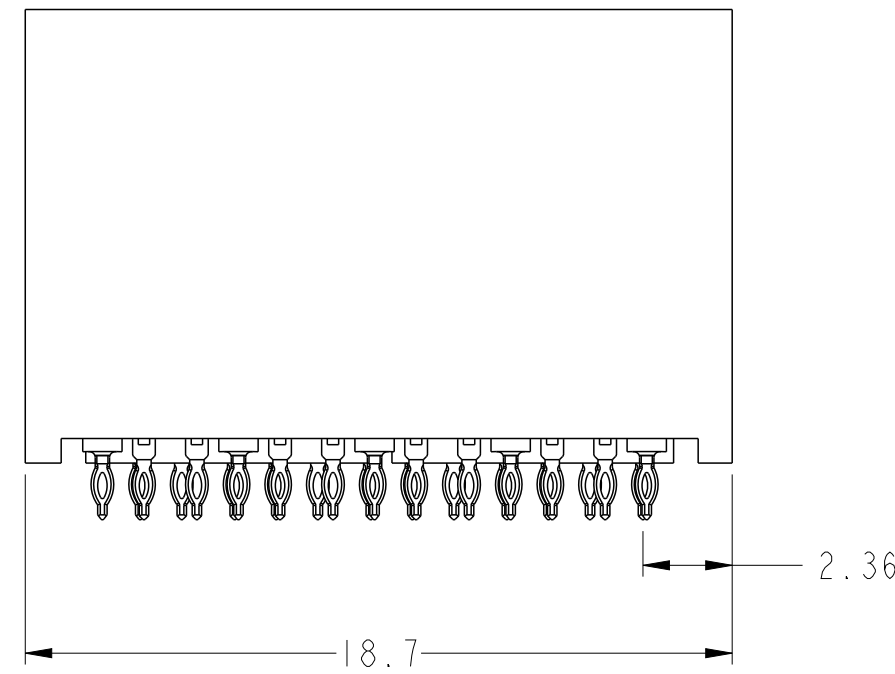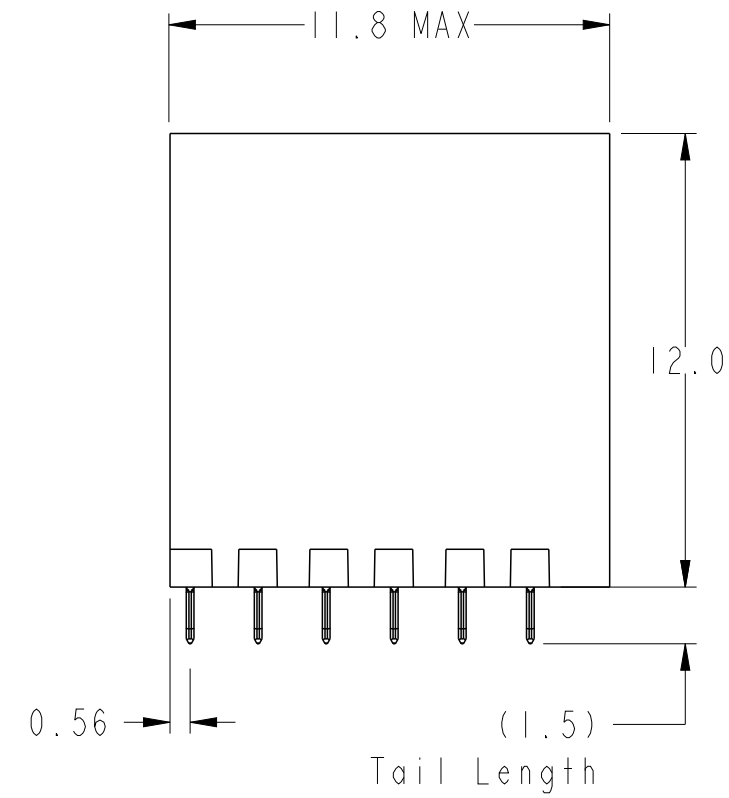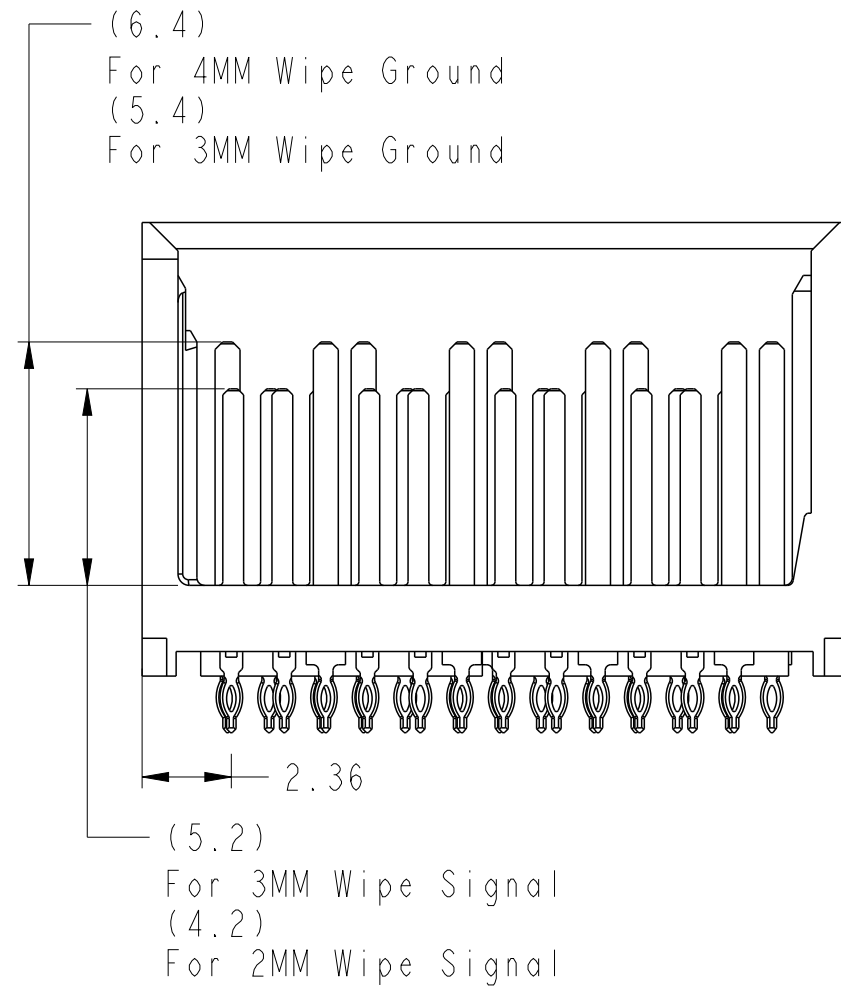


BP HOLE PATTERN COMPONENT SIDE
RIGHT WALL MODULE BACKPLANE FOOTPRINT

spec ref	-	dr	Yong-Keat Lim	2012/03/01	projection	mm	size	A2	scale	2:1
tolerance std	ISO 406 ISO 1101	eng	Sandar Soe	2016/03/08	chr	-	ecn no	ELX-S-17624-1	rel level	Released
surface	ISO 1302	appr	Chen-Hong Tan	2016/03/17	product family	XCEDE HD	cat. no.	10120128	rev	C
TOLERANCES UNLESS OTHERWISE SPECIFIED		Amphenol FCI		MODULE ASSEMBLY, XCEDE HD		Vertical Header, 4 Pair 6 Column		Product - Customer Drw		sheet 4 of 8
linear		0.X	±0.3	angular		0°	±2°	PDS: Rev :C		STATUS:Released
0.XX		±0.10	0.XXX		±0.050	Printed: Mar 17, 2016				



1 2 3 4 5 6

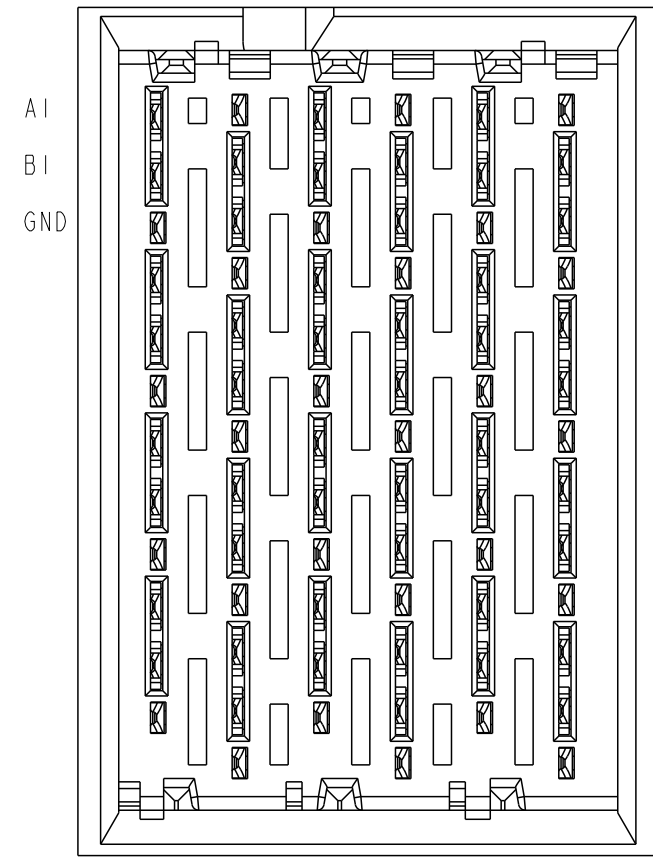


SEE NOTE 5

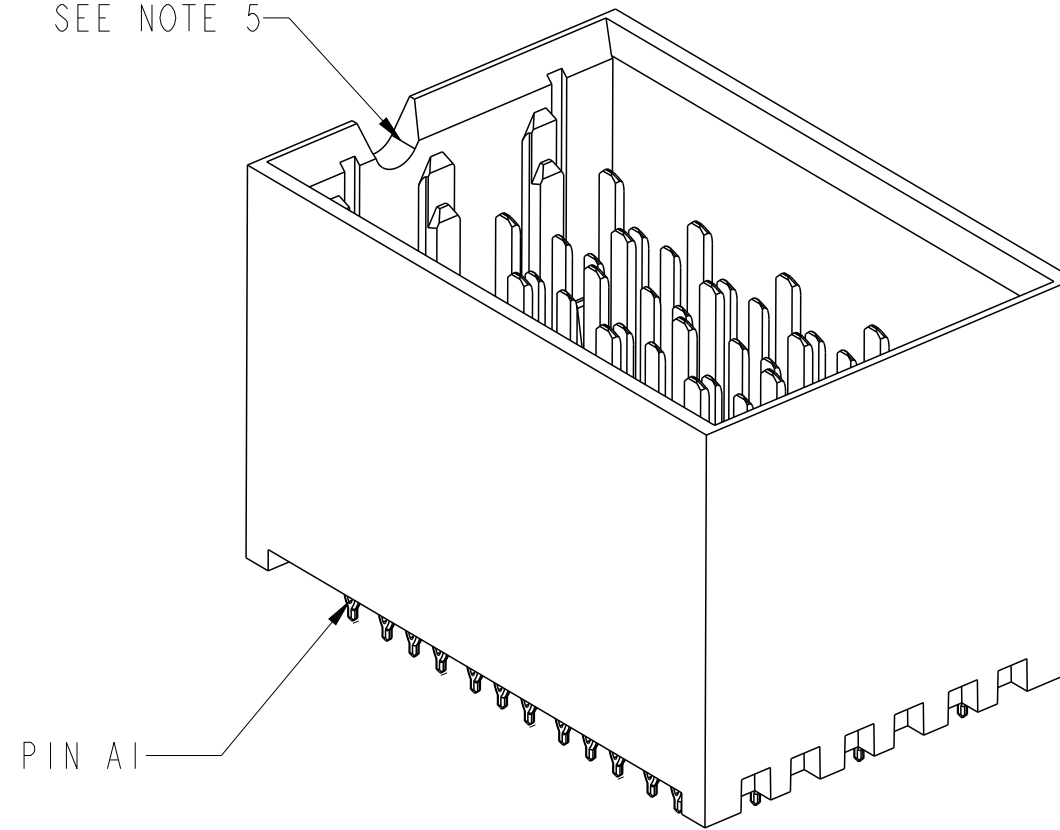


△ FOUR WALL MODULE

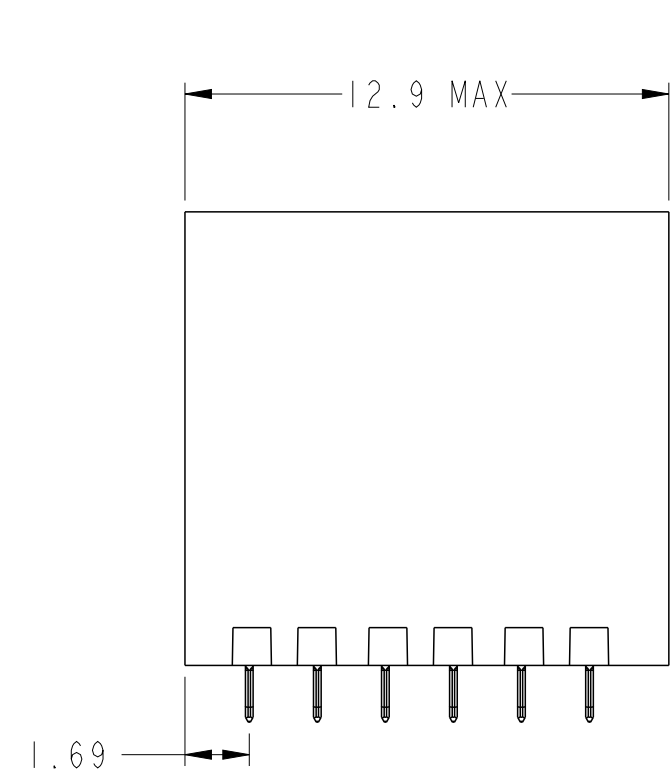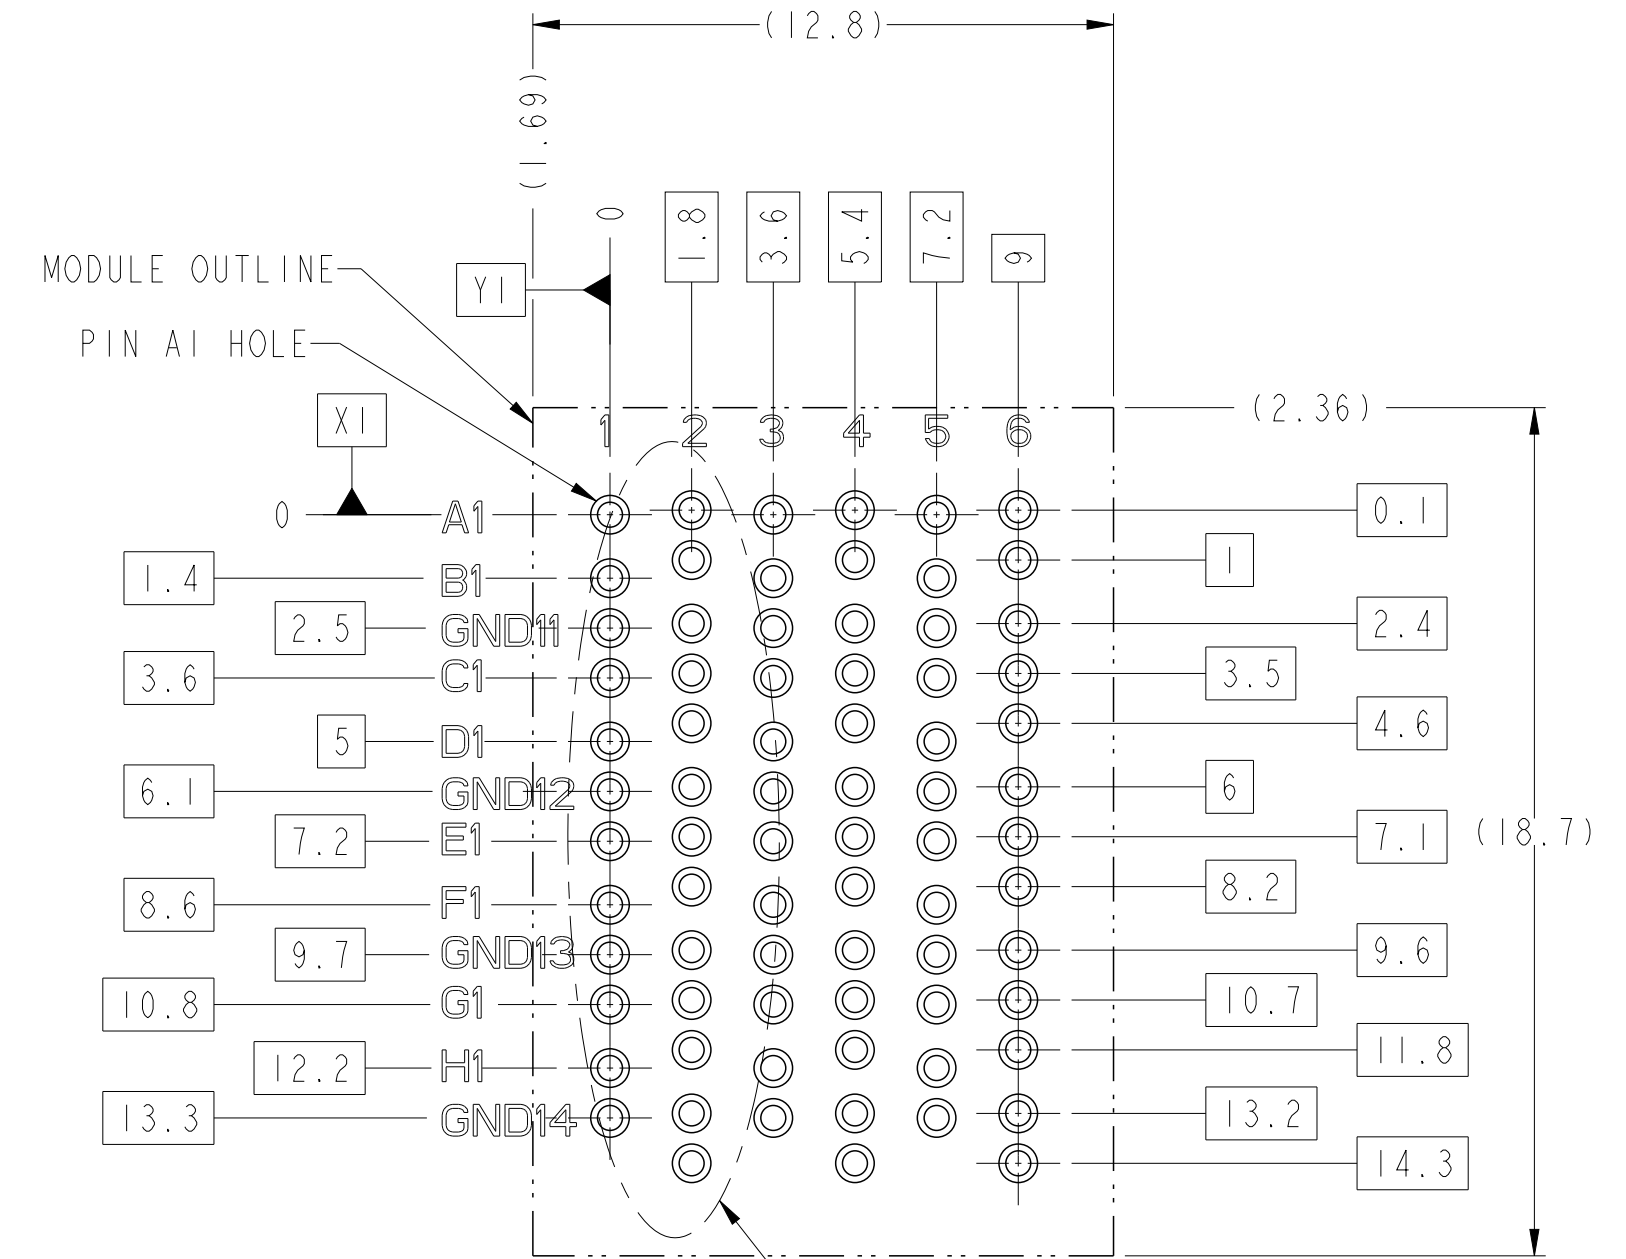

(6.4)
For 4MM Wipe Ground
(5.4)
For 3MM Wipe Ground

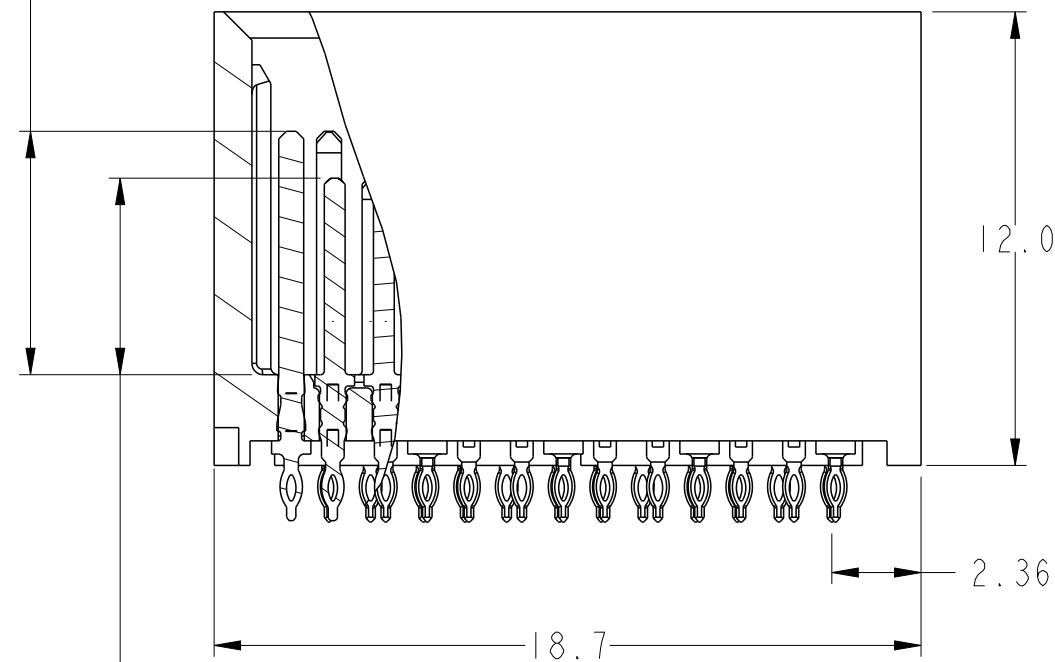

(5.2)
For 3MM Wipe Signal
(4.2)
For 2MM Wipe Signal

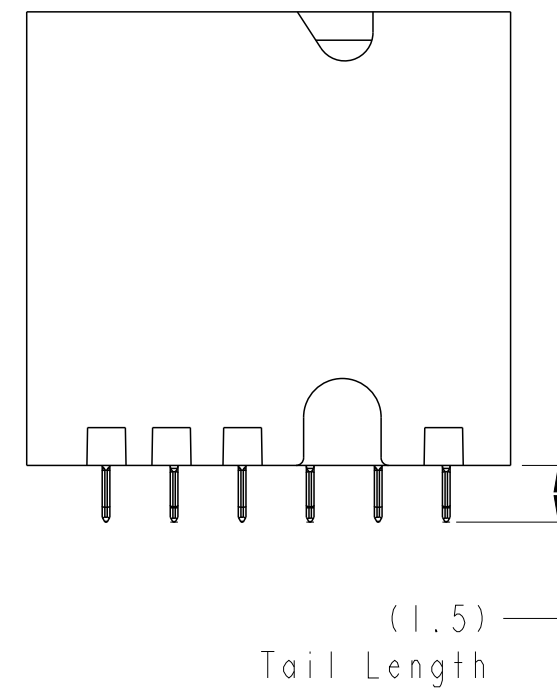

BP HOLE PATTERN COMPONENT SIDE


△ FOUR WALL MODULE BACKPLANE FOOTPRINT

spec ref	-	dr	Yong-Keat Lim	2012/03/01	projection	mm	size	A2	scale	2:1
tolerance std	ISO 406 ISO 1101	eng	Sandar Soe	2016/03/08	chr	-	ecn no	ELX-S-17624-1	rel level	Released
surface	ISO 1302	appr	Chen-Hong Tan	2016/03/17	product family	XCEDE HD	rel level	Released	rev	C
linear	0.X ±0.3 0.XX ±0.10 0.XXX ±0.050	Amphenol FCI	title	MODULE ASSEMBLY, XCEDE HD	dwg no	10120128	cat. no.	-	Product - Customer Drw	sheet 5 of 8
angular	0° ±2°	www.fci.com	cat. no.	-	Product - Customer Drw	sheet 5 of 8				

PDS: Rev :C


STATUS:Released

Printed: Mar 17, 2016

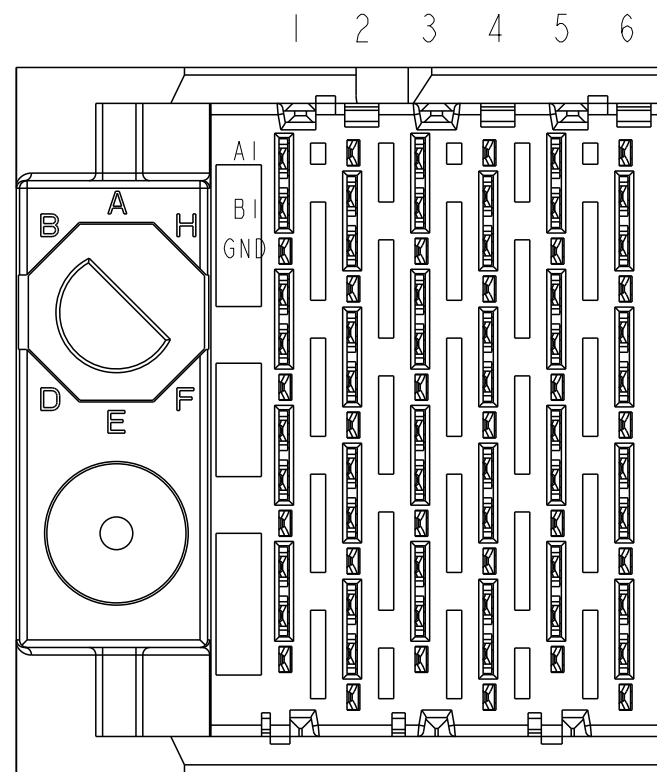


LEFT POLARIZING/GUIDE MODULE



Optional Key See Sheet 1
Part Number Tree

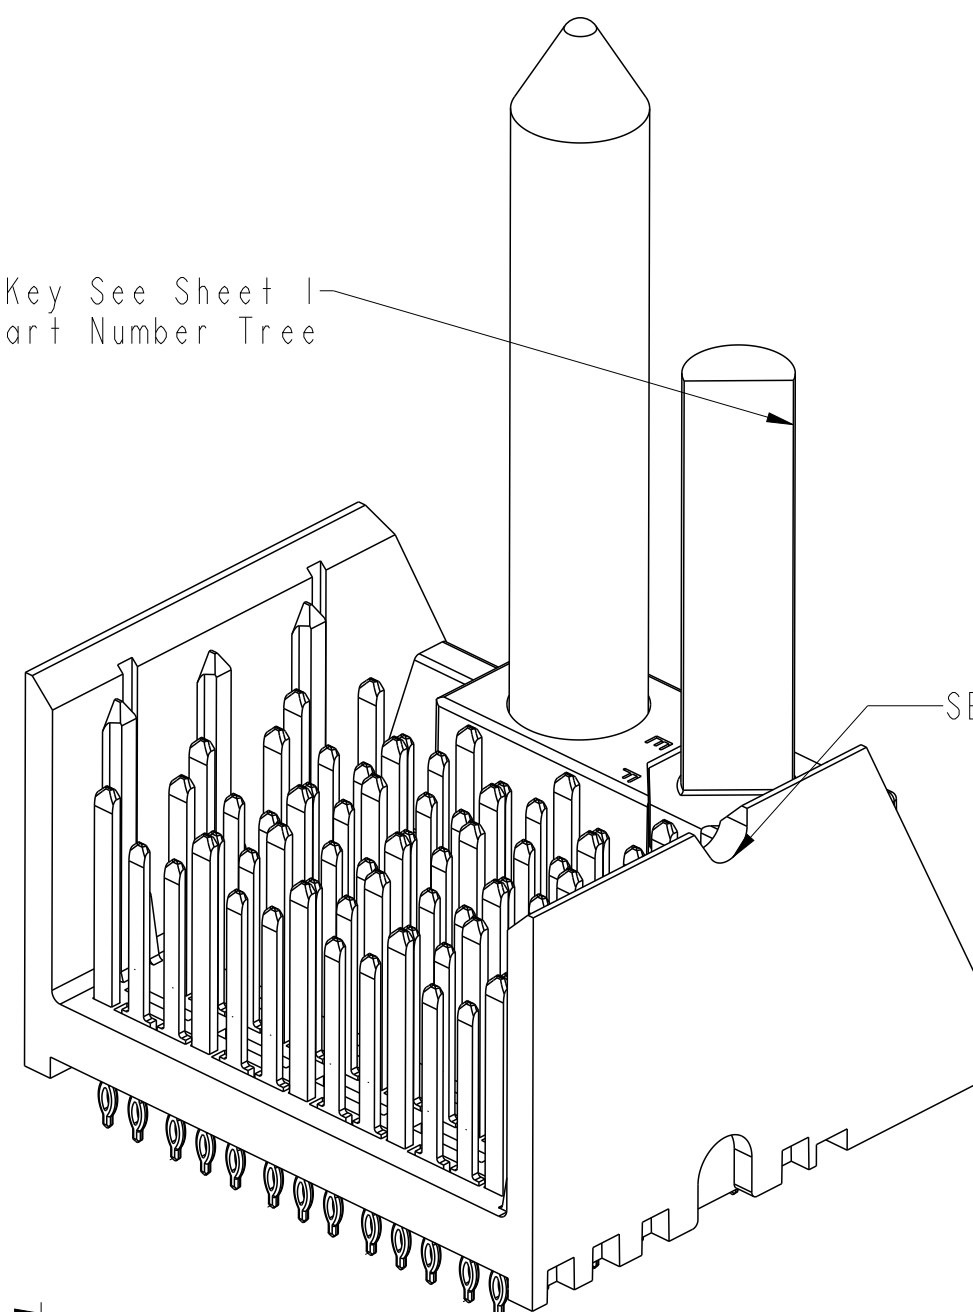


SEE NOTE 5

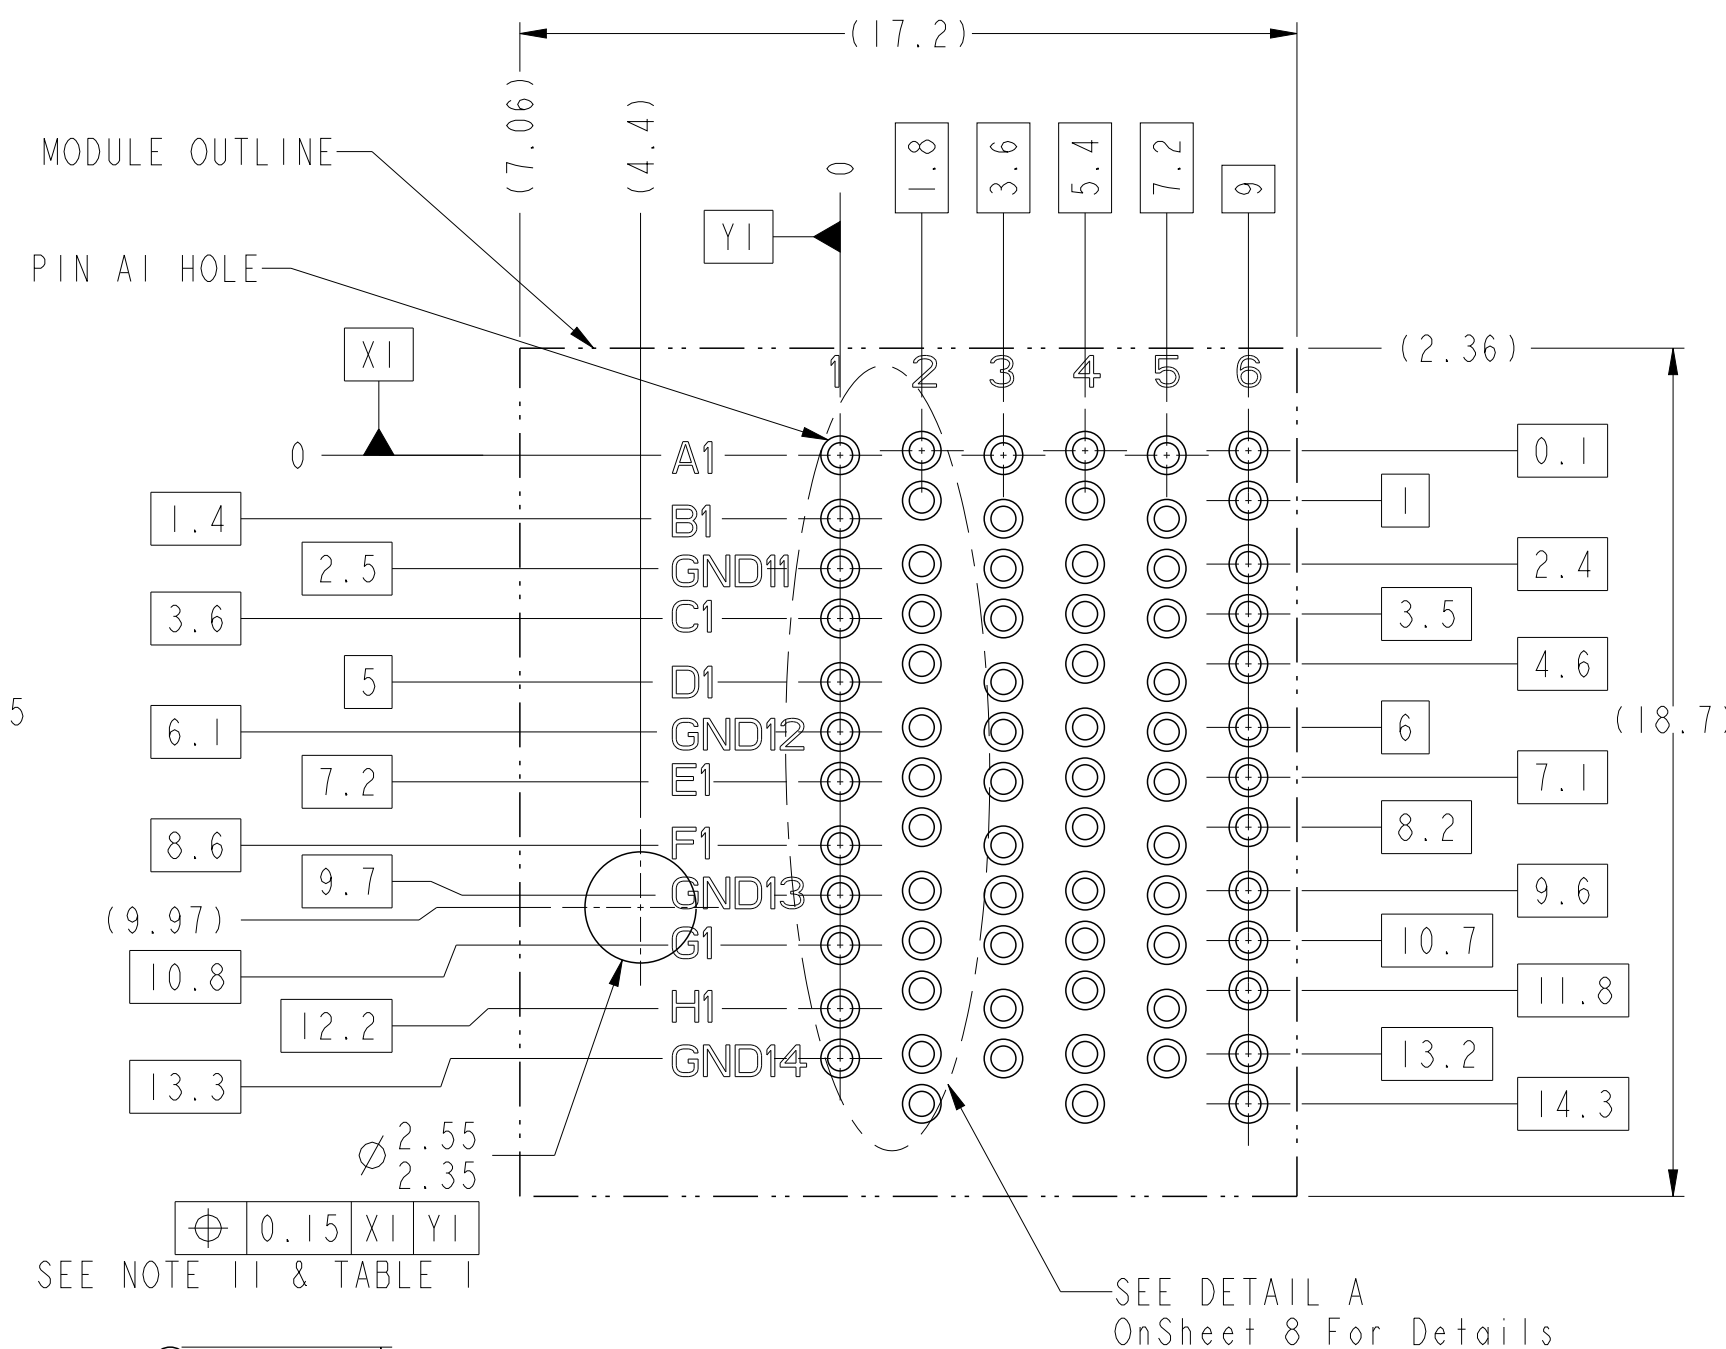

BP HOLE PATTERN COMPONENT SIDE
LEFT POLARIZING GUIDE MODULE
BACKPLANE FOOTPRINT

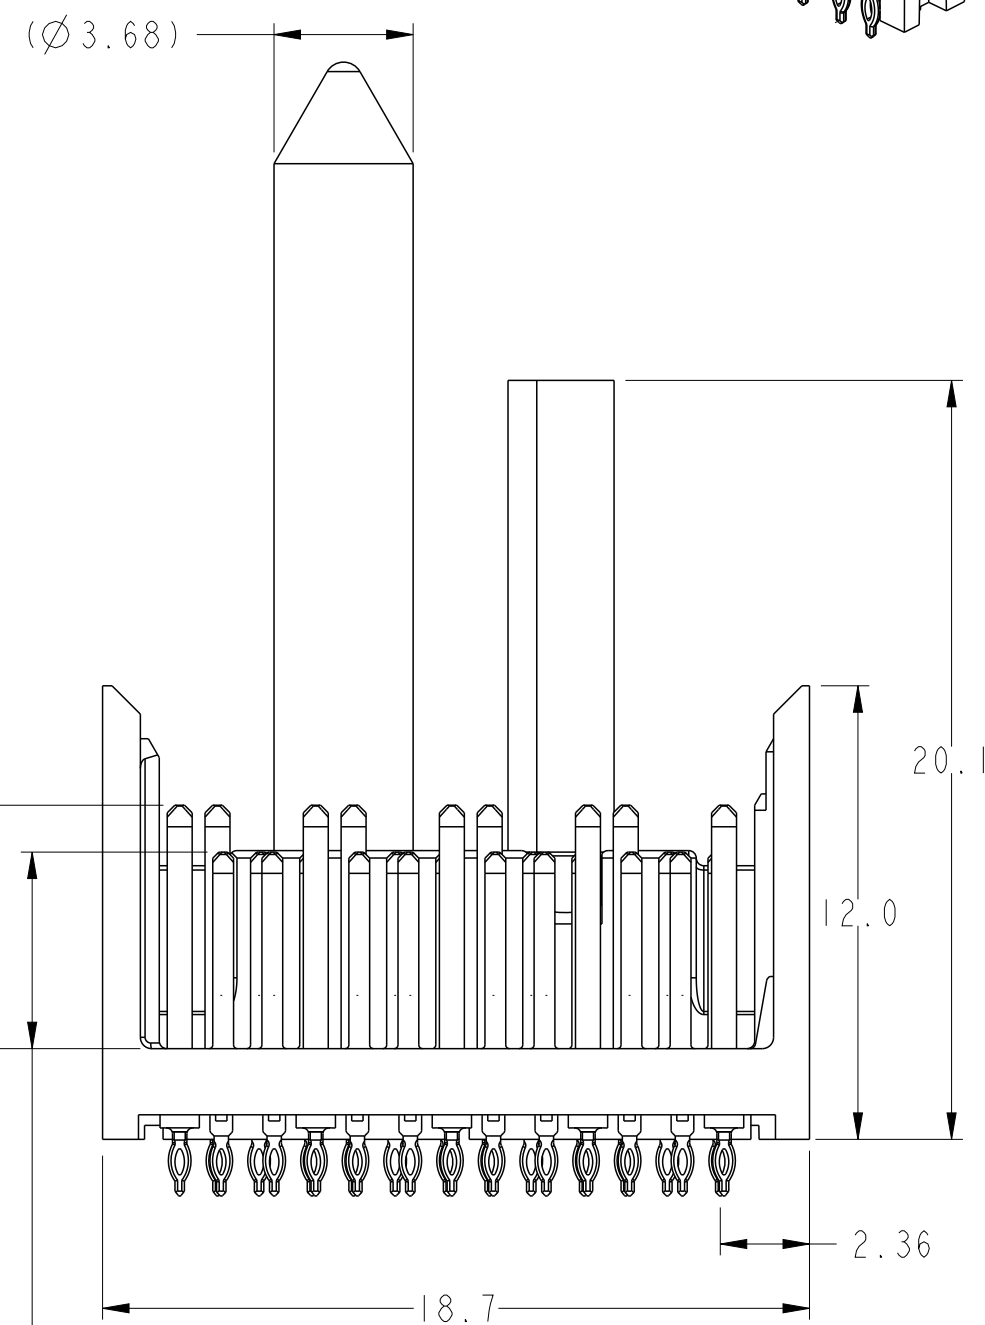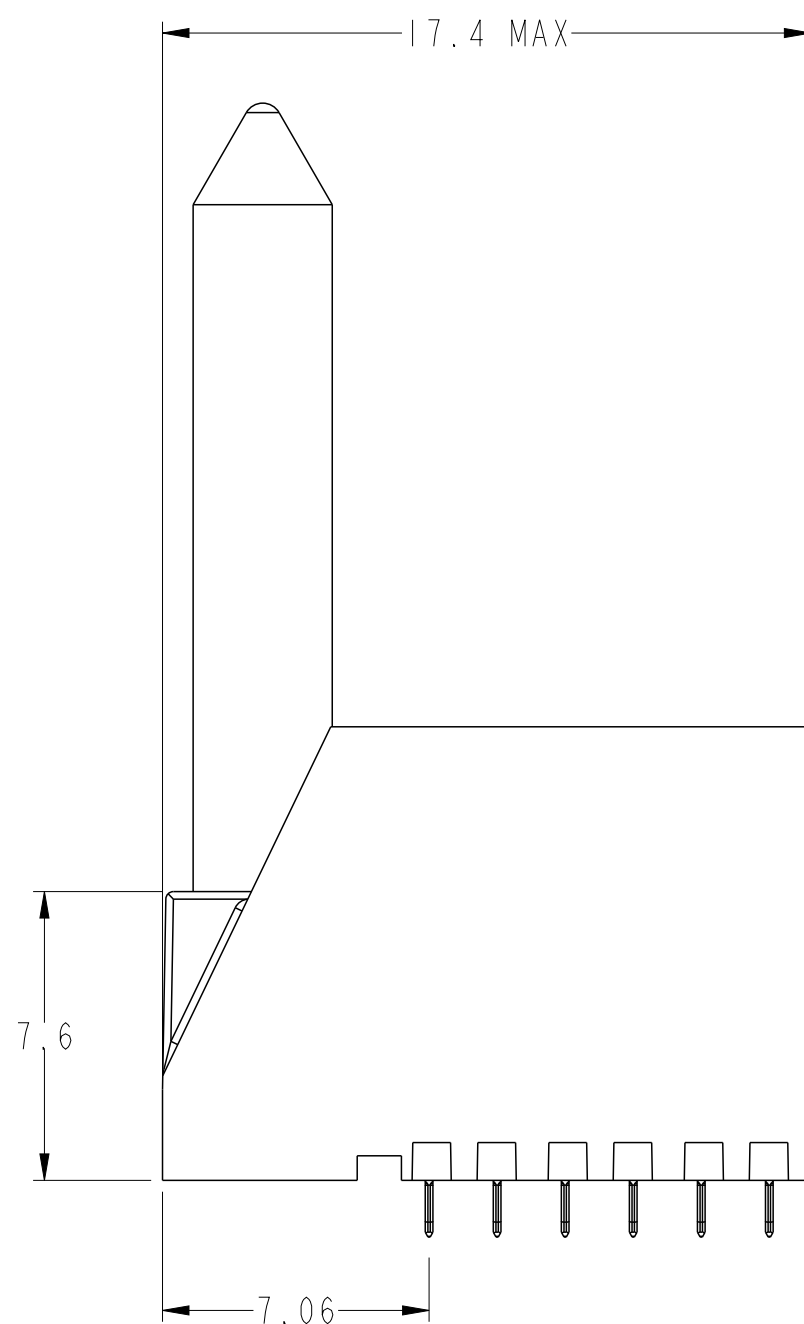

(5.2)
For 3MM Wipe Signal
(4.2)
For 2MM Wipe Signal
(6.4)
For 4MM Wipe Ground
(5.4)
For 3MM Wipe Ground

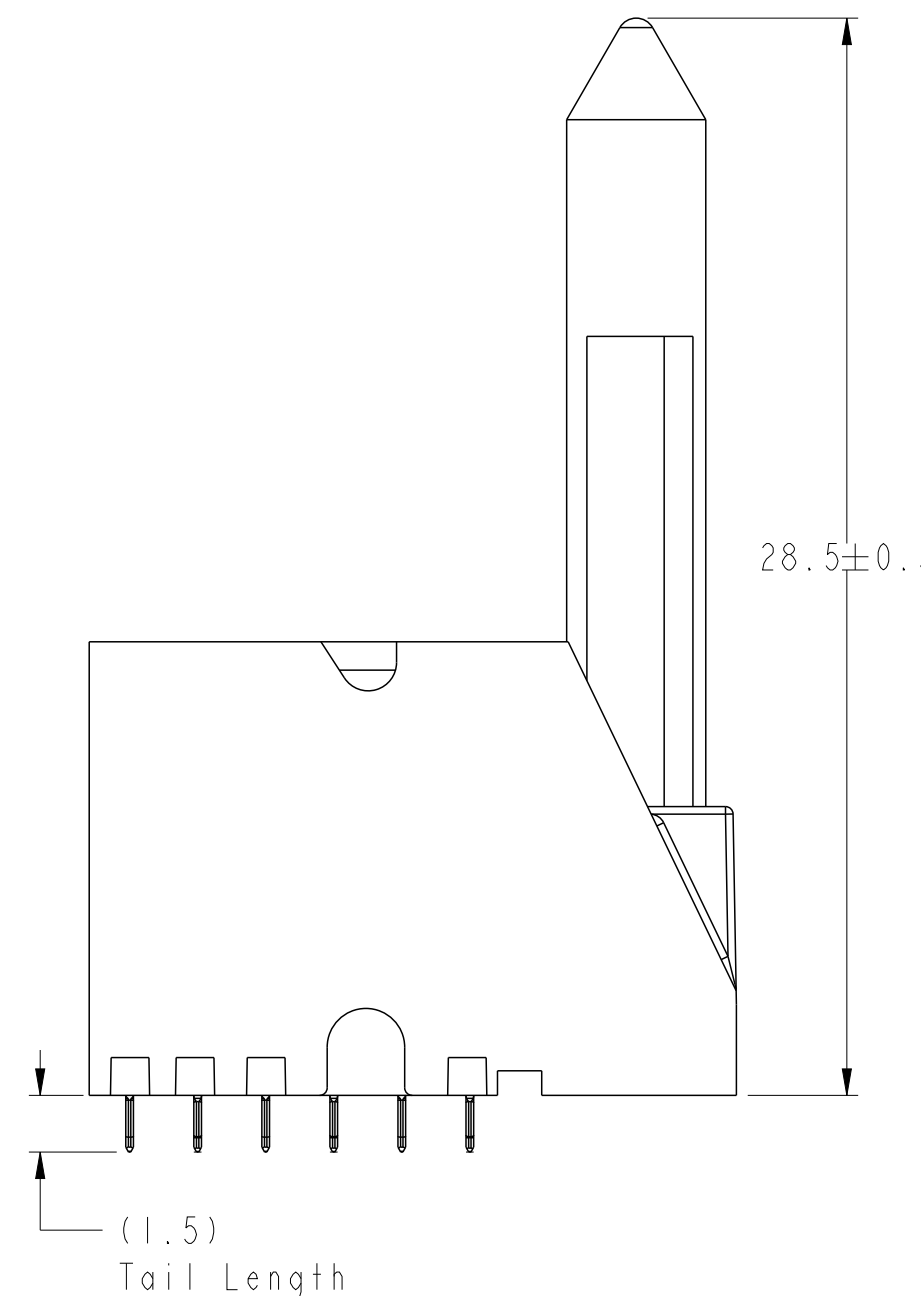


spec ref		-		dr		Yong-Keat Lim		2012/03/01		projection		mm		size		A2		scale		2:1	
tolerance std		ISO 406		eng		Sandar Soe		2016/03/08						ecn no		ELX-S-17624-1					
ISO 1101		TOLERANCES UNLESS OTHERWISE SPECIFIED		chr		-		-						rel level		Released					
				appr		Chen-Hong Tan		2016/03/17		product family		XCEDE HD									
surface		ISO 1302		linear		0.X		±0.3		MODULE ASSEMBLY, XCEDE HD		dwg no		10120128						rev	
						0.XX		±0.10		Vertical Header, 4 Pair 6 Column										C	
						0.XXX		±0.050													
				angular		0°		±2°													
						www.fci.com		cat. no.		-		Product - Customer Drw								sheet 6 of 8	



PDS: Rev :C

STATUS:Released




Printed: Mar 17, 2016

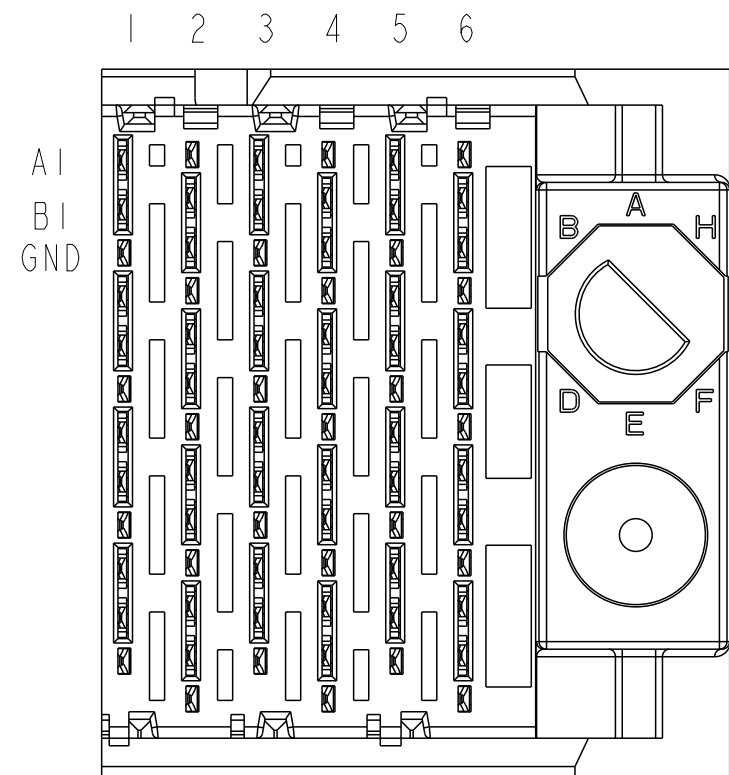


RIGHT POLARIZING/GUIDE MOUDLE

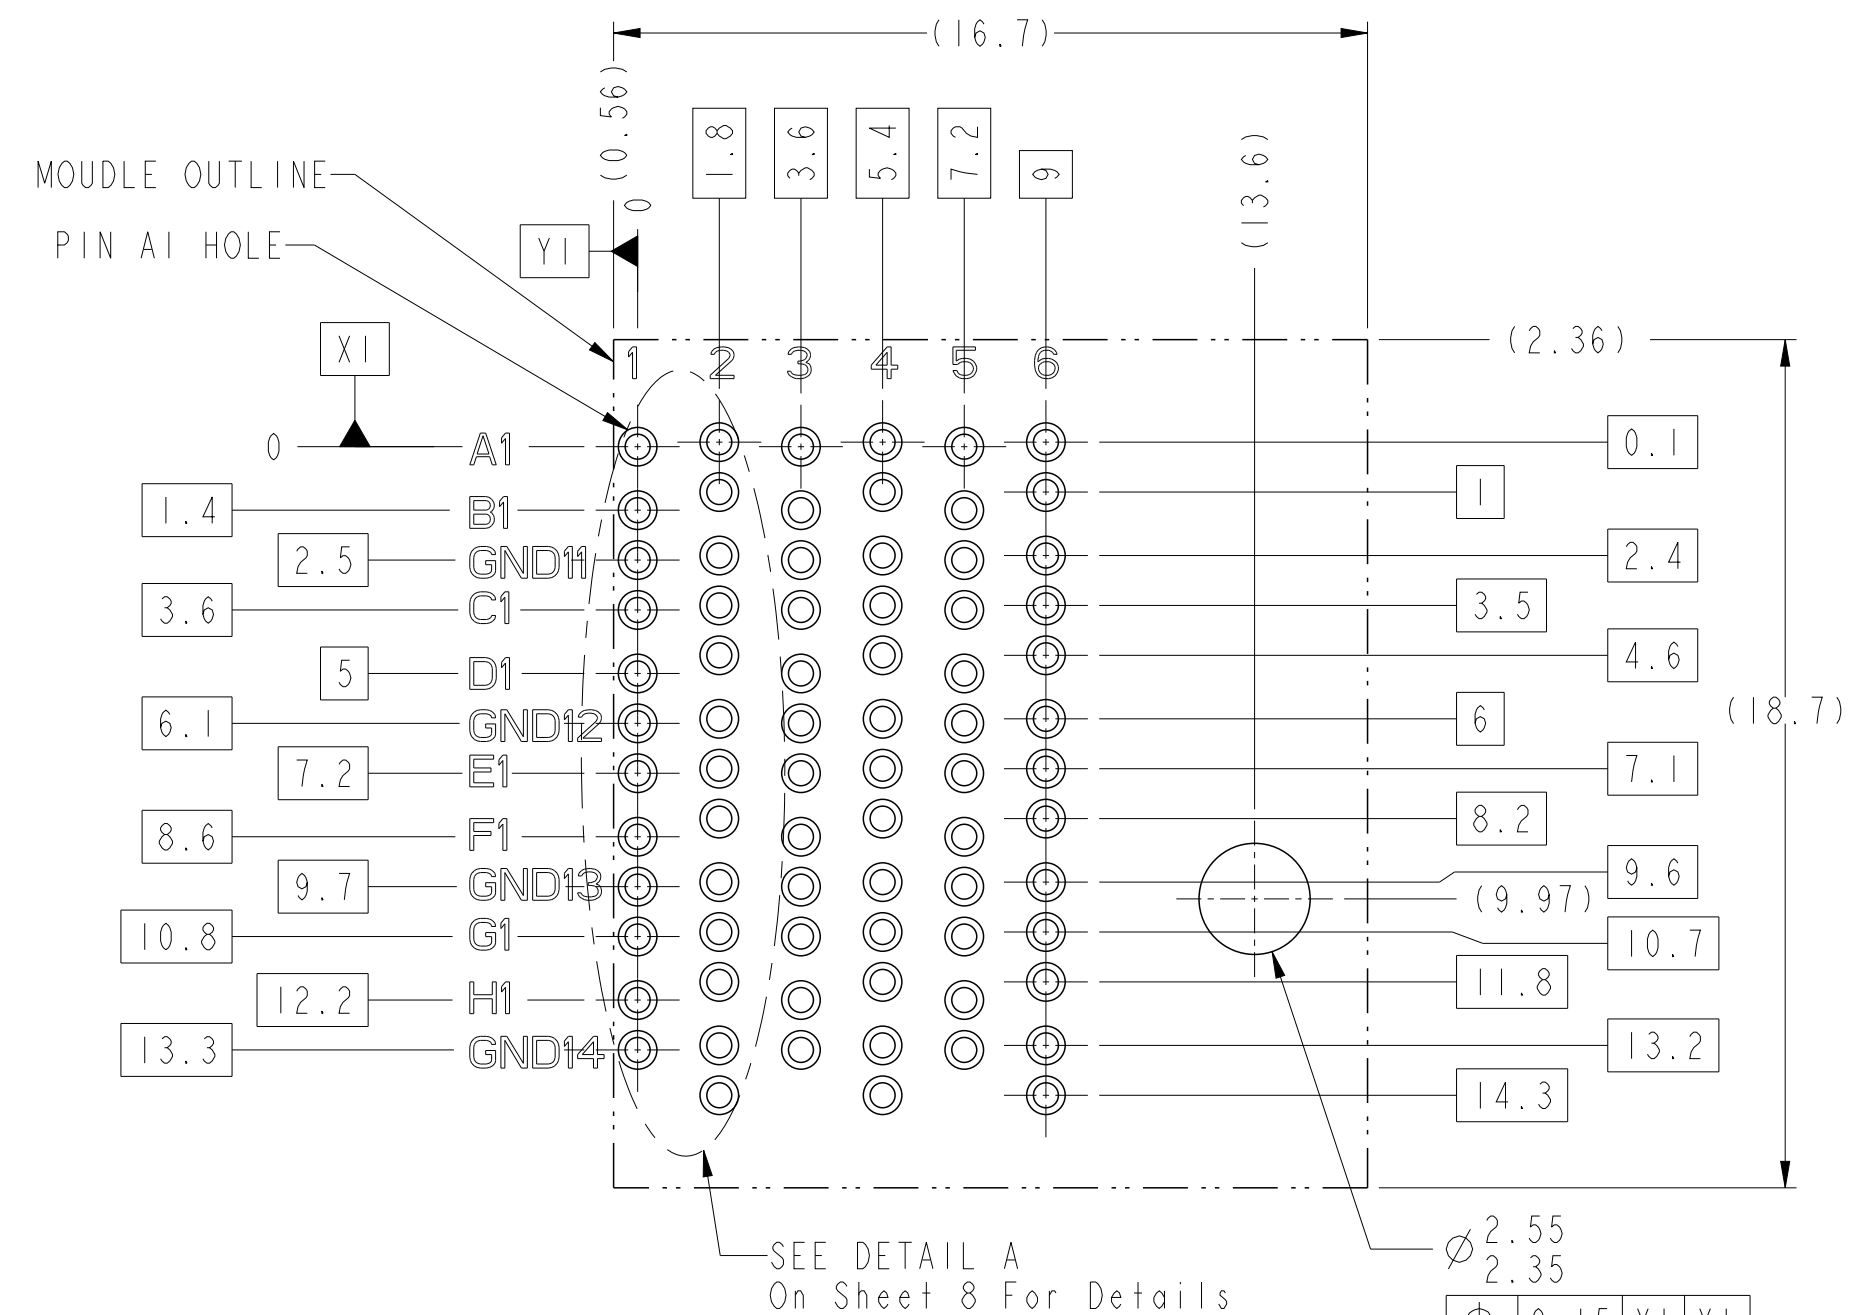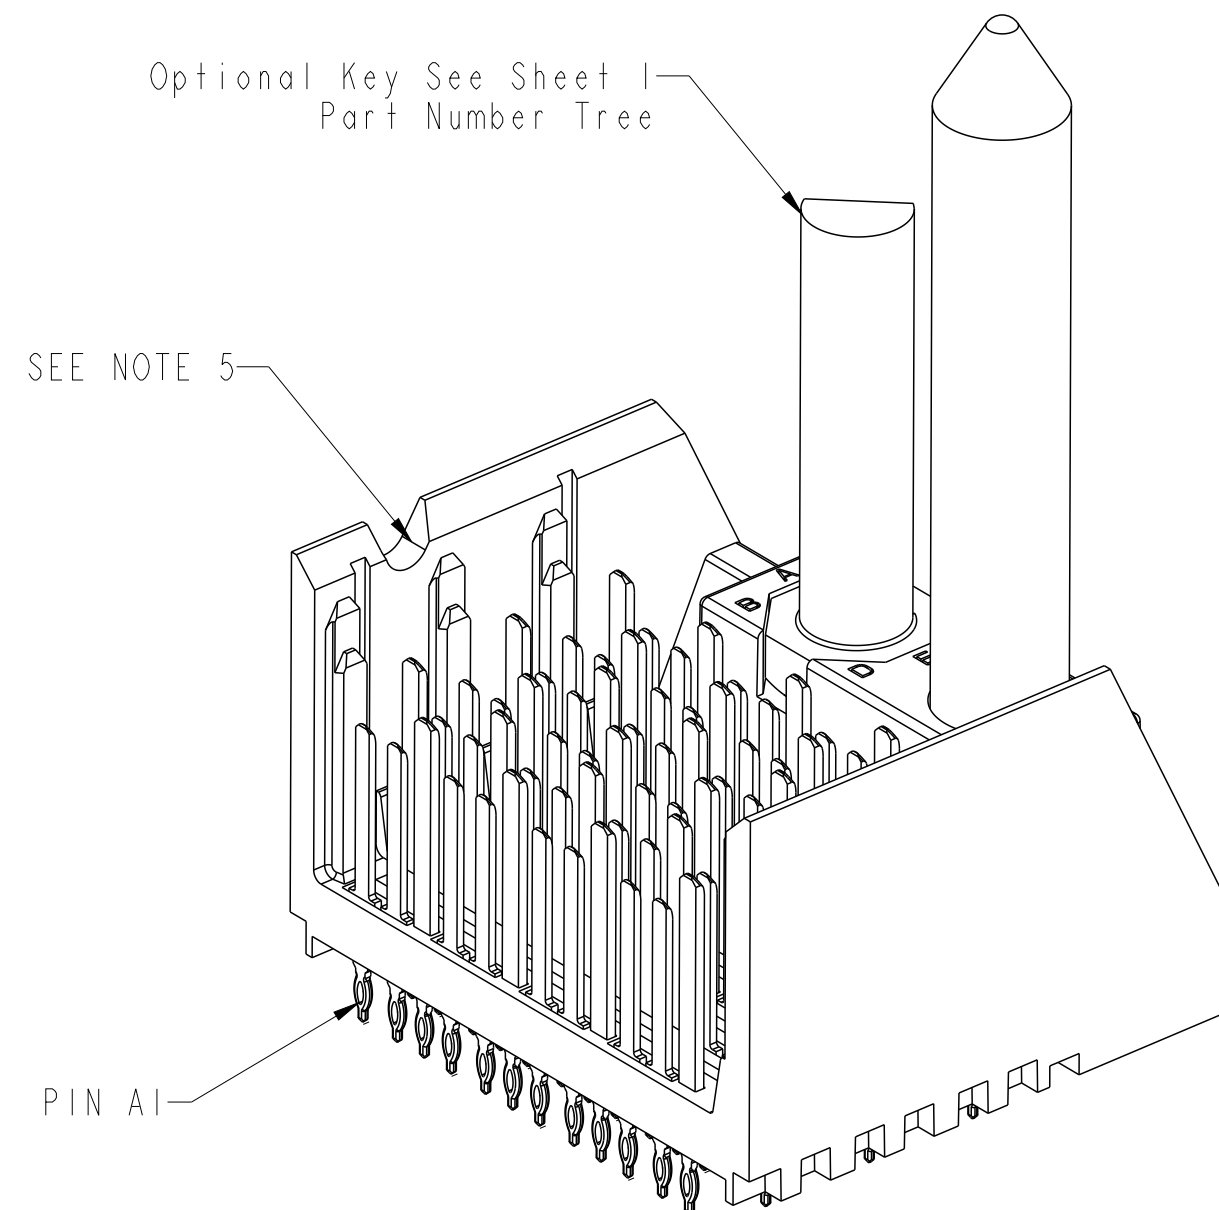

BP HOLE PATTERN COMPONENT SIDE RIGHT POLAIZING/GUIDE MODULE BACKPLANE FOOTPRINT

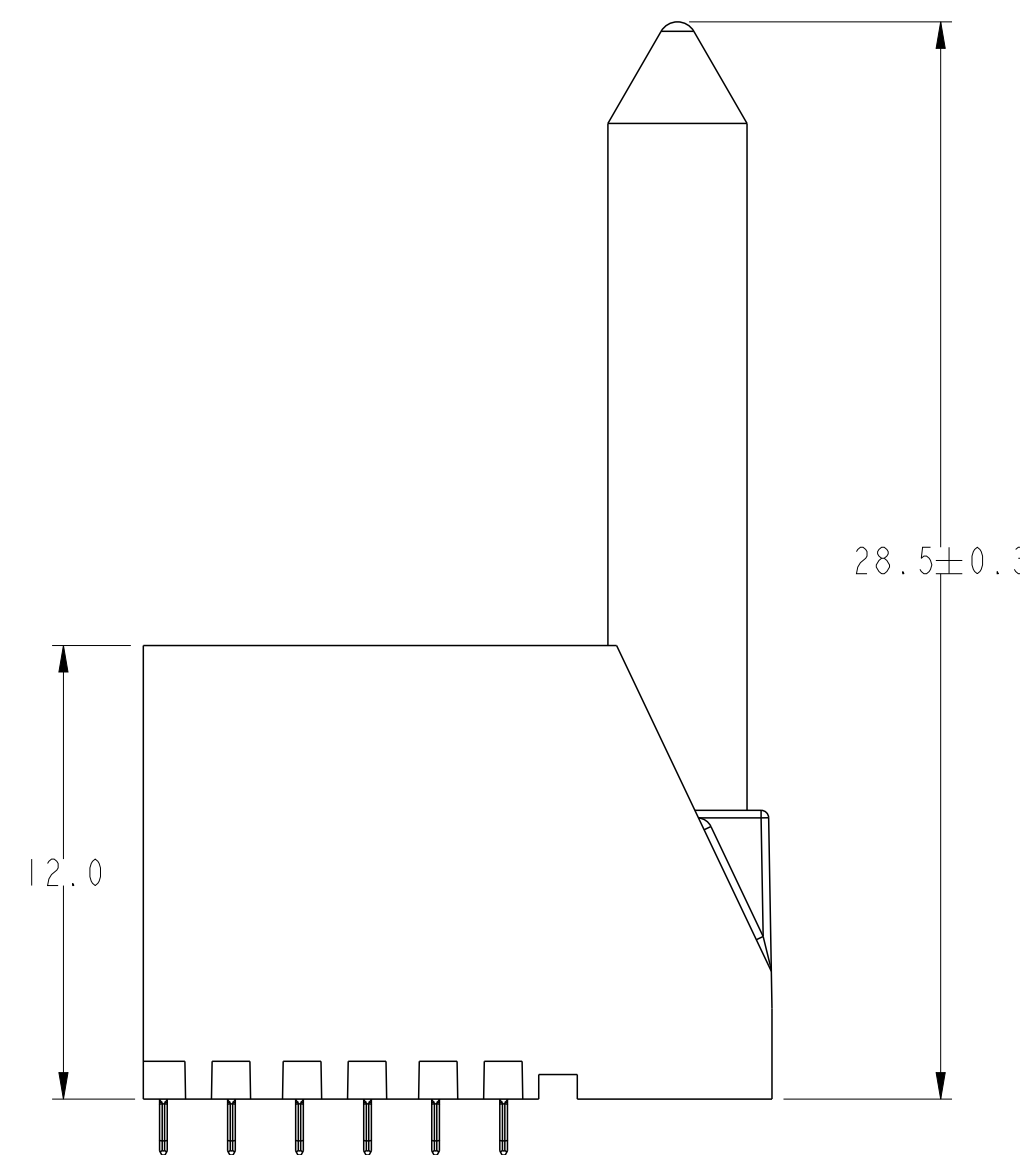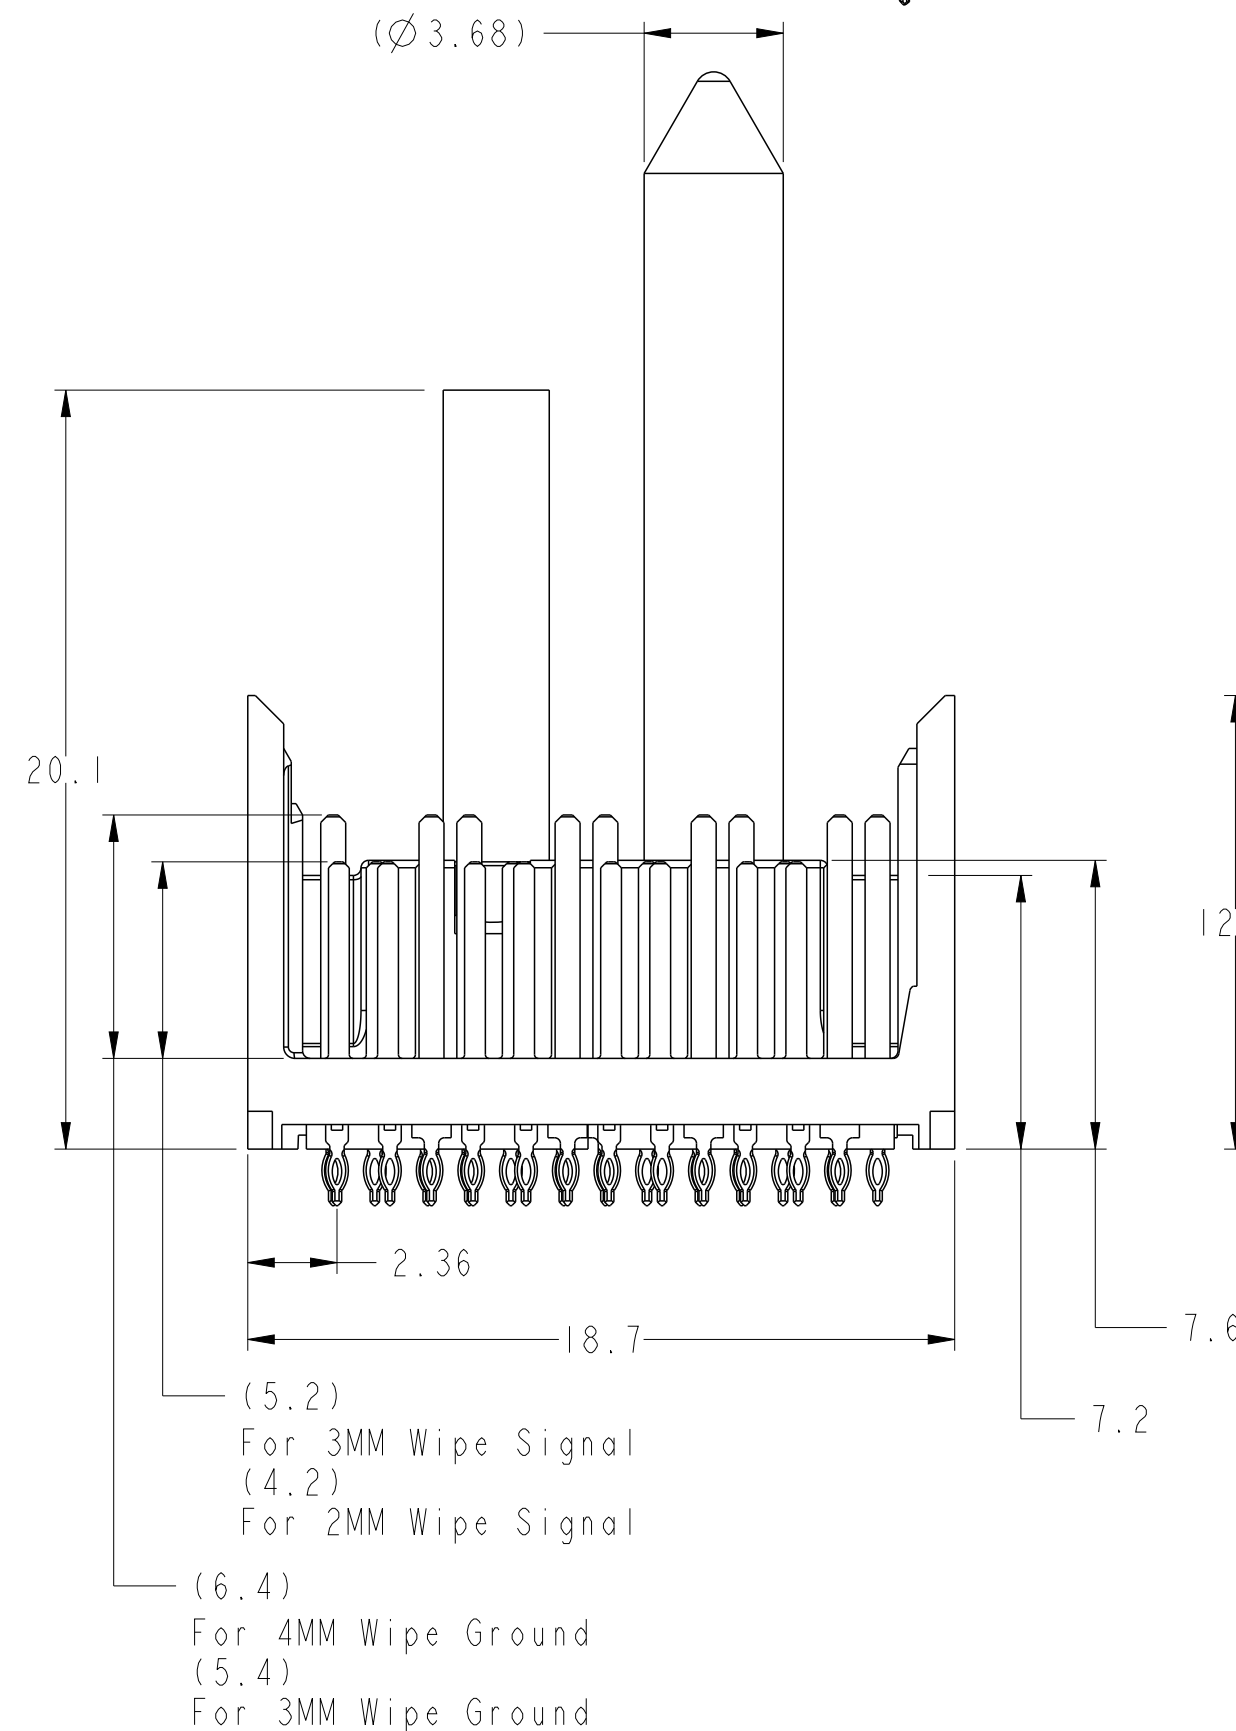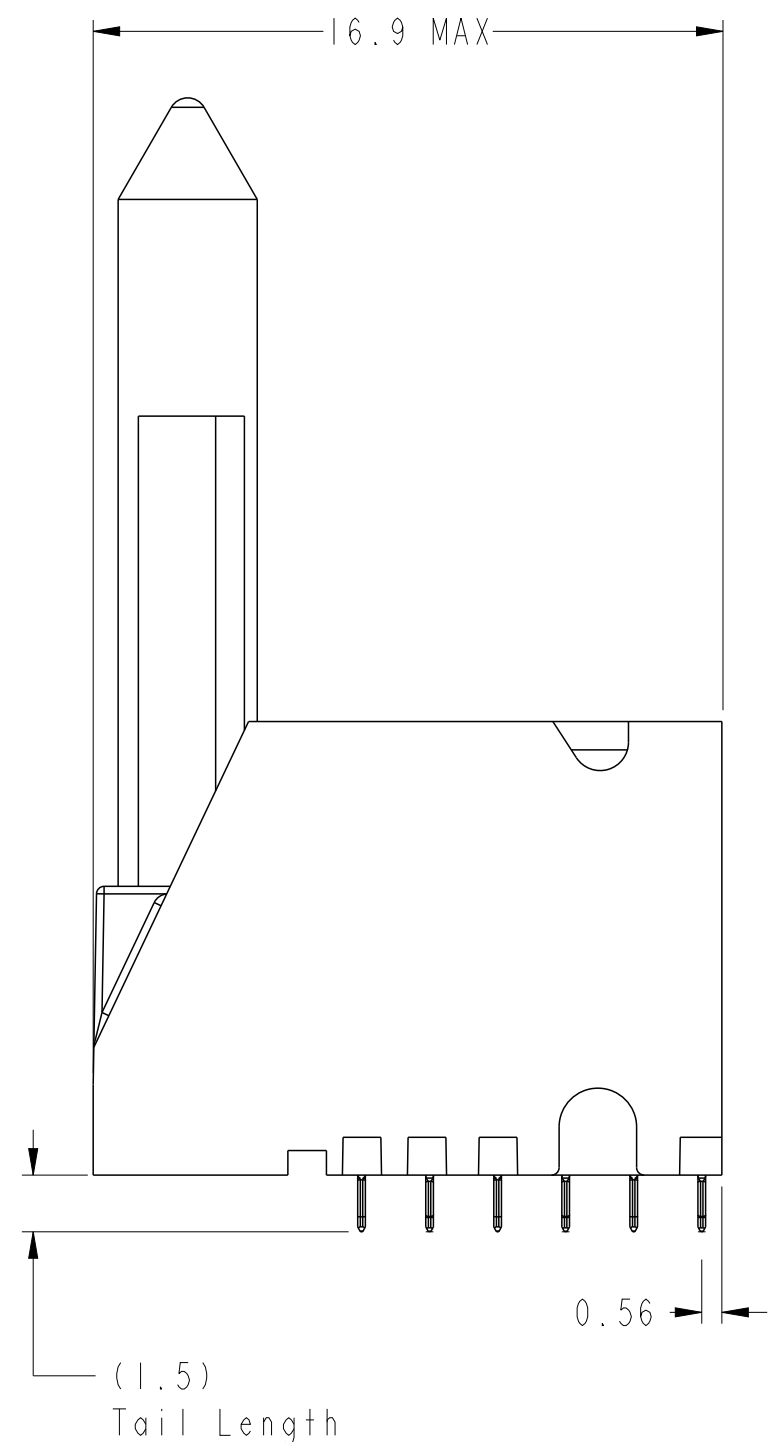

spec ref	-	dr	Yong-Keat Lim	2012/03/01	projection	mm	size	A2	scale	2:1
tolerance std	ISO 406 ISO 1101	eng	Sandar Soe	2016/03/08	chr	-	ecn no	ELX-S-17624-1	rel level	Released
surface	ISO 1302	appr	Chen-Hong Tan	2016/03/17	product family	XCEDE HD	cat. no.	10120128	sheet	7 of 8
TOLERANCES UNLESS OTHERWISE SPECIFIED		Amphenol FCI		MODULE ASSEMBLY, XCEDE HD		Vertical Header, 4 Pair 6 Column		rev		C
linear	0.X ±0.3 0.XX ±0.10 0.XXX ±0.050	angular	0° ±2°	www.fci.com		Product - Customer Drw		STATUS:Released		Printed: Mar 17, 2016

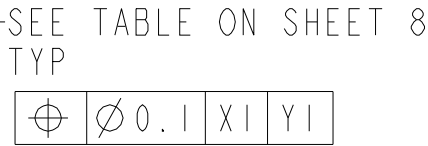

dr	Yong-Keat Lim	2012/03/01		mm	size	A2		ELI
eng	Sandar Soe	2016/03/08			ecn no			
chr	-	-			rel level	R		
appr	Chen-Hong Tan	2016/03/17			product family	XCEDE HD		
			MODULE ASSEMBLY, XCEDE HD Vertical Header, 4 Pair 6 Column			10120120		
www.fci.com			cat. no.	-	Product - Customer Drw			as

1. CONNECTOR MATERIALS
SHROUD : HIGH-TEMP POLYMER, COLOR : BLACK, UL94V-0
CONTACTS : HIGH PREFORMANCE COPPER ALLOY
2. PRODUCT SPECIFICATION : GS-12-0936
3. APPLICATION SPECIFICATION : GS-20-0348
4. PRODUCT MARKING :
PART NUMBER (10120128-X0C-XXXLF)
"FCI" AND DATE CODE (FCI P#####)
5. NOTCH DESIGNATES "ROW A" SIDE OF CONNECTOR. NOTCH FEATURE
ON OPPOSITE FOR PRODUCT MARKING.
6. PLATING THICKNESS OF SIGNAL & GROUND CONTACT ARE DETERMINED
BY PLATING CODE, REFER TO P/N TREE ON SHEET 1.
7. PACKAGING MEETS GS-14-920 LEAD-FREE LABELING SPECIFICATION.
8. GUIDE-PIN STYLE DESIGNATION ONLY APPLIES TO MODULE VERSIONS
THAT REQUIRE GUIDE-PIN HARDWARE. FOR ALL NON-GUIDE-PIN VERSIONS,
THE DEFAULT DASH-NUMBER DIGIT IN THAT LOCATION IS STILL "0".
9. SEE APPLICATION SPECIFICATION FOR ROUTING GUIDELINES, ADDITIONAL
PTH GUIDELINES, MATED DIMENSIONS, GUIDE PIN SELECTION, ETC.
10. A SYMBOL WILL BE NEXT TO ANY DIMENSION, VIEW OR NOTE THAT
HAS BEEN MODIFIED WITH THE CURRENT DRAWING REVISION.
11. OPTIONAL HOLE LOCATION FOR GROUNDED PIN OR ADDITIONAL GUIDE-PIN SUPPORT
SEE TABLE 1 SHEET 1 FOR ADDITIONAL DETAILS.
12. SCREW IS OPTIONAL AND ENGAGES WITH BOTTOM OF GUIDE PIN FROM BENEATH
THE PCB FOR ADDITIONAL GUIDE-PIN SUPPORT.

5	PDS: Rev :C	STATUS:Released	Printed: Mar 17, 2016
---	-------------	-----------------	-----------------------