

HC-HV 6-TFQ-65/O1M25S

Order No.: 1604936


The illustration shows a sleeve housing in the versions for double locking latch and single locking latch and with double locking latch, with straight cable exit



<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1604936>

HEAVYCON sleeve housing HV6, for double locking latch, height 45 mm, with support 1x M25, lateral conductor exit

Commercial data

GTIN (EAN)	
Note	Made-to-order
sales group	D003
Pack	10 pcs.
Customs tariff	85389099
Catalog page information	Page 246 (PC-2005)

Product notes

WEEE/RoHS-compliant since:
01/31/2006



<http://www.download.phoenixcontact.com>
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

Technical data

General data

Note	For contact inserts HV-HV6
Design	HV6
Height	65 mm
Width	43 mm
Length	94 mm

Housing type	Sleeve housings
Locking type	For double locking latch
Cable exit	Lateral
Type of the screw connection	1x M25
Degree of protection	IP65
Ambient temperature (operation)	-40 °C ... 125 °C
Housing material	Aluminum, die-cast
Housing surface material	Powder-coated, gray

Certificates / Approvals




Certification

GOST

Diagrams/Drawings

Dimensioned drawing

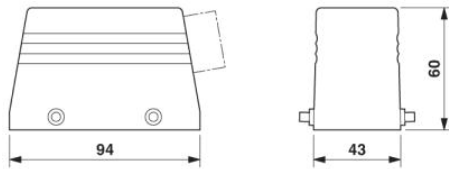

Address

PHOENIX CONTACT Inc., USA
586 Fulling Mill Road
Middletown, PA 17057, USA
Phone (800) 888-7388
Fax (717) 944-1625
<http://www.phoenixcon.com>



© 2011 Phoenix Contact
Technical modifications reserved;