

VC-AL-T2-R-M20-S

Order No.: 1583652



<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1583652>

Aluminum die-cast sleeve housing, with grommet, locking screws with knurled head, for a metric M20 cable gland, angled cable outlet, type VC2

Commercial data

GTIN (EAN)	4 046356 183284 
Note	Made-to-order
sales group	D201
Pack	5 pcs.
Customs tariff	85369010
Catalog page information	Page 365 (PC-2009)

Product notes

WEEE/RoHS-compliant since:
02/12/2008



<http://www.download.phoenixcontact.com>
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

Technical data

General data

Note	When using fiber optics, the bending radii of the cable manufacturers must be observed.
Design	VC2
Color	gray aluminum


Locking type	Screw locking, knurled head
Tightening torque, mounting screw	1.5 Nm $\pm$ 0.3 Nm
Fixing screws	M4
No. of cable exits	1
Cable exit	Angled
Type of the screw connection	M20 x 1.5
Pg screw connection	None
Degree of protection	IP65/IP68/IP69K
Ambient temperature (operation)	-40 °C ... 125 °C
Housing material	Aluminum, die-cast
Seal material	NBR, conductive
Material of locking screw	Nickel-plated brass
Inflammability class acc. to UL 94	V0

Accessories

Item	Designation	Description
General		
0806628	GPE 22X22 SR/R	Plastic label sheet, self-adhesive double-layer plastic labels, with rounded edges, radius 2 mm, material thickness: 0.8 mm, suitable for plotting and engraving, color: silver

Diagrams/Drawings

Dimensioned drawing

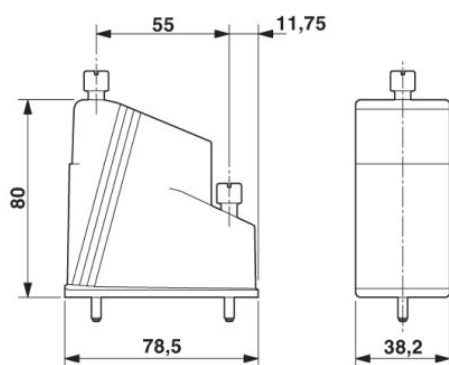

Address

PHOENIX CONTACT Inc., USA
586 Fulling Mill Road
Middletown, PA 17057, USA
Phone (800) 888-7388
Fax (717) 944-1625
<http://www.phoenixcon.com>



© 2010 Phoenix Contact
Technical modifications reserved;