


# HC-B 6-TFL-72/O1STM25S

Order No.: 1644944



<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1644944>

HEAVYCON sleeve housing B 6, for single locking latch, height 72 mm, without support 1xM25, lateral conductor exit

Commercial data	
GTIN (EAN)	 4 017918 912772
sales group	D002
Pack	10 pcs.
Customs tariff	85389099
Catalog page information	Page 570 (PC-2011)

### Product notes

WEEE/RoHS-compliant since:  
01/31/2006



<http://www.download.phoenixcontact.com>  
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.


## Technical data

General data	
Note	For contact inserts HC-B6, BB10, DD24, M Tall housings for extra large wiring space
Design	B6
Height	72 mm
Width	43 mm

Length	60 mm
Housing type	Sleeve housings
Locking type	for single locking latch
No. of cable exits	1
Cable exit	Lateral
Pg screw connection	None
Type of the screw connection	1x M25
Degree of protection	IP65
Ambient temperature (operation)	-40 °C ... 125 °C
Housing material	Aluminum, die-cast
Housing surface material	Powder-coated, gray

### Diagrams/Drawings

Dimensioned drawing

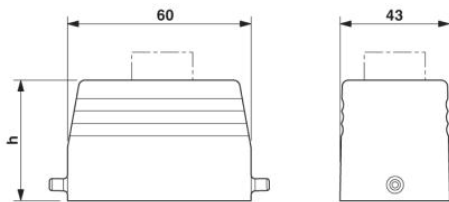

**Address**

PHOENIX CONTACT Inc., USA  
586 Fulling Mill Road  
Middletown, PA 17057, USA  
Phone (800) 888-7388  
Fax (717) 944-1625  
<http://www.phoenixcon.com>



© 2011 Phoenix Contact  
Technical modifications reserved;