


**HC-B 6-TFL-72/O1M25G**

Order No.: 1604735

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1604735>

HEAVYCON sleeve housing B6, for single locking latch, height 72 mm,  
with support 1x M25, straight conductor exit

**Commercial data**

GTIN (EAN)	 4 017918 882440
sales group	D002
Pack	10 pcs.
Customs tariff	85389099
Catalog page information	Page 570 (PC-2011)

**Product notes**

WEEE/RoHS-compliant since:  
01/31/2006



[http://  
www.download.phoenixcontact.com](http://www.download.phoenixcontact.com)  
Please note that the data given  
here has been taken from the  
online catalog. For comprehensive  
information and data, please refer  
to the user documentation. The  
General Terms and Conditions of  
Use apply to Internet downloads.

**Technical data****General data**

Note	For contact inserts HC-B6, BB10, DD24, M Tall housings for extra large wiring space
Design	B6
Height	72 mm
Width	53 mm

Length	60 mm
Housing type	Sleeve housings
Locking type	for single locking latch
No. of cable exits	1
Cable exit	Straight
Pg screw connection	None
Type of the screw connection	1x M25
Degree of protection	IP65
Ambient temperature (operation)	-40 °C ... 125 °C
Housing material	Aluminum, die-cast
Housing surface material	Powder-coated, gray

### Certificates / Approvals




Certification

GOST

### Diagrams/Drawings

Dimensioned drawing

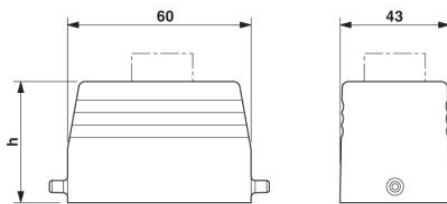

**Address**

PHOENIX CONTACT Inc., USA  
586 Fulling Mill Road  
Middletown, PA 17057, USA  
Phone (800) 888-7388  
Fax (717) 944-1625  
<http://www.phoenixcon.com>



© 2011 Phoenix Contact  
Technical modifications reserved;